

TEST DATA OF LHA100F-36

Regulated DC Power Supply
September 5, 2019

Approved by : Junya Kaneda
Junya Kaneda Design Manager

Prepared by : Shuto Takai
Shuto Takai Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Load Current)	1
2.Efficiency (by Load Current)	2
3.Power Factor (by Load Current)	3
4.Inrush Current	4
5.Leakage Current	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple-Noise (by Load Current)	9
10.Ambient Temperature Drift	10
11.Rise and Fall Time	11
12.Hold-Up Time	12
13.Instantaneous Interruption Compensation	13
14.Minimum Input Voltage for Regulated Output Voltage	14
15.Overcurrent Protection	15
16.Overvoltage Protection	16
17.Figure of Testing Circuitry	17

(Final Page 18)

COSEL

Model		LHA100F-36		Temperature 25°C																																																				
Item		Input Current (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph		<div><div><div>—△—</div><div>Input Volt.</div><div>100V</div></div><div><div>- - -□- -</div><div>Input Volt.</div><div>200V</div></div><div><div>- · -○- · -</div><div>Input Volt.</div><div>230V</div></div></div> <div><div><div>2.0</div><div>1.5</div><div>1.0</div><div>0.5</div><div>0.0</div></div><div><div>0.0</div><div>1.0</div><div>2.0</div><div>3.0</div></div></div> <div><div>Input Current [A]</div><div>Load Current [A]</div></div>		2.Values																																																				
		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>0.053</td><td>0.088</td><td>0.101</td></tr><tr><td>0.50</td><td>0.245</td><td>0.188</td><td>0.188</td></tr><tr><td>1.00</td><td>0.448</td><td>0.280</td><td>0.269</td></tr><tr><td>1.50</td><td>0.651</td><td>0.373</td><td>0.351</td></tr><tr><td>2.00</td><td>0.857</td><td>0.469</td><td>0.434</td></tr><tr><td>2.80</td><td>1.186</td><td>0.624</td><td>0.568</td></tr><tr><td>3.08</td><td>1.301</td><td>0.678</td><td>0.615</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>				Load Current [A]	Input Current [A]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.053	0.088	0.101	0.50	0.245	0.188	0.188	1.00	0.448	0.280	0.269	1.50	0.651	0.373	0.351	2.00	0.857	0.469	0.434	2.80	1.186	0.624	0.568	3.08	1.301	0.678	0.615	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																							
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																					
0.00	0.053	0.088	0.101																																																					
0.50	0.245	0.188	0.188																																																					
1.00	0.448	0.280	0.269																																																					
1.50	0.651	0.373	0.351																																																					
2.00	0.857	0.469	0.434																																																					
2.80	1.186	0.624	0.568																																																					
3.08	1.301	0.678	0.615																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								

-

1




-

BC-11417

[illegible]

COSEL

Model	LHA100F-36	Temperature 25°C Testing Circuitry Figure A	
Item	Inrush Current		
Object	_____		

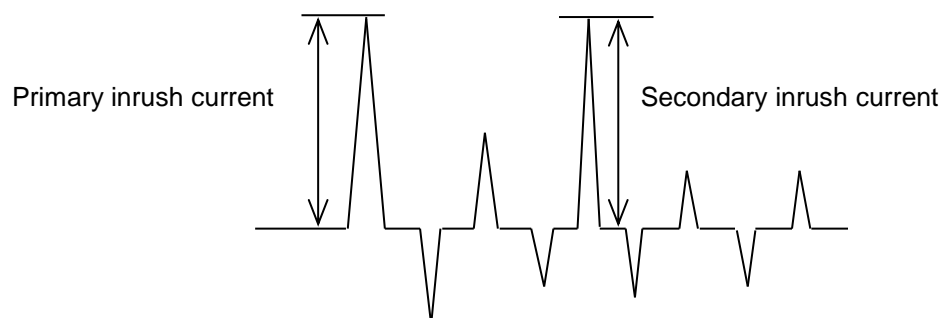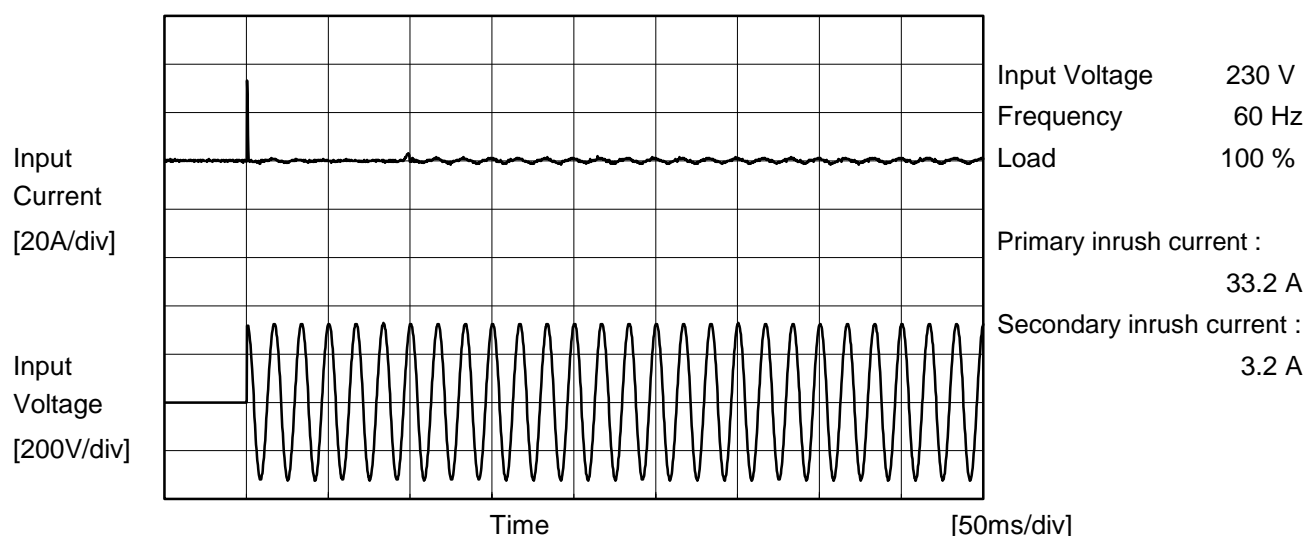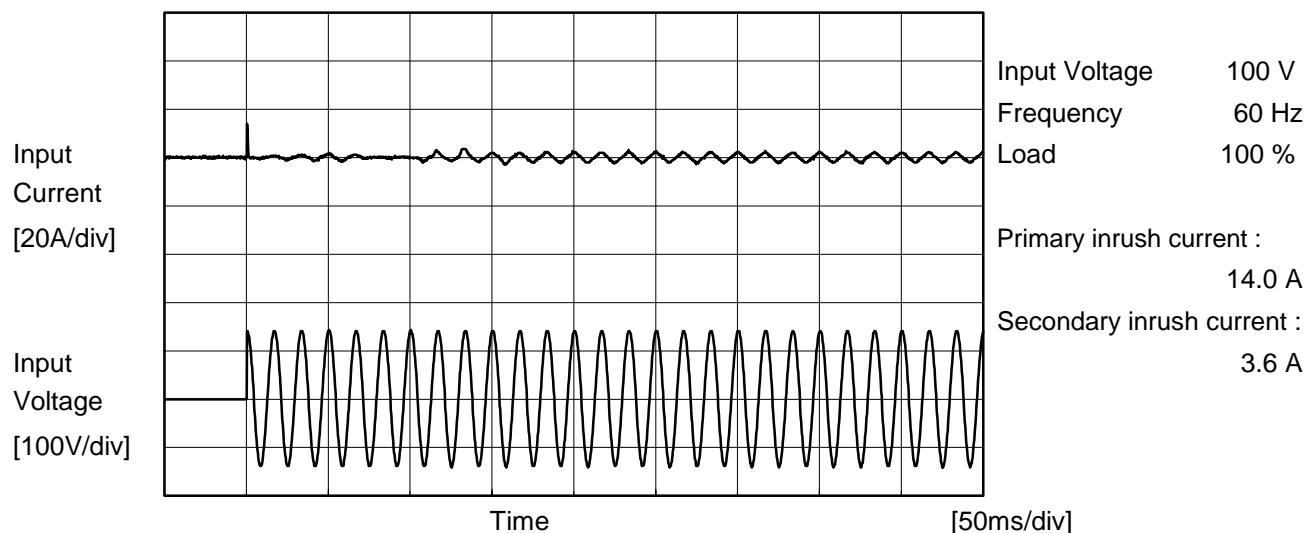



Model		LHA100F-36	Temperature 25°C Testing Circuitry Figure B
Item		Leakage Current	
Object		_____	

1.Results

[mA]

Standards	Testing Circuitry	Measuring Method	Input Volt.			Note
			100 [V]	230 [V]	240 [V]	
DEN-AN	Figure B-1	Both phases	0.16	0.33	0.34	Operation
		One of phases	0.25	0.65	0.67	Stand by
IEC62368-1	Figure B-2	Both phases	0.11	0.26	0.27	Operation
		One of phases	0.20	0.52	0.54	Stand by
	Figure B-3	Both phases	0.10	0.26	0.27	Operation
		One of phases	0.20	0.52	0.55	Stand by

The value for "One of phases" is the reference value only.

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

COSEL


LHA100F-36		Temperature 25°C																																	
Model	LHA100F-36	Testing Circuitry Figure A																																	
Item	Line Regulation																																		
Object	+36V2.8A																																		
1.Graph		2.Values																																	
<div><div><div><div>---</div><div>□</div><div>---</div></div><div>Load 50%</div></div><div><div>—</div><div>△</div><div>—</div></div><div>Load 100%</div></div> <table><thead><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>85</td><td>36.176</td><td>-</td></tr><tr><td>90</td><td>36.176</td><td>36.173</td></tr><tr><td>100</td><td>36.176</td><td>36.173</td></tr><tr><td>120</td><td>36.176</td><td>36.173</td></tr><tr><td>200</td><td>36.176</td><td>36.173</td></tr><tr><td>230</td><td>36.176</td><td>36.173</td></tr><tr><td>264</td><td>36.176</td><td>36.173</td></tr><tr><td>280</td><td>36.176</td><td>36.173</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table> <p>Note: Slanted line shows the range of the rated input voltage.</p>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	85	36.176	-	90	36.176	36.173	100	36.176	36.173	120	36.176	36.173	200	36.176	36.173	230	36.176	36.173	264	36.176	36.173	280	36.176	36.173	--	-	-		
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
85	36.176	-																																	
90	36.176	36.173																																	
100	36.176	36.173																																	
120	36.176	36.173																																	
200	36.176	36.173																																	
230	36.176	36.173																																	
264	36.176	36.173																																	
280	36.176	36.173																																	
--	-	-																																	
		BC-11417																																	

Model	LHA100F-36		
Item	Load Regulation	Temperature	25°C
Object	+36V2.8A	Testing Circuitry	Figure A
<p>1.Graph</p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○ </p> <p> △□○</p>			

COSEL

Model	LHA100F-36	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+36V2.8A		


Input Volt. 230 V
Cycle 1000 ms

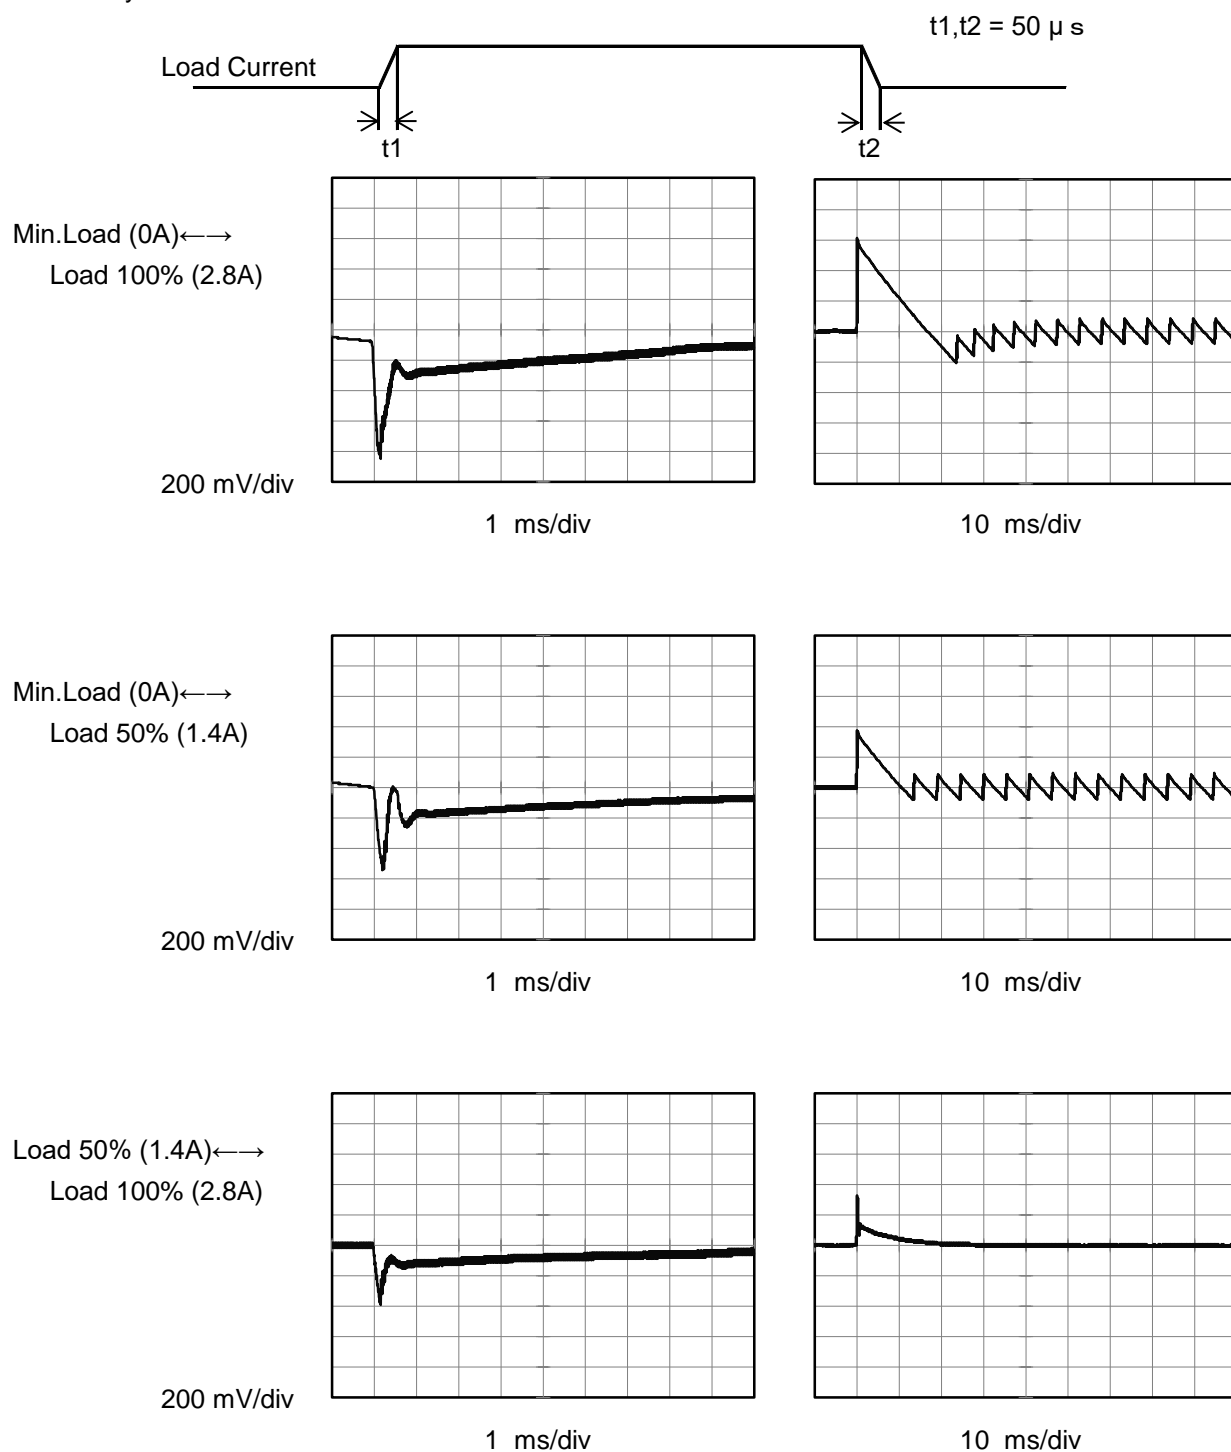

Model		LHA100F-36		Temperature 25°C																																							
Item		Ripple-Noise (by Load Current)		Testing Circuitry Figure B																																							
Object		+36V2.8A																																									
1.Graph				2.Values																																							
<div><div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div><div>Input Volt. 100V</div><div>Input Volt. 230V</div></div></div><p>Measured by 20 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple-Noise [mV]</th></tr><tr><th>Input Volt. 100 [V]</th><th>Input Volt. 230 [V]</th></tr><tr><td>0.00</td><td>195</td><td>195</td></tr><tr><td>0.50</td><td>45</td><td>45</td></tr><tr><td>1.00</td><td>55</td><td>55</td></tr><tr><td>1.50</td><td>50</td><td>50</td></tr><tr><td>2.00</td><td>75</td><td>75</td></tr><tr><td>2.80</td><td>65</td><td>65</td></tr><tr><td>3.08</td><td>75</td><td>75</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple-Noise [mV]		Input Volt. 100 [V]	Input Volt. 230 [V]	0.00	195	195	0.50	45	45	1.00	55	55	1.50	50	50	2.00	75	75	2.80	65	65	3.08	75	75	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																										
	Input Volt. 100 [V]	Input Volt. 230 [V]																																									
0.00	195	195																																									
0.50	45	45																																									
1.00	55	55																																									
1.50	50	50																																									
2.00	75	75																																									
2.80	65	65																																									
3.08	75	75																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
<div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div><div>T1: Due to AC Input Line</div><div>T2: Due to Switching</div></div></div> <p>Fig. Complex Ripple Wave Form</p>																																											


Model	LHA100F-36		
Item	Rise and Fall Time	Temperature	25°C
Object	+36V2.8A	Testing Circuitry	Figure A

1.Graph

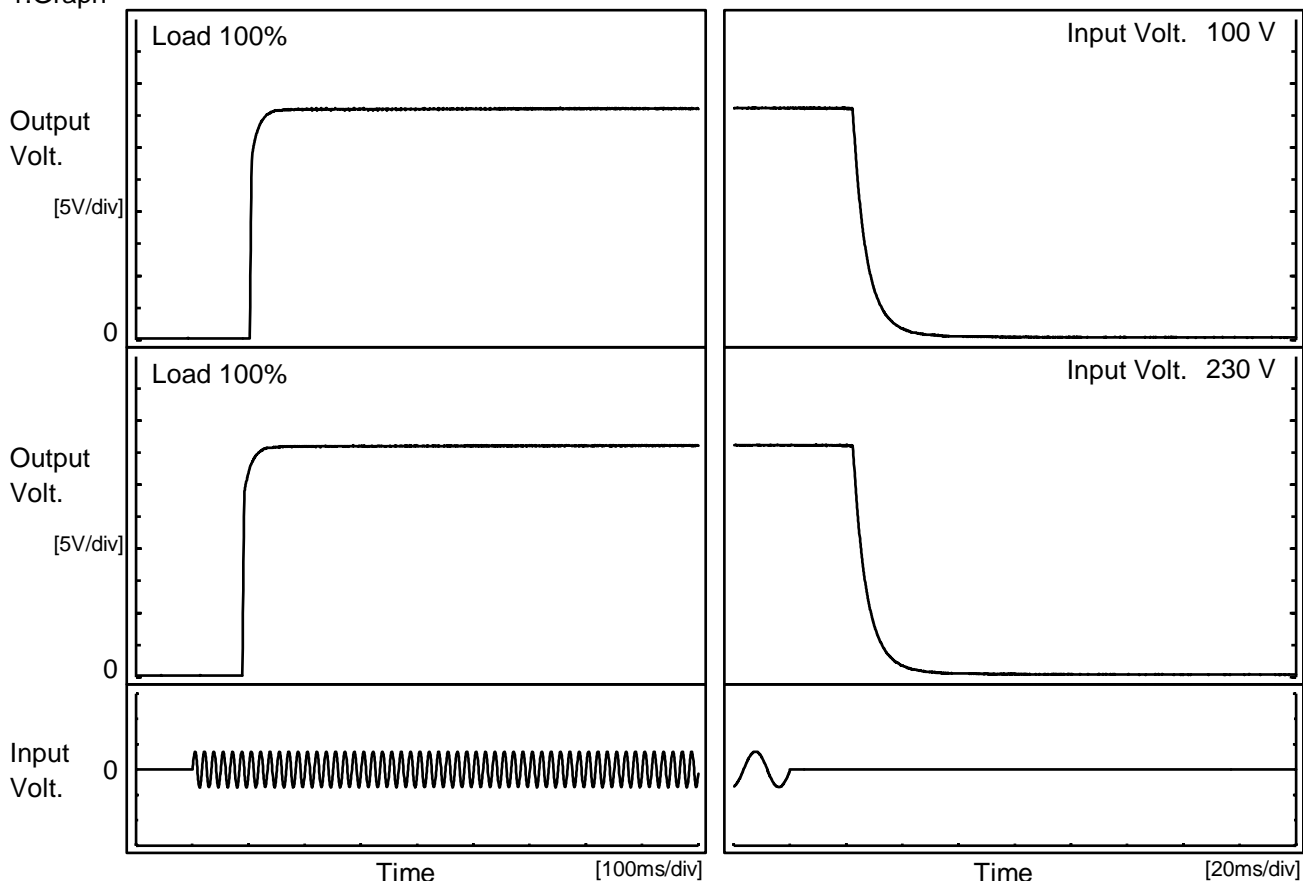

2.Values

		[ms]				
Input Volt.	Time	Td	Tr	Ts	Th	Tf
100 V		103.0	13.0	116.0	22.8	11.4
230 V		89.5	13.0	102.5	22.9	11.5

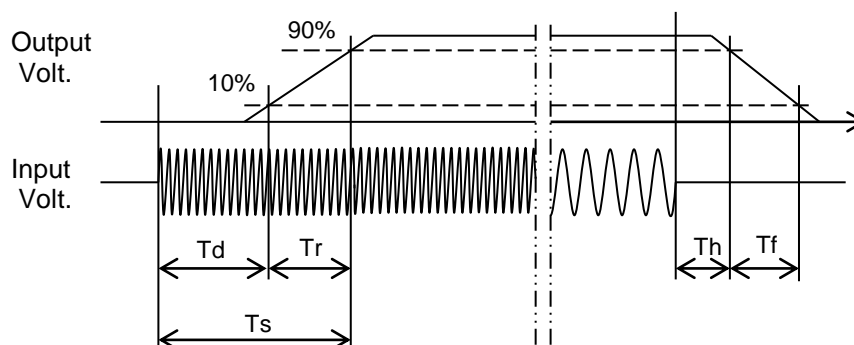

<div>LOREL</div>																																			
Model	LHA100F-36																																		
Item	Hold-Up Time	Temperature	25°C																																
Object	+36V2.8A	Testing Circuitry	Figure A																																
1.Graph		2.Values																																	
<div><div><div><div>---</div><div>□</div><div>---</div></div><div>Load 50%</div></div><div><div>—</div><div>△</div><div>—</div></div><div>Load 100%</div></div> <div>Hold-Up Time [ms]</div> <div>Input Voltage [V]</div>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Hold-Up Time [ms]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>85</td><td>44</td><td>-</td></tr><tr><td>90</td><td>44</td><td>23</td></tr><tr><td>100</td><td>44</td><td>23</td></tr><tr><td>120</td><td>44</td><td>23</td></tr><tr><td>200</td><td>45</td><td>23</td></tr><tr><td>230</td><td>45</td><td>23</td></tr><tr><td>264</td><td>45</td><td>23</td></tr><tr><td>280</td><td>47</td><td>23</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Input Voltage [V]	Hold-Up Time [ms]		Load 50%	Load 100%	85	44	-	90	44	23	100	44	23	120	44	23	200	45	23	230	45	23	264	45	23	280	47	23	--	-	-
Input Voltage [V]	Hold-Up Time [ms]																																		
	Load 50%	Load 100%																																	
85	44	-																																	
90	44	23																																	
100	44	23																																	
120	44	23																																	
200	45	23																																	
230	45	23																																	
264	45	23																																	
280	47	23																																	
--	-	-																																	
<div><div>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</div><div>Note: Slanted line shows the range of the rated input voltage.</div></div>																																			

COSEL

Model		LHA100F-36	Temperature Testing Circuitry	25°C Figure A
Item		Instantaneous Interruption Compensation		
Object		+36V2.8A		

1.Graph

—△—

Input Volt. 100V

---□---

Input Volt. 200V

-·-○-·-

Input Volt. 230V

Instantaneous Compensation Time [ms]

</

Model

LHA100F-36

Item


Minimum Input Voltage
for Regulated Output Voltage

Object

+36V2.8A

Testing Circuitry Figure A

1. Graph

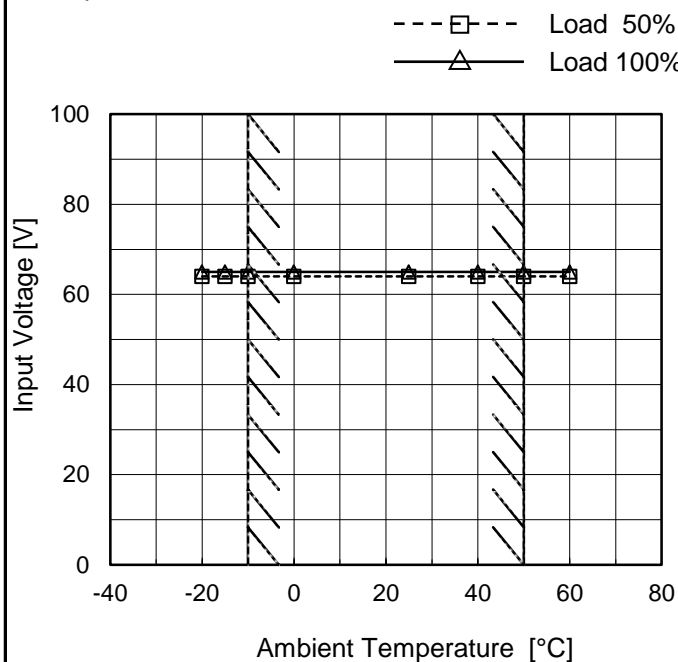

Note: Slanted line shows the range of the rated ambient temperature.

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	64	65
-15	64	65
-10	64	65
0	64	65
25	64	65
40	64	65
50	64	65
60	64	65
--	-	-
--	-	-
--	-	-

COSEL

Model		LHA100F-36	
Item		Overcurrent Protection	
Object		+36V2.8A	

1.Graph

Input Volt. 100V

Input Volt. 230V

Output Voltage [V]

<

Model		LHA100F-36
Item		Overvoltage Protection
Object		+36V2.8A

1.Graph

—△—

Input Volt. 100V

---□---

Input Volt. 230V

Ambient Temperature [°C]	Operating Point [V] (100V)	Operating Point [V] (230V)
-20	44.01	44.01
-15	44.23	44.16
-10	44.37	44.37
0	44.72	44.72
25	45.70	45.70
40	46.26	46.19
50	46.61	46.61
60	47.04	47.04
--	-	-
--	-	-
--	-	-

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 100[V]	Input Volt. 230[V]
-20	44.01	44.01
-15	44.23	44.16
-10	44.37	44.37
0	44.72	44.72
25	45.70	45.70
40	46.26	46.19
50	46.61	46.61
60	47.04	47.04
--	-	-
--	-	-
--	-	-

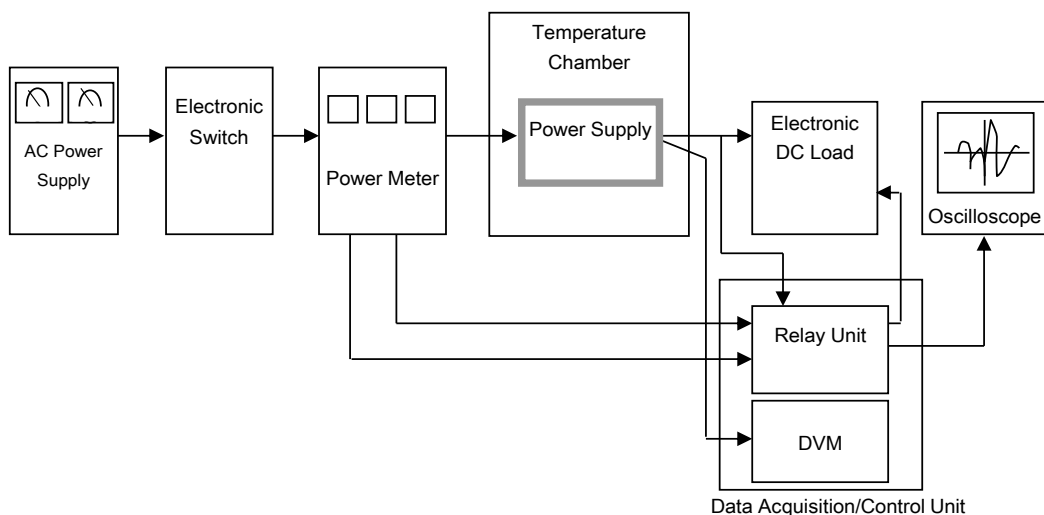


Figure A

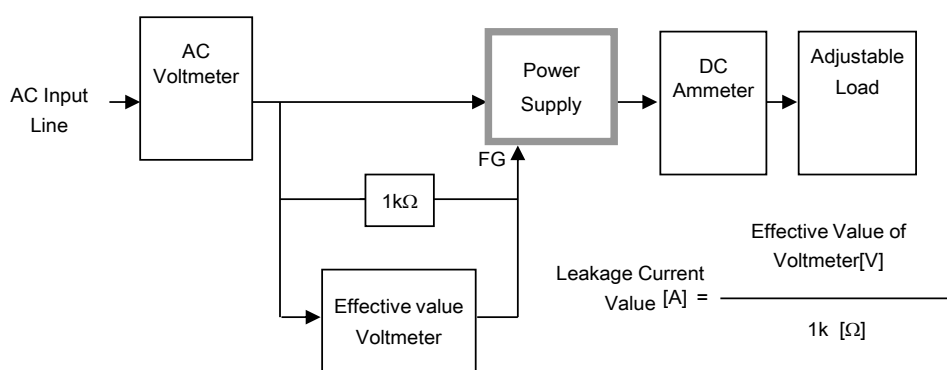


Figure B-1 (DEN-AN)

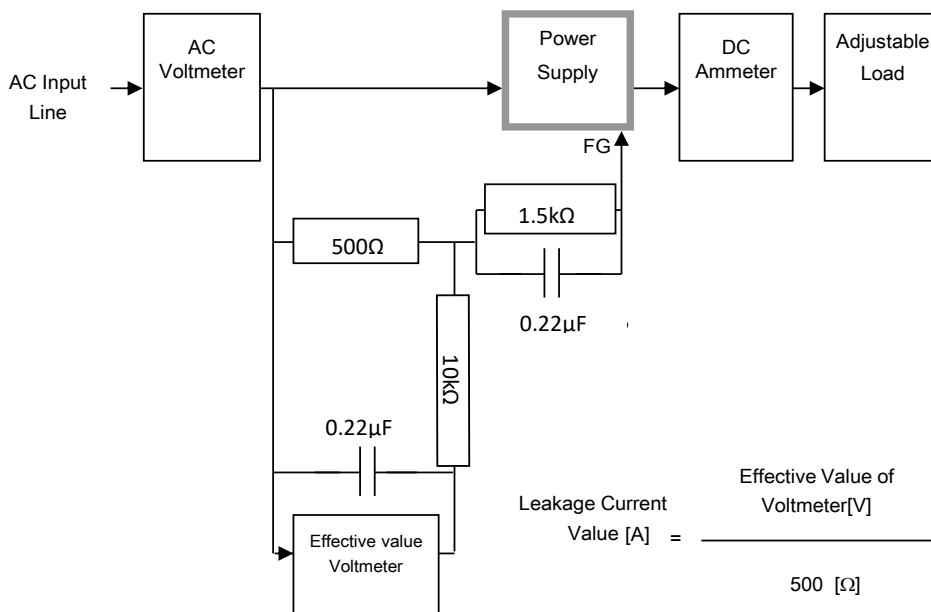


Figure B-2 (IEC62368-1 refer to IEC60990 Fig.4)

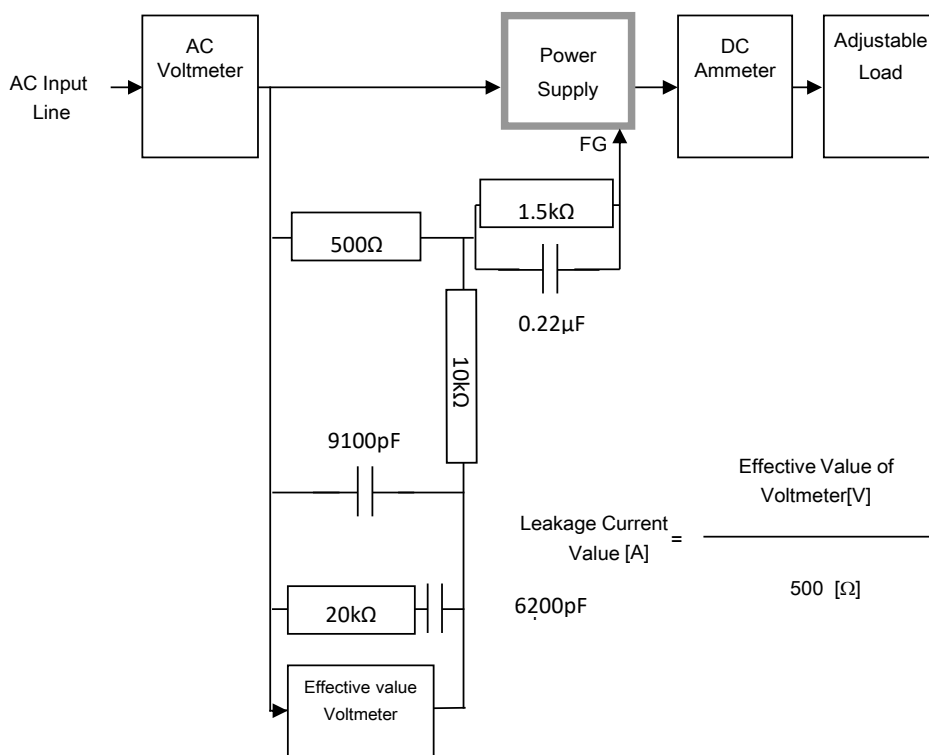


Figure B-3 (IEC62368-1 refer to IEC60990 Fig.5)

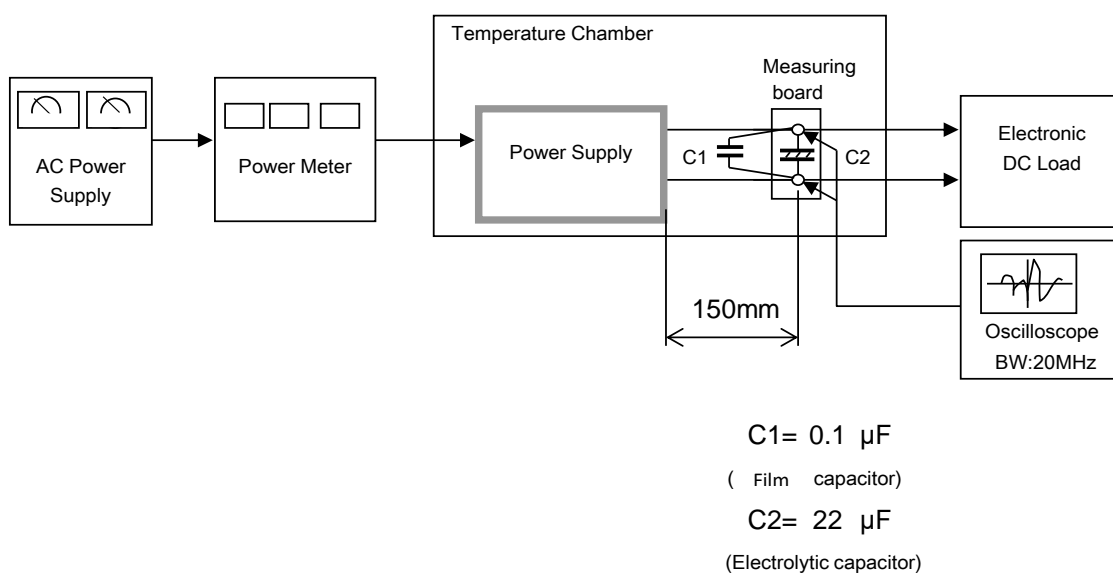


Figure C