



DATA SHEET		Date	12-Oct-21
Model	AEA1000F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	44 %RH
		Tested by	K.Nagai

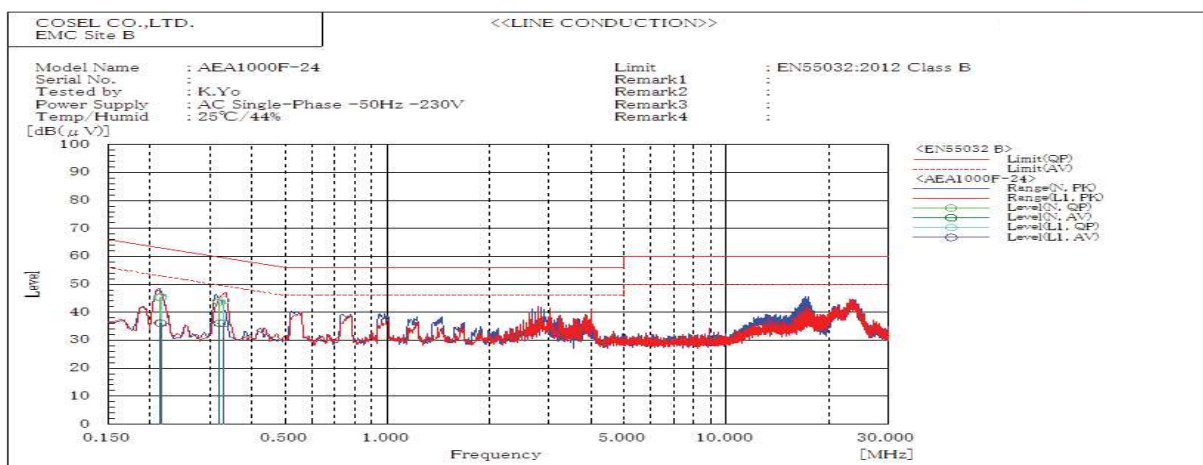


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.215	L1	45.6	36	63	53	17.4	17	Pass	
0.33	L1	44.3	36.1	59.5	49.5	15.2	13.4	Pass	
0.214	N	45.3	36.2	63	53	17.7	16.8	Pass	
0.32	N	43.7	36.1	59.7	49.7	16	13.6	Pass	

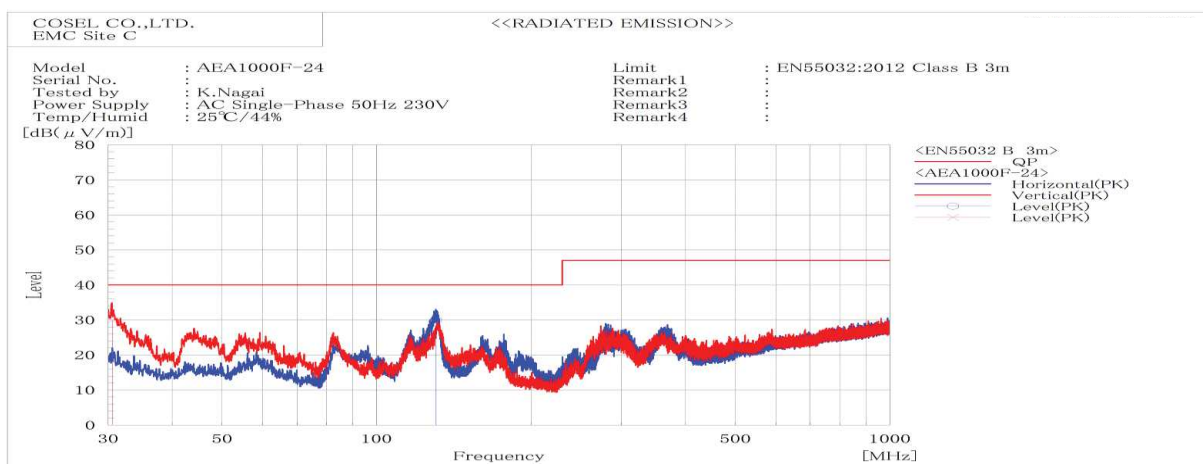


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
130.573	H	Stable	30	40	10	Pass	200	193.9	
30.577	V	Stable	29.9	40	10.1	Pass	100.2	132.8	

DATA SHEET		Date	12-Oct-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	44 %RH
		Tested by	K.Nagai

1. Line conduction

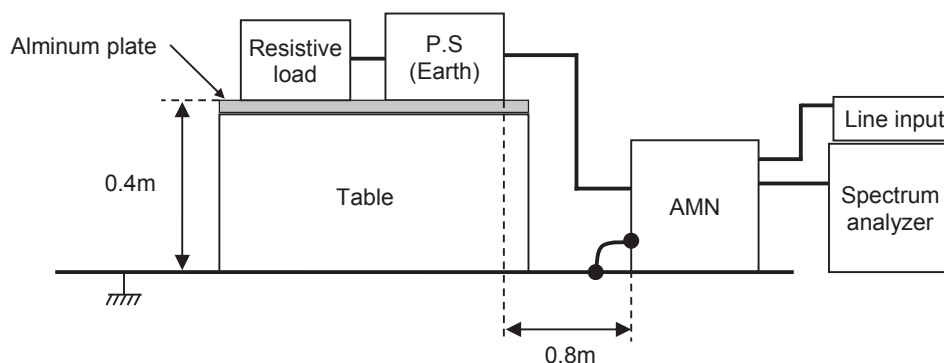

2. Radiated emission

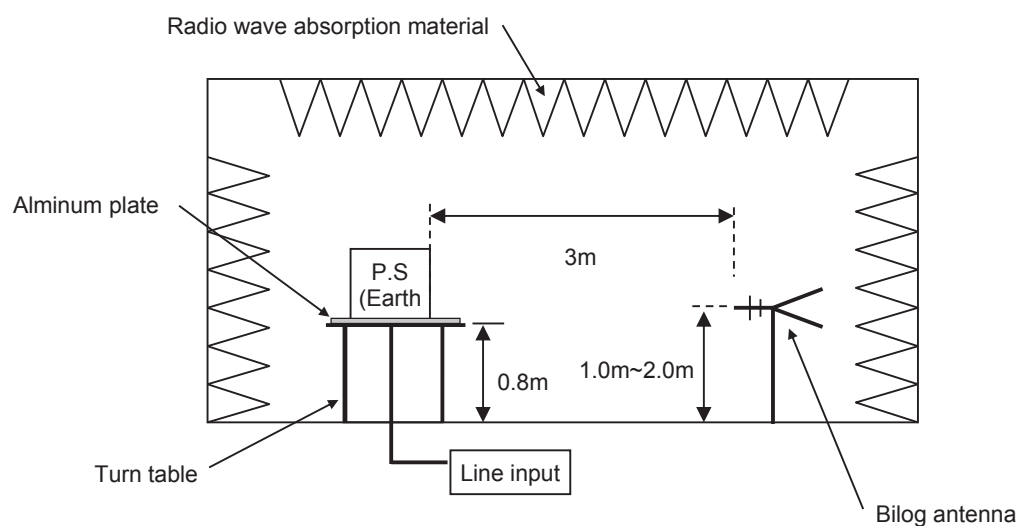


Conditions

Test : EMI
Model Name : AEA1000F

○Photographs of Test Set-Up

1.LINE CONDUCTION

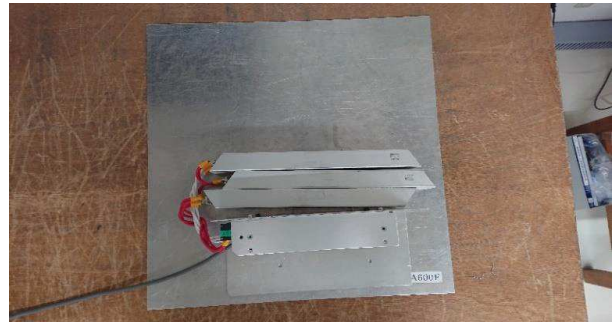

2.RADIATED EMISSION

