

TEST DATA OF TUNS50048

Regulated DC Power Supply
October 1, 2014

Approved by : Takayuki Fukuda Design Manager


Prepared by : Kosuke Takarada Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Load Current)	1
2.Input Power (by Load Current)	2
3.Efficiency (by Input Voltage)	3
4.Efficiency (by Load Current)	4
5.Power Factor (by Input Voltage)	5
6.Power Factor (by Load Current)	6
7.Inrush Current	7
8.Leakage Current	8
9.Line Regulation	9
10.Load Regulation	10
11.Dynamic Load Response	11
12.Ripple Voltage (by Load Current)	12
13.Ripple-Noise	13
14.Ripple Voltage (by Ambient Temperature)	14
15.Ambient Temperature Drift	15
16.Output Voltage Accuracy	16
17.Time Lapse Drift	17
18.Rise and Fall Time	18
19.Hold-Up Time	19
20.Instantaneous Interruption Compensation	20
21.Minimum Input Voltage for Regulated Output Voltage	21
22.Overcurrent Protection	22
23.Overvoltage Protection	23
24.Figure of Testing Circuitry	24,25

(Final Page 25)

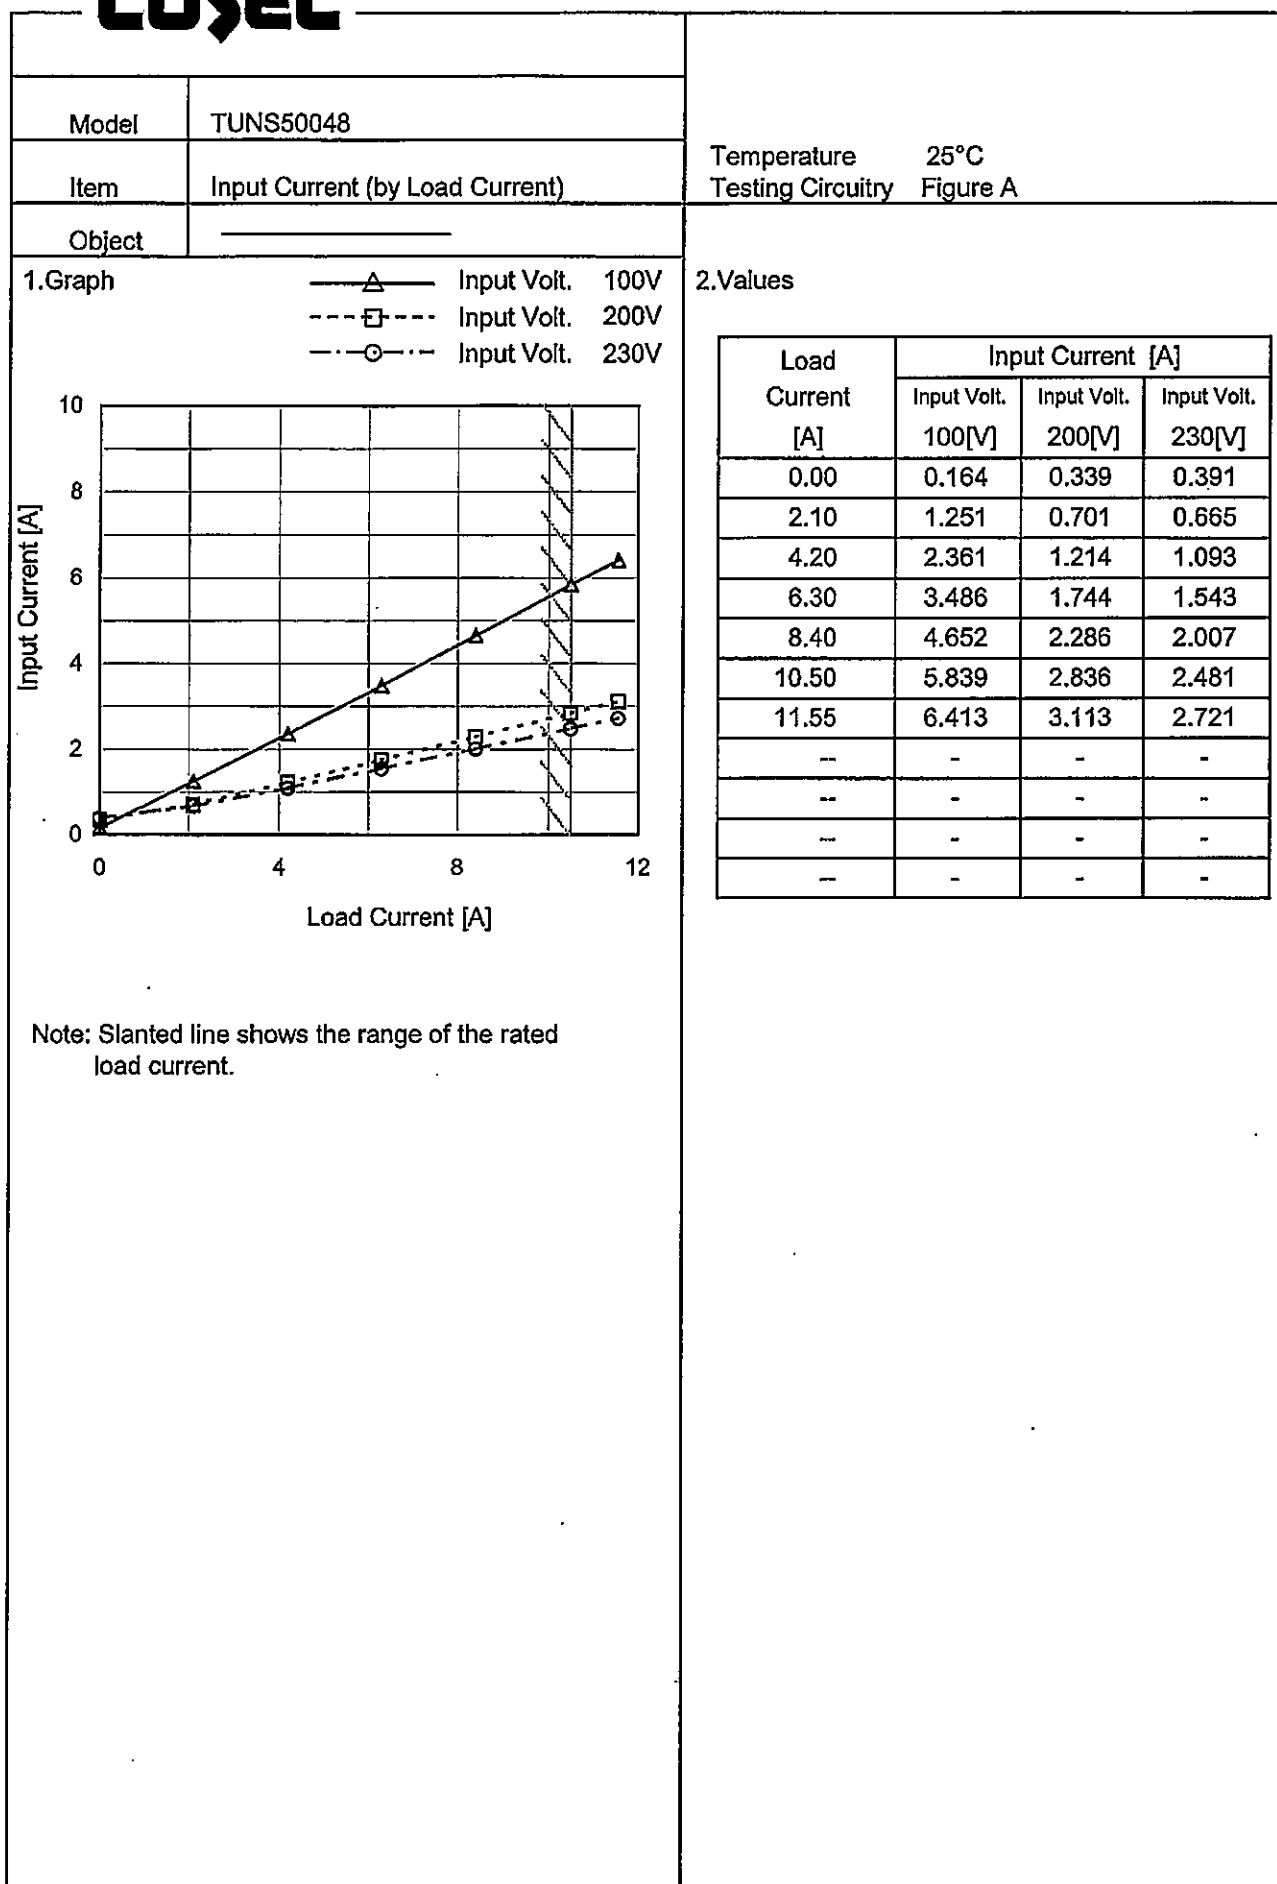

Model

TUNS50048

Item

Input Power (by Load Current)

Object

1.Graph

—△—

Input Volt.

100V

---□---

Input Volt.

200V

---○---

Input Volt.

230V

Note: Slanted line shows the range of the rated load current.

Temperature

25°C

Testing Circuitry

Figure A

2.Values

Load Current [A]	Input Power [W]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	3.4	3.2	3.2
2.10	120.1	117.2	116.6
4.20	231.1	225.9	224.8
6.30	342.3	334.7	333.1
8.40	455.0	444.4	442.5
10.50	569.6	555.1	552.6
11.55	627.0	610.6	608.0
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Model		TUNS50048	
Item		Efficiency (by Input Voltage)	
Object			
1.Graph		2.Values	

Model

TUNS50048

Item

Efficiency (by Load Current)

Object

1.Graph

—△—

Input Volt.

100V

---□---

Input Volt.

200V

---○---

Input Volt.

230V

Efficiency [%]

Load Current [A]

Note: Slanted line shows the range of the rated load current.

Temperature

25°C

Testing Circuitry

Figure A

2.Values

Load Current [A]	Efficiency [%]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	-	-	-
2.10	83.5	85.6	85.8
4.20	87.1	89.1	89.5
6.30	88.4	90.3	90.7
8.40	88.7	90.8	91.2
10.50	88.6	90.9	91.3
11.55	88.6	90.9	91.3
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

BC-10853

Model		TUNS50048	
Item		Power Factor (by Load Current)	
Object			

1.Graph

—△—

Input Volt.

100V

---□---

Input Volt.

200V

---○---

Input Volt.

230V

Power Factor

1.0

0.8

0.6

0.4

0.2

0.0

0

4

8

12




Load Current [A]

Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Power Factor		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	0.206	0.047	0.036
1.05	0.914	0.659	0.557
2.10	0.961	0.835	0.762
4.20	0.985	0.930	0.894
6.30	0.991	0.960	0.938
8.40	0.992	0.973	0.959
10.50	0.994	0.980	0.969
11.55	0.994	0.983	0.973
--	-	-	-
--	-	-	-
--	-	-	-

Model	TUNS50048	Temperature	25°C
Item	Inrush Current	Testing Circuitry	Figure A
Object			

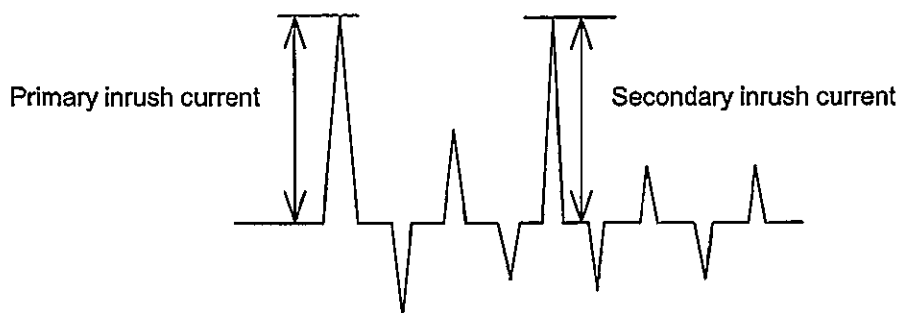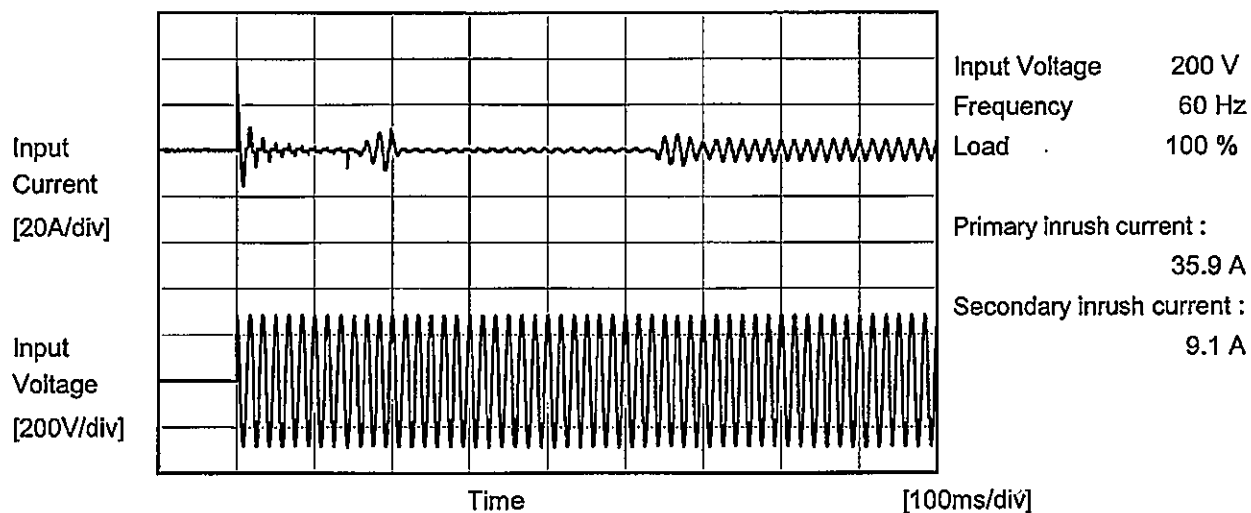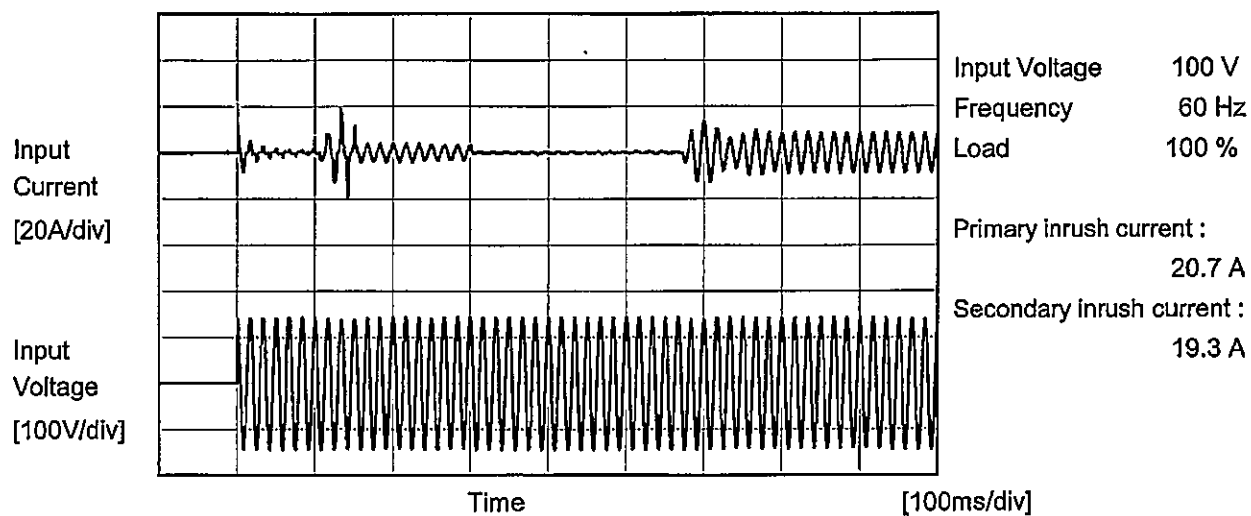



		Temperature 25°C Testing Circuitry Figure B
Model	TUNS50048	
Item	Leakage Current	
Object		

1.Results

[mA]

Standards		Input Volt.			Note
		100 [V]	200 [V]	240[V]	
IEC60950-1	Both phases	0.16	0.33	0.40	Operation
	One of phase	0.30	0.63	0.77	stand by

The value for "One phase" is the reference value only.

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

Model		TUNS50048	
Item		Line Regulation	
Object		+48V10.5A	
1.Graph		2.Values	

---□---

Load 50%

—△—

Load 100%

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
80	48.102	48.105
85	48.104	48.108
100	48.105	48.109
120	48.105	48.109
200	48.104	48.108
230	48.104	48.108
264	48.105	48.109
280	48.105	48.109
--	-	-

Note: Slanted line shows the range of the rated input voltage.

Model		TUNS50048	
Item		Load Regulation	
Object		+48V10.5A	

1.Graph

—△—

Input Volt.

100V

---□---

Input Volt.

200V

---○---

Input Volt.

230V

Output Voltage [V]

Load Current [A]

Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Output Voltage [V]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	48.116	48.115	48.116
2.10	48.110	48.110	48.110
4.20	48.110	48.109	48.109
6.30	48.110	48.109	48.109
8.40	48.109	48.109	48.109
10.50	48.109	48.108	48.108
11.55	48.110	48.109	48.109
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-


BC-10853



Model	TUNS500F48
Item	Dynamic Load Response
Object	+48V 10.5A


Temperature 25°C
Testing Circuitry Figure A

Input Volt. 100V
Cycle 1000ms


Load Current  10.5A / 50us

Min.Load (0A) ←→
Load 100%(10.5A)

1 V/div

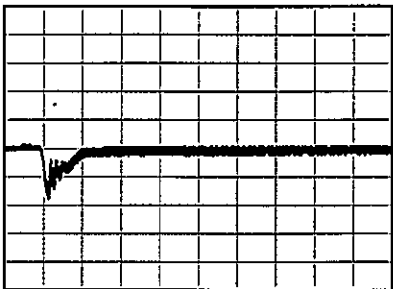


400 us/div

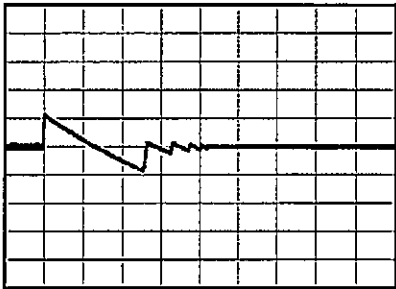


20 ms/div

Min.Load (0A) ←→
Load 50%(5.25A)

1 V/div

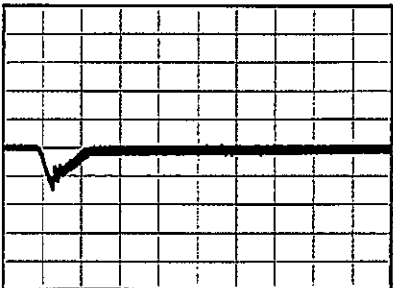


400 us/div

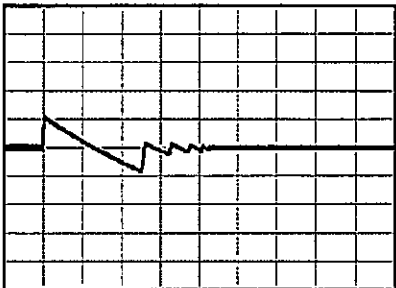


20 ms/div

Load 10% (1.05A) ←→
Load 100% (10.5A)

1 V/div

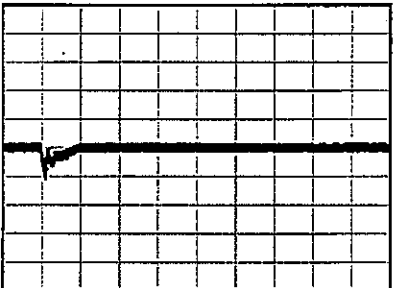

400 us/div

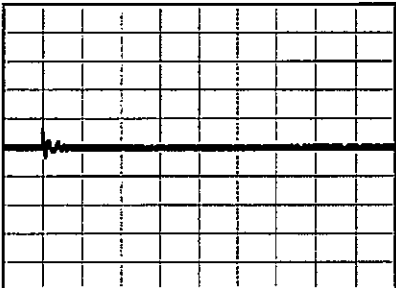

20 ms/div

Model		TUNS500F48	
Item		Ripple Voltage (by Load Current)	
Object		+48V10.5A	
1.Graph		2.Values	


—△— Input Volt. 100V
- - -○- - - Input Volt. 200V

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 100 [V]	Input Volt. 200 [V]
0.0	85	85
2.1	165	165
4.2	175	175
6.3	175	175
8.4	175	175
10.5	175	175
11.6	175	175
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.
Ripple Voltage is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.


T1: Due to AC Input Line
T2: Due to Switching

Fig. Complex Ripple Wave Form

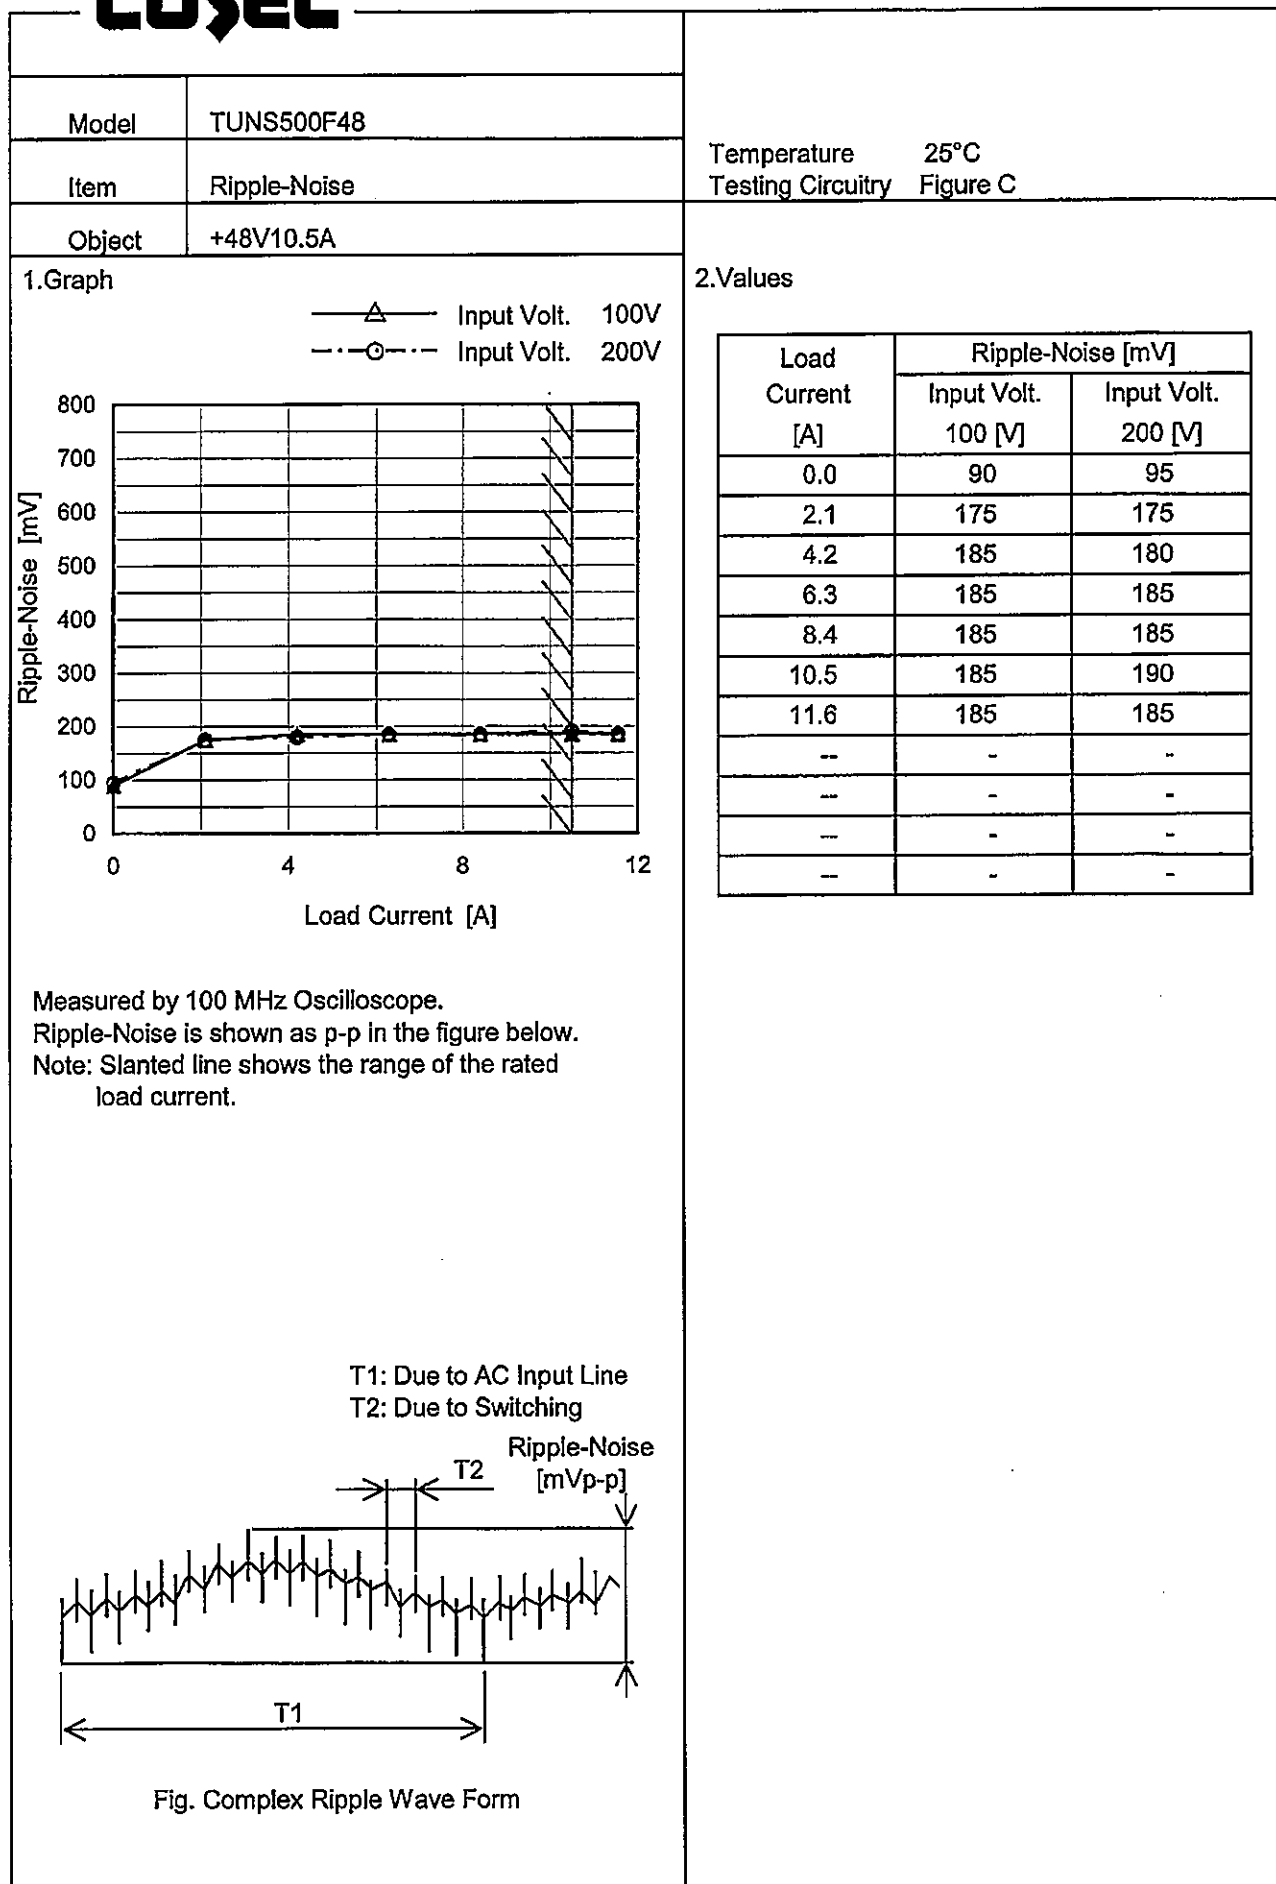

Testing Circuitry Figure C

2.Values

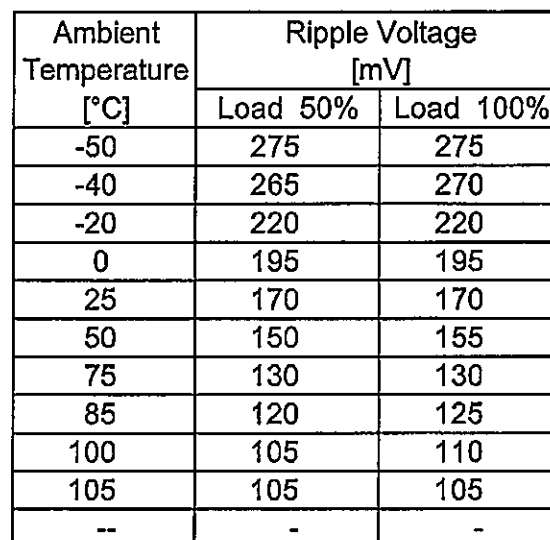

Note: Slanted line shows the range of the rated ambient temperature.

LOREL

Model TUNS50048

Item Ambient Temperature Drift

Object +48V10.5A

Testing Circuitry Figure A

1.Graph

—△— Input Volt. 100V
 ---□--- Input Volt. 200V
 ---○--- Input Volt. 230V

The graph plots Output Voltage [V] on the y-axis (ranging from 47.40 to 48.60) against Ambient Temperature [°C] on the x-axis (ranging from -60 to 120). Three data series are shown for input voltages of 100V (triangles), 200V (squares), and 230V (circles). All three series show a similar upward trend, with output voltage increasing as ambient temperature increases. A slanted line is drawn through the data points, representing the range of the rated ambient temperature. The data points for the 200V input voltage are as follows:

Ambient Temperature [°C]	Output Voltage [V] (200V Input)
-50	47.834
-40	47.884
-20	47.973
0	48.051
25	48.109
50	48.152
75	48.177
85	48.187
100	48.212
105	48.227

Ambient Temperature [°C]

Load 100%

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
-50	47.834	47.836	47.837
-40	47.884	47.885	47.885
-20	47.973	47.974	47.974
0	48.051	48.052	48.053
25	48.109	48.108	48.108
50	48.152	48.152	48.153
75	48.177	48.178	48.178
85	48.187	48.187	48.188
100	48.212	48.214	48.214
105	48.227	48.229	48.229
—	—	—	—

Model		TUNS50048	Testing Circuitry Figure A
Item		Output Voltage Accuracy	
Object		+48V10.5A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 100°C

Input Voltage : 85 - 264V

Load Current : 0 - 10.5A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$


* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	100	85	0	48.221	±170	±0.4
Minimum Voltage	-40	85	10.5	47.881		


Model	TUNS50048	Temperature	25°C
Item	Rise and Fall Time	Testing Circuitry	Figure A
Object	+48V10.5A		

1. Graph

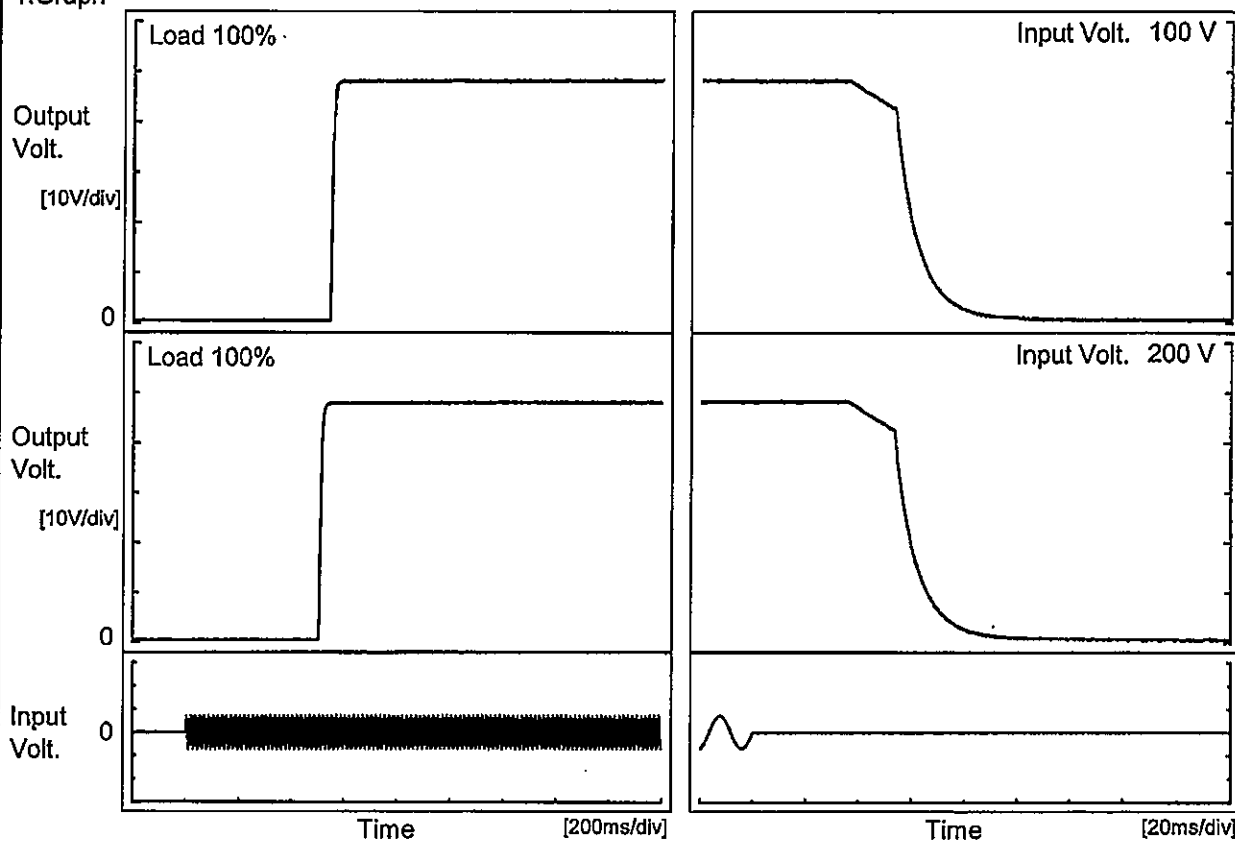

2. Values

Input Volt. \ Time	Td	Tr	Ts	Th	Tf
100 V	547.0	15.0	562.0	50.2	22.4
200 V	506.0	14.0	520.0	50.5	22.1

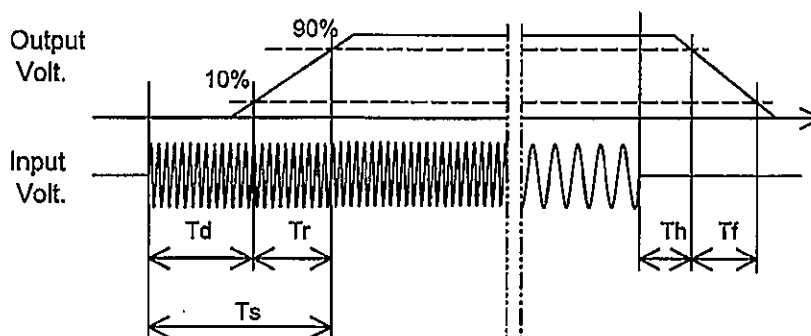

Model		TUNS50048	
Item		Hold-Up Time	
Object		+48V10.5A	

1.Graph

□

Load 50%

△

Load 100%

Hold-Up Time [ms]

1000

100

10

1

50

100

150

200

250

300

Input Voltage [V]

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated input voltage.

2.Values

Input Voltage. [V]	Hold-Up Time [ms]	
	Load 50%	Load 100%
80	85	40
85	85	40
100	85	41
120	85	41
200	85	41
230	85	40
264	85	41
280	85	41
--	-	-

Model

TUNS50048

Item

Instantaneous Interruption Compensation

Object

+48V10.5A

1.Graph

—△—

Input Volt.

100V

---□---

Input Volt.

200V

---○---

Input Volt.

230V

Instantaneous Compensation Time [ms]

1000

100

10

1

0

4

8

12

Load Current [A]

Note: Slanted line shows the range of the rated load current.

Temperature

25°C

Testing Circuitry

Figure A


2.Values

Load Current [A]	Time [ms]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	-	-	-
2.10	198	198	198
4.20	98	98	98
6.30	64	64	64
8.40	47	48	48
10.50	37	37	37
11.55	31	31	31
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Model	TUNS50048
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+48V10.5A

Testing Circuitry Figure A

1.Graph

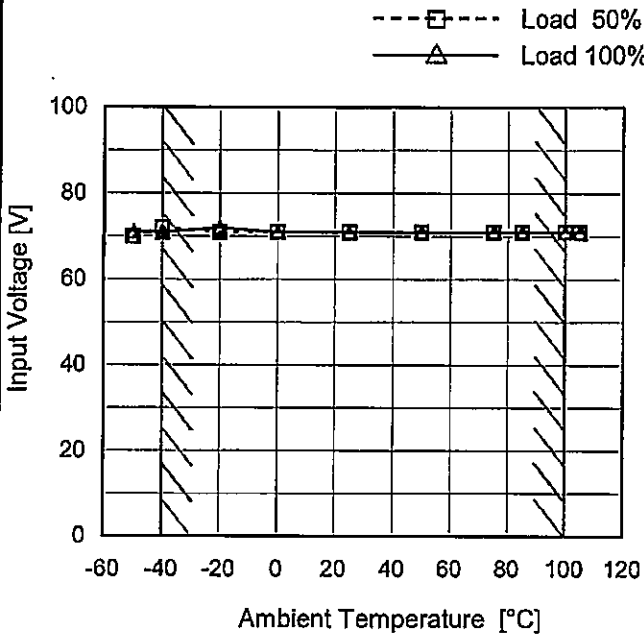

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-50	70	71
-40	72	71
-20	71	72
0	71	71
25	71	71
50	71	71
75	71	71
85	71	71
100	71	71
105	71	71
--	-	-

Model		TUNS50048	
Item		Overcurrent Protection	
Object		+48V10.5A	

1.Graph

Input Volt. 100V

Input Volt. 230V

Output Voltage [V]

Model

TUNS50048

Item

Overvoltage Protection

Object

+48V10.5A

1.Graph

—△—

Input Volt. 100V

---□---

Input Volt. 200V

Operating Point [V]

Ambient Temperature [°C]

Load 0%

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 100[V]	Input Volt. 200[V]
-50	57.01	56.96
-40	57.01	57.07
-20	57.19	57.19
0	57.25	57.25
25	57.31	57.31
50	57.31	57.31
75	57.30	57.30
85	57.30	57.30
100	57.18	57.30
105	57.24	57.19
--	-	-

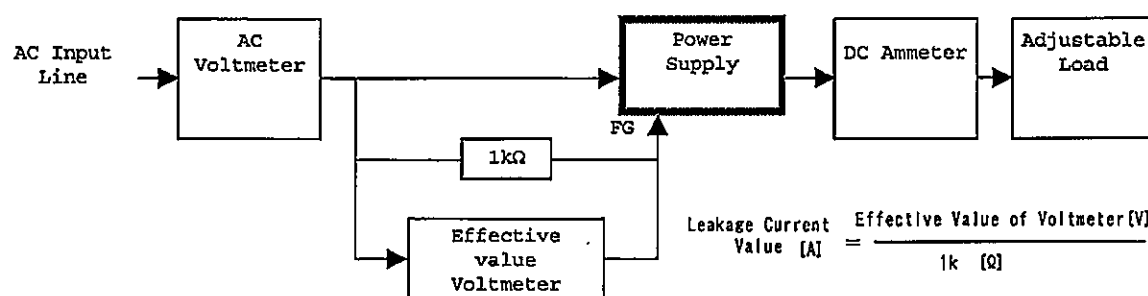
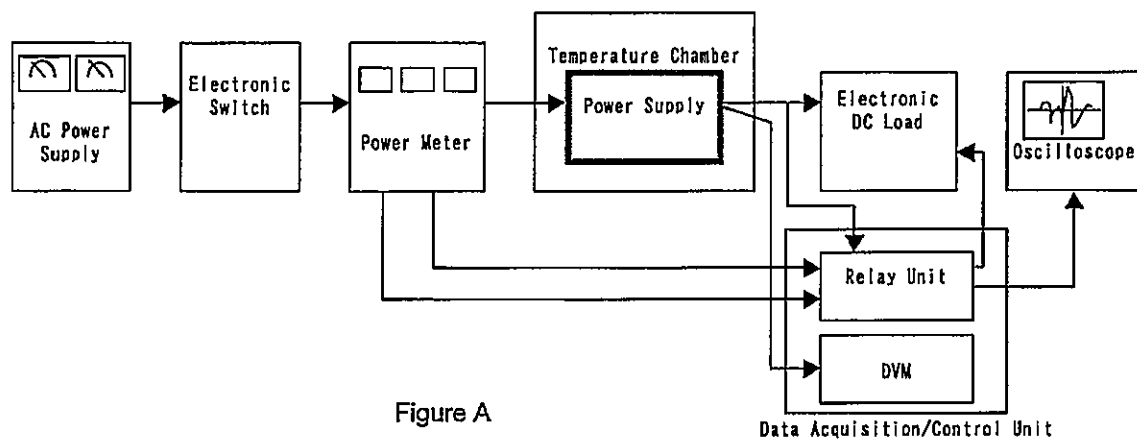


Figure B (DEN-AN)


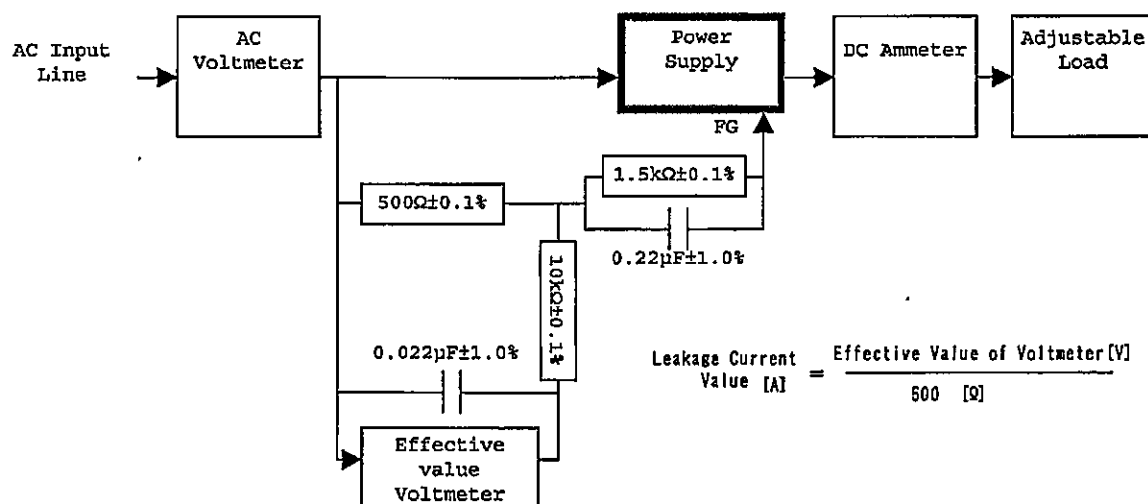



Figure B (IEC60950-1)

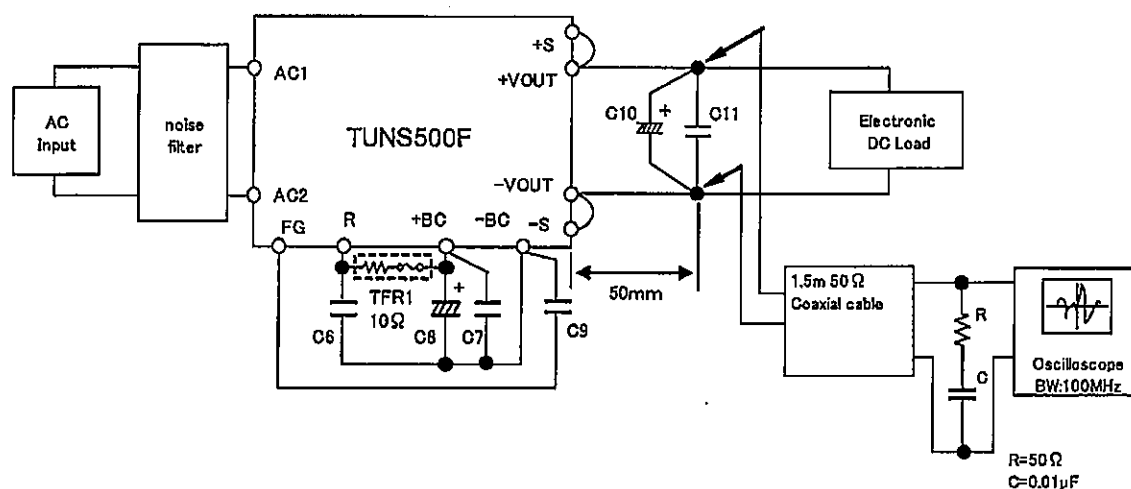

C10	: TUNS500F12	2200 μ F	($0 \leq T_c \leq 100$)	C11	: TUNS500F12	10 μ F
		2200 μ F \times 3	($-40 \leq T_c < 0$)		TUNS500F28	4.7 μ F
	TUNS500F28	1000 μ F	($0 \leq T_c \leq 100$)		TUNS500F48	2.2 μ F
		1000 μ F \times 3	($-40 \leq T_c < 0$)			
	TUNS500F48	470 μ F	($0 \leq T_c \leq 100$)			
		470 μ F \times 3	($-40 \leq T_c < 0$)			

T_c: Base Plate Temp.

Figure C

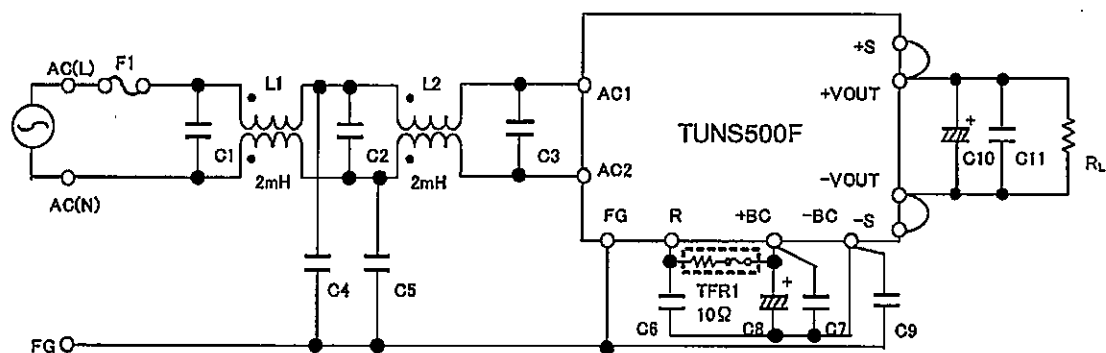

L1, L2	: SC-15-200(NEC TOKIN)	C11	: TUNS500F12	10 μ F Ceramic Capacitor
C1, C2	: 0.68 μ F 310V Film Capacitor \times 2		TUNS500F28	4.7 μ F Ceramic Capacitor
C3	: 1.0 μ F 310V Film Capacitor \times 2		TUNS500F48	2.2 μ F Ceramic Capacitor
C4, C5, C9	: 2200pF Ceramic Capacitor			
C6, C7	: 0.68 μ F 450V Film Capacitor \times 2			
C8	: 390 μ F 450V Electrolytic Capacitor \times 2			
C10	: TUNS500F12	2200 μ F	25V Electrolytic Capacitor	
	TUNS500F28	1000 μ F	50V Electrolytic Capacitor	
	TUNS500F48	470 μ F	63V Electrolytic Capacitor	

Figure D