



TEST DATA OF ZUS1R50512

(5.0V INPUT)

Regulated DC Power Supply

Date : June 14. 1996

Approved by : T. Sugimori
Design Manager

Prepared by : K. Shimano
Design Engineer


コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	5
リップルノイズ	
6. Overcurrent Protection	6
過電流保護	
7. Dynamic Load Responce	7
動的負荷変動	
8. Rise and Fall Time	8
立上り、立下がり時間	
9. Ambient Temperature Drift	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	12
経時ドリフト	
13. Output Voltage Accuracy	13
定電圧精度	
14. Condensation	14
結露特性	
15. Figure of Testing Circuitry	15
測定回路図	

(Final Page 15)

COSEL

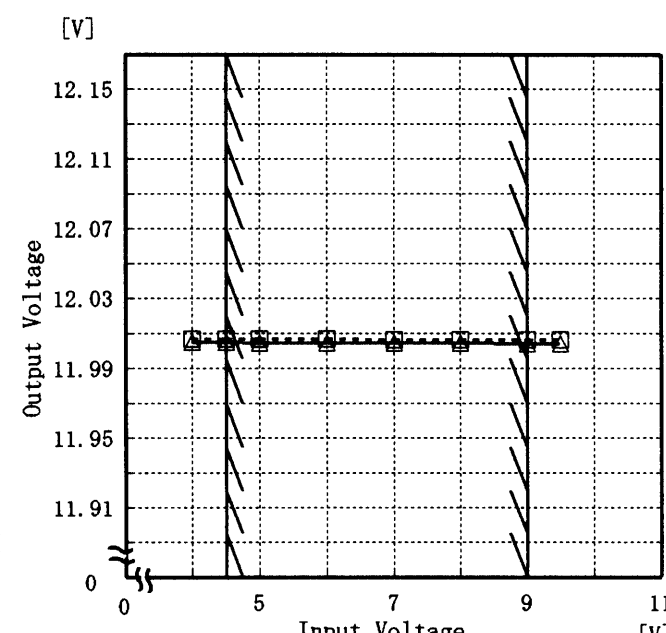Model		ZUS1R50512	Temperature		25℃																																									
Item		Line Regulation 静的入力変動	Testing Circuitry		Figure A																																									
Object		+12V0.13A																																												
1. Graph			2. Values																																											
<div>-----□----- Load 50%</div> <div>-----△----- Load 100%</div> <div>[V]</div> <div><div>Output Voltage</div><div><div>12.15</div><div>12.11</div><div>12.07</div><div>12.03</div><div>11.99</div><div>11.95</div><div>11.91</div><div>0</div></div></div> <div><div>0</div><div>5</div><div>7</div><div>9</div><div>11</div></div> <div><div>Input Voltage</div><div>[V]</div></div>  <div>Note: Slanted line shows the range of the rated input voltage.</div> <div>(注)斜線は定格入力電圧範囲を示す。</div>			<table><tr><th rowspan="2">Input Voltage [V]</th><th>Load 50%</th><th>Load 100%</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>4.0</td><td>12.007</td><td>12.005</td></tr><tr><td>4.5</td><td>12.007</td><td>12.005</td></tr><tr><td>5.0</td><td>12.006</td><td>12.005</td></tr><tr><td>6.0</td><td>12.006</td><td>12.004</td></tr><tr><td>7.0</td><td>12.006</td><td>12.004</td></tr><tr><td>8.0</td><td>12.006</td><td>12.004</td></tr><tr><td>9.0</td><td>12.006</td><td>12.004</td></tr><tr><td>9.5</td><td>12.006</td><td>12.004</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>			Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	4.0	12.007	12.005	4.5	12.007	12.005	5.0	12.006	12.005	6.0	12.006	12.004	7.0	12.006	12.004	8.0	12.006	12.004	9.0	12.006	12.004	9.5	12.006	12.004	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50%	Load 100%																																												
	Output Volt. [V]	Output Volt. [V]																																												
4.0	12.007	12.005																																												
4.5	12.007	12.005																																												
5.0	12.006	12.005																																												
6.0	12.006	12.004																																												
7.0	12.006	12.004																																												
8.0	12.006	12.004																																												
9.0	12.006	12.004																																												
9.5	12.006	12.004																																												
—	—	—																																												
—	—	—																																												
—	—	—																																												
—	—	—																																												

COSEL

Model

ZUS1R50512

Item

Efficiency 効率

Temperature


25°C

Testing Circuitry

Figure A

Object

1. Graph

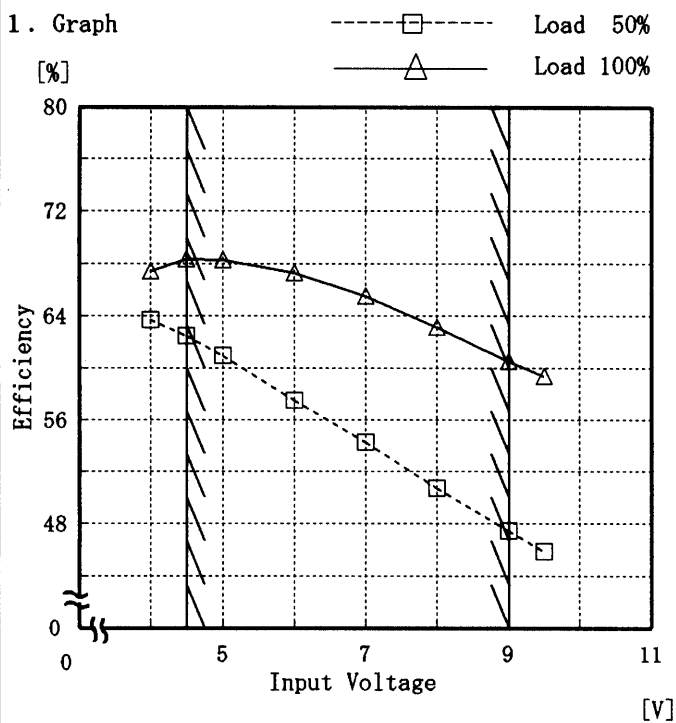

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
4.0	63.7	67.4
4.5	62.5	68.3
5.0	61.0	68.3
6.0	57.5	67.3
7.0	54.3	65.5
8.0	50.8	63.2
9.0	47.4	60.6
9.5	45.8	59.4
—	—	—
—	—	—
—	—	—
—	—	—

COSEL

Model		ZUS1R50512		Temperature		25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+12V0.13A																																																				
1. Graph				2. Values																																																		
<div><div><div>△</div><div>Input Volt. 4.5V</div></div><div><div>□</div><div>Input Volt. 5.0V</div></div><div><div>○</div><div>Input Volt. 9.0V</div></div></div> <div><div><div>[V]</div><div>12.15</div><div>12.11</div><div>12.07</div><div>12.03</div><div>11.99</div><div>11.95</div><div>11.91</div><div>0</div></div><div>Output Voltage</div></div> <div><div><div>0</div><div>0.05</div><div>0.1</div><div>0.15</div><div>0.2</div></div><div>Load Current</div><div>[A]</div></div> <div>Note: Slanted line shows the range of the rated load current.</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>				<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.00</td><td>12.006</td><td>12.006</td><td>12.006</td></tr><tr><td>0.02</td><td>12.006</td><td>12.006</td><td>12.006</td></tr><tr><td>0.04</td><td>12.005</td><td>12.006</td><td>12.006</td></tr><tr><td>0.06</td><td>12.005</td><td>12.005</td><td>12.005</td></tr><tr><td>0.08</td><td>12.005</td><td>12.005</td><td>12.005</td></tr><tr><td>0.10</td><td>12.005</td><td>12.005</td><td>12.005</td></tr><tr><td>0.12</td><td>12.004</td><td>12.005</td><td>12.004</td></tr><tr><td>0.13</td><td>12.004</td><td>12.004</td><td>12.004</td></tr><tr><td>0.14</td><td>12.004</td><td>12.004</td><td>12.004</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	12.006	12.006	12.006	0.02	12.006	12.006	12.006	0.04	12.005	12.006	12.006	0.06	12.005	12.005	12.005	0.08	12.005	12.005	12.005	0.10	12.005	12.005	12.005	0.12	12.004	12.005	12.004	0.13	12.004	12.004	12.004	0.14	12.004	12.004	12.004	—	—	—	—
Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]																																																			
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																			
0.00	12.006	12.006	12.006																																																			
0.02	12.006	12.006	12.006																																																			
0.04	12.005	12.006	12.006																																																			
0.06	12.005	12.005	12.005																																																			
0.08	12.005	12.005	12.005																																																			
0.10	12.005	12.005	12.005																																																			
0.12	12.004	12.005	12.004																																																			
0.13	12.004	12.004	12.004																																																			
0.14	12.004	12.004	12.004																																																			
—	—	—	—																																																			

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSEL

LOVEL

Model	ZUS1R50512
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)
Object	+12V 0.13A

1. Graph

-----□-----

Input Volt. 4.5V

———△———

Input Volt. 9.0V

[mV]

40

30

20

10

0

0

0.05

0.1

0.15

Load Current

[A]

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

→

←

T2

Ripple [mVp-p]

←

→

T1

Fig. Complex Ripple Wave Form
図 リップル波形詳細図

Temperature

25℃

Testing Circuitry

Figure A

2.Values

Load Current [A]	Input Volt. 4.5 [V]	Input Volt. 9.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	5	5
0.02	5	5
0.04	5	5
0.06	5	5
0.08	5	5
0.10	8	5
0.12	10	5
0.13	10	5
0.14	10	5
—	—	—
—	—	—

COSEL

Model		ZUS1R50512	
Item		Ripple-Noise リップルノイズ	
Object		+12V0.13A	

1. Graph

-----□-----

Input Volt. 4.5V

-----△-----

Input Volt. 9.0V

[mV]

80

60

40

20

0

Ripple-Noise

0

0.05

0.1

0.15

Load Current

[A]

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line

入力商用周期

T2: Due to Switching

スイッチング*周期

T2

Ripple-Noise

[mVp-p]

T1

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

2. Values

Load current	Input Volt.	Input Volt.
	4.5 [V]	9.0 [V]
	Ripple-Noise	Ripple-Noise
[A]	[mV]	[mV]
0.00	8	15
0.02	10	18
0.04	10	18
0.06	10	18
0.08	15	18
0.10	15	18
0.12	20	18
0.13	20	18
0.14	20	18
—	—	—
—	—	—

COSEL


Model ZUS1R50512

Item Overcurrent Protection
過電流保護

Object +12V 0.13A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

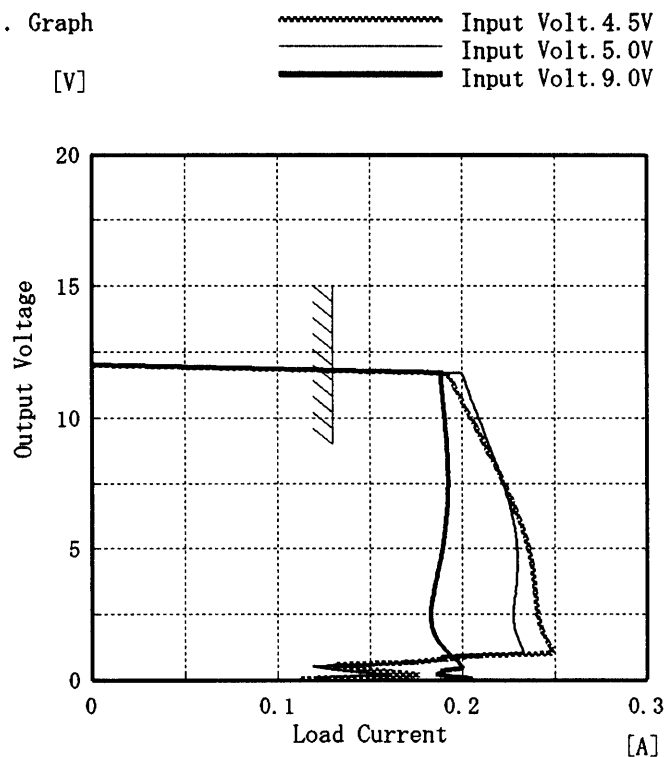


Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

2. Values

Output Voltage [V]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
12.00	0.19	0.20	0.19
11.40	0.19	0.20	0.19
10.80	0.20	0.20	0.19
9.60	0.21	0.21	0.19
8.40	0.22	0.22	0.19
7.20	0.22	0.22	0.19
6.00	0.23	0.23	0.19
4.80	0.24	0.23	0.19
3.60	0.24	0.23	0.19
2.40	0.24	0.23	0.18
1.20	0.25	0.23	0.19
0.00	0.11	0.13	0.21

COSEL

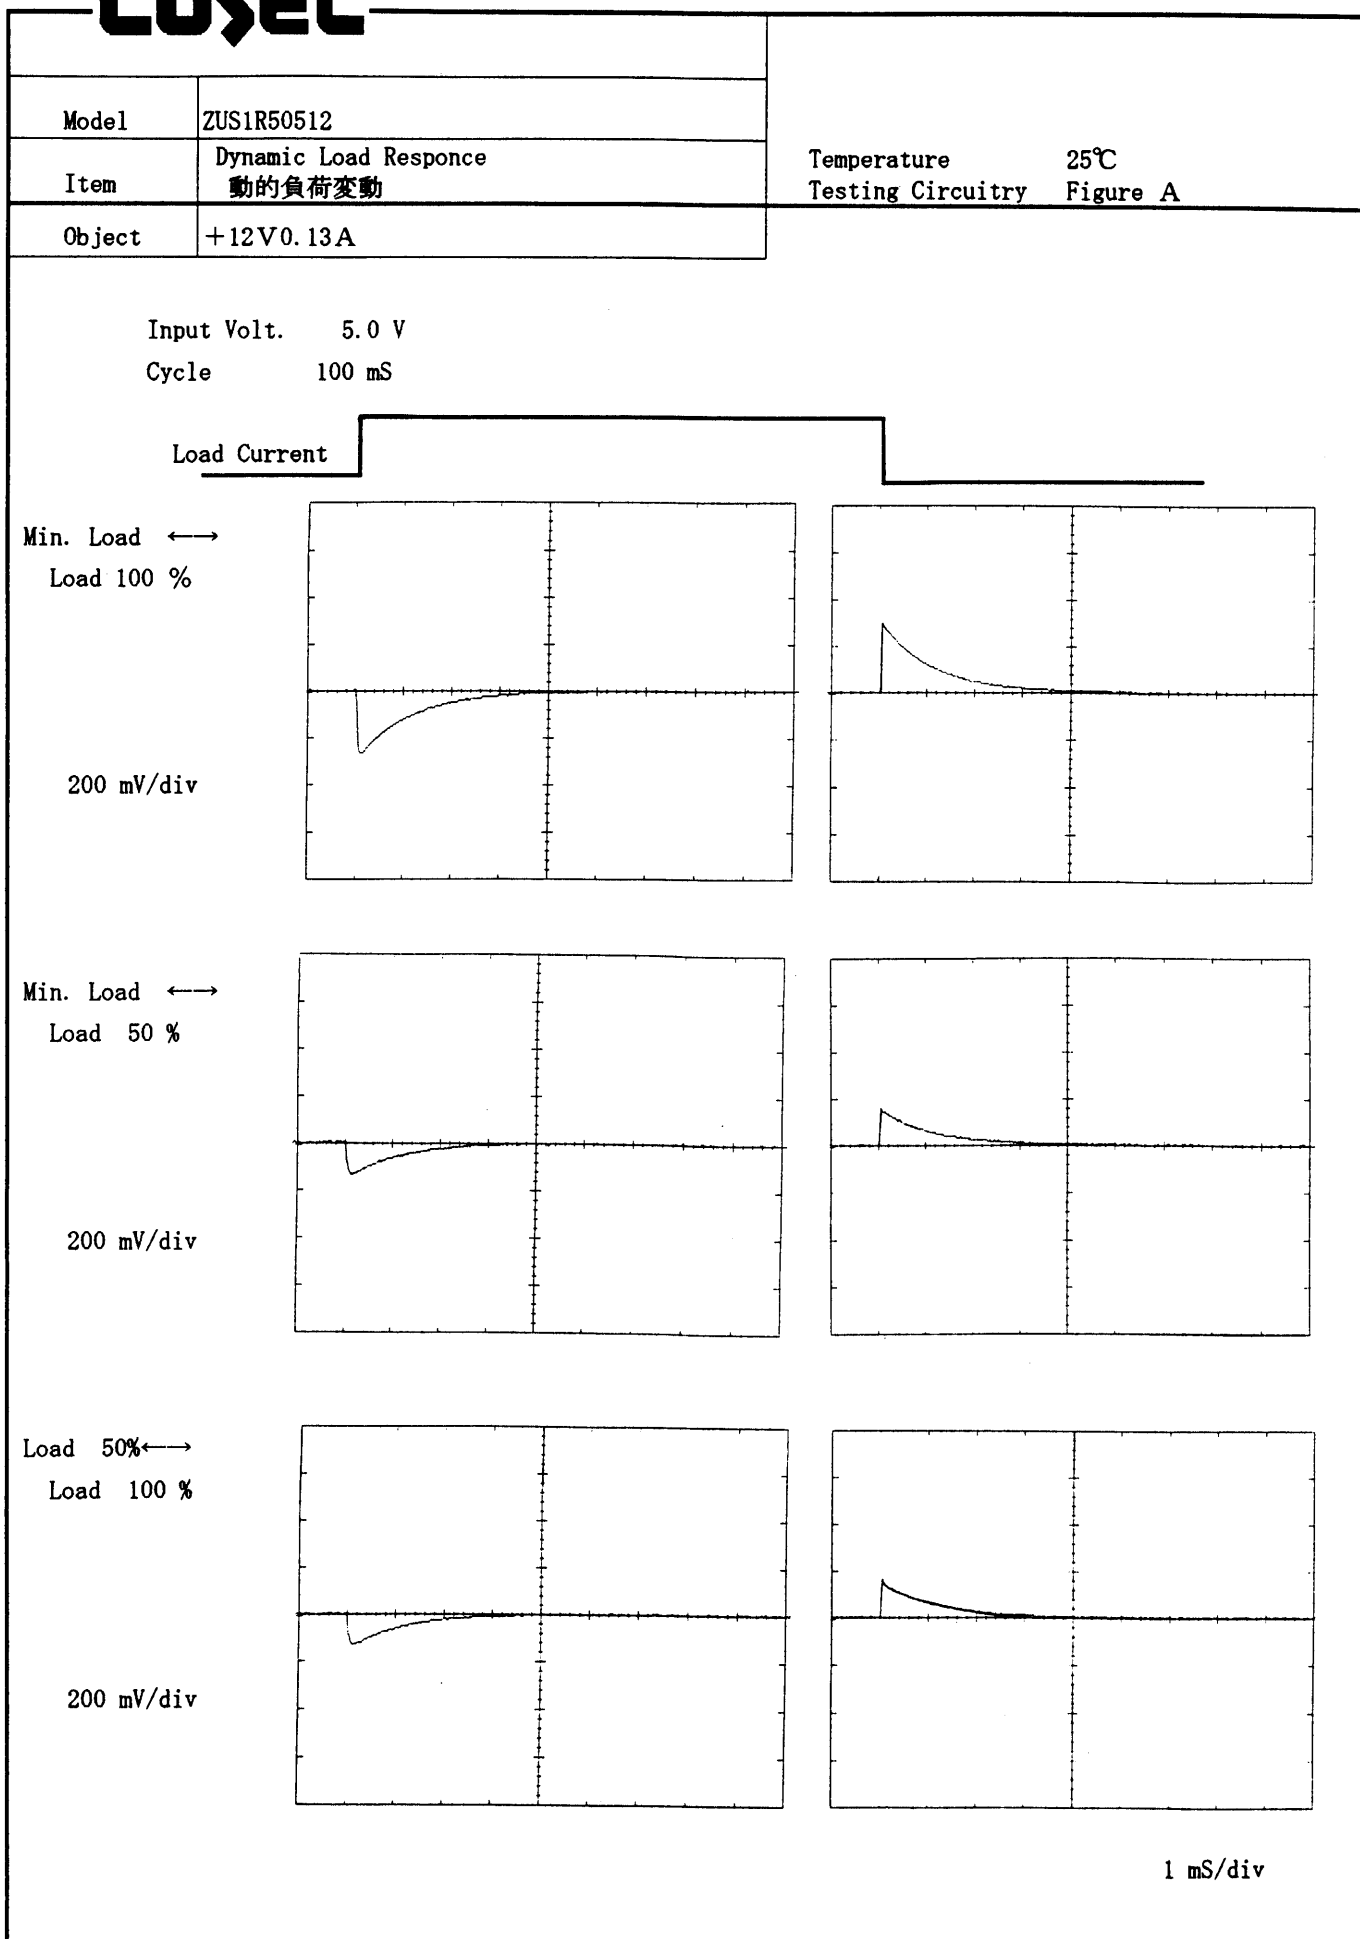

COSEL

Model ZUS1R50512


Item Rise and Fall Time 立上り、立下り時間

Temperature 25°C
Testing Circuitry Figure A

Object +12V0.13A

1. Graph


Input Volt. 4.5 V

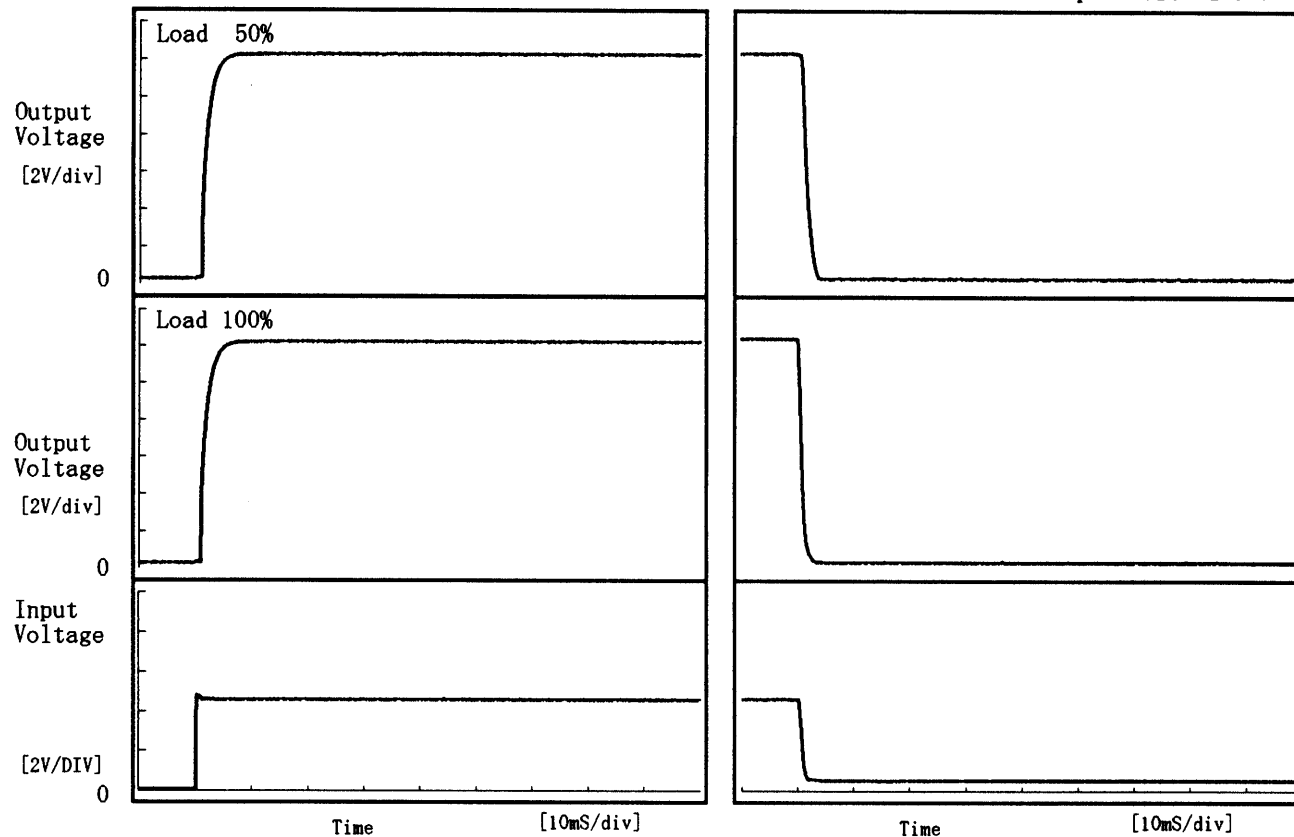

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	1.00	2.50	3.50	0.95	2.00
100 %	0.90	2.60	3.50	0.40	1.35

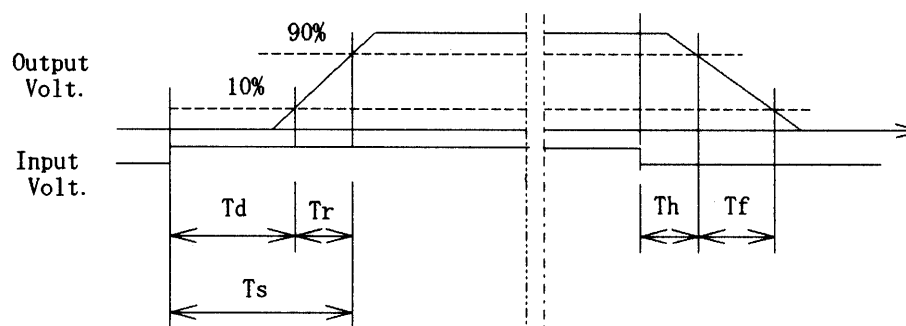

COSEL

Model ZUS1R50512


Item Ambient Temperature Drift

周囲温度変動

Object +12V0.13A

Testing Circuitry Figure A

1. Graph

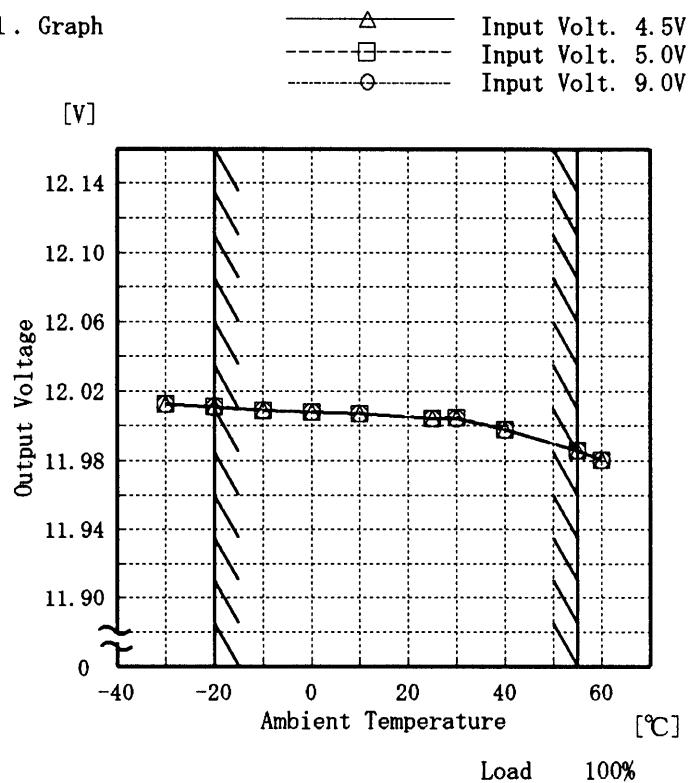

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Temperature	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	12.013	12.013	12.013
-20	12.011	12.011	12.011
-10	12.009	12.009	12.009
0	12.008	12.008	12.008
10	12.007	12.007	12.007
25	12.004	12.004	12.004
30	12.005	12.005	12.004
40	11.998	11.998	11.998
55	11.986	11.986	11.986
60	11.981	11.980	11.980
—	—	—	—

COSEL

Model

ZUS1R50512

Item

Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object


+12V0.13A

Testing Circuitry Figure A

1. Graph

-----□----- Load 50%
 -----△----- Load 100%

[V]

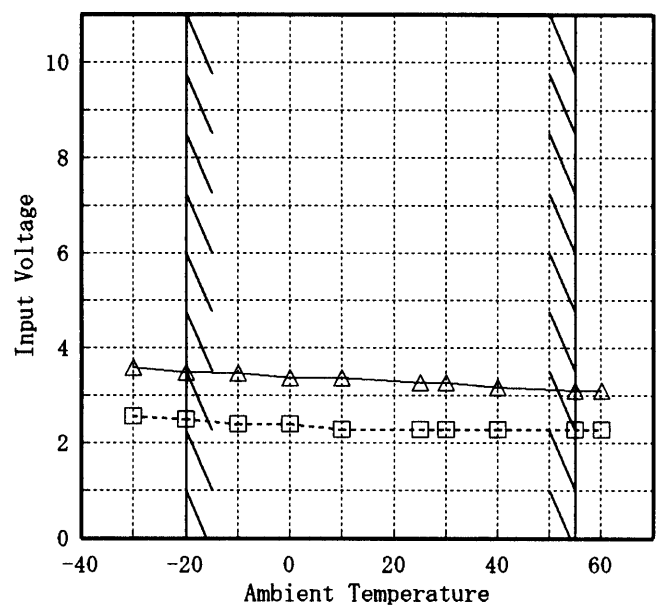

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	2.6	3.6
-20	2.5	3.5
-10	2.4	3.5
0	2.4	3.4
10	2.3	3.4
25	2.3	3.3
30	2.3	3.3
40	2.3	3.2
55	2.3	3.1
60	2.3	3.1
—	—	—

COSEL


Model ZUS1R50512

Item Ripple Voltage (by Ambient Temp.)
リップル電圧 (周囲温度特性)

Object +12V0.13A

Testing Circuitry Figure A

1. Graph

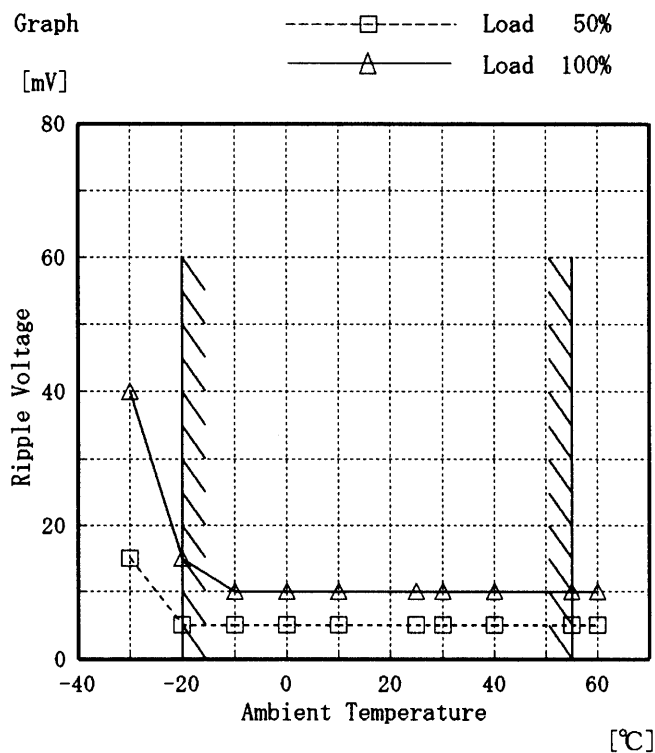

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-30	15	40
-20	5	15
-10	5	10
0	5	10
10	5	10
25	5	10
30	5	10
40	5	10
55	5	10
60	5	10
—	—	—

COSEL

Model

ZUS1R50512

Item

Time Lapse Drift 経時ドリフト


Temperature 25 °C

Testing Circuitry Figure A

Object

+12V0.13A

1. Graph

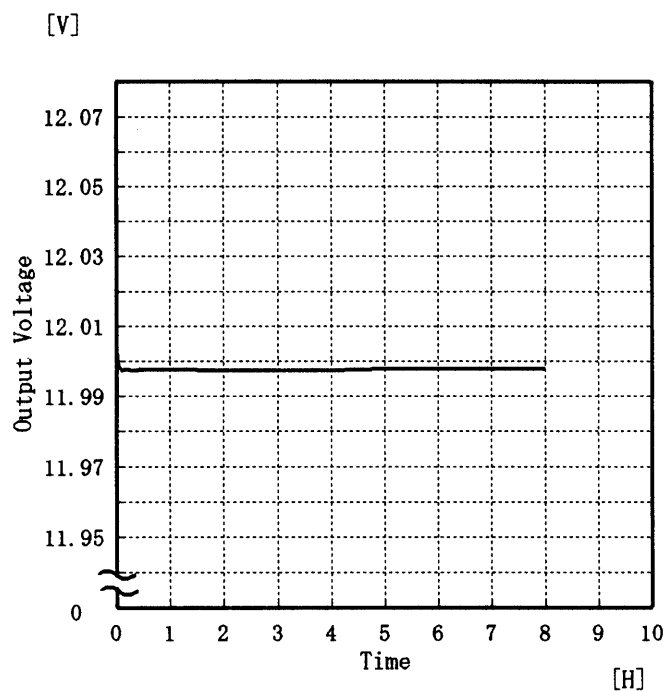

2. Values

Time since start [H]	Output Voltage [V]
0.0	12.003
0.5	11.998
1.0	11.998
2.0	11.998
3.0	11.998
4.0	11.998
5.0	11.998
6.0	11.998
7.0	11.998
8.0	11.998

COSEL

Model	ZUS1R50512	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+12V0.13A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 4.5~9.0 V

Load Current : 0.00~0.13 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 4.5~9.0 V

負荷電流 : 0.00~0.13 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ratio) [%]
Maximum Voltage	-20	9.0	0.00	12.013	±15	±0.2
Minimum Voltage	55	9.0	0.13	11.983		

COSEL

LOREL

Model	ZUS1R50512		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+12V 0.13A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 24℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で－10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温24℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	12.102	5	20
	2	12.111	5	20
	3	12.102	5	20
Load 100 %	1	12.101	10	30
	2	12.109	10	30
	3	12.100	10	30

Input Volt. 5.0 V

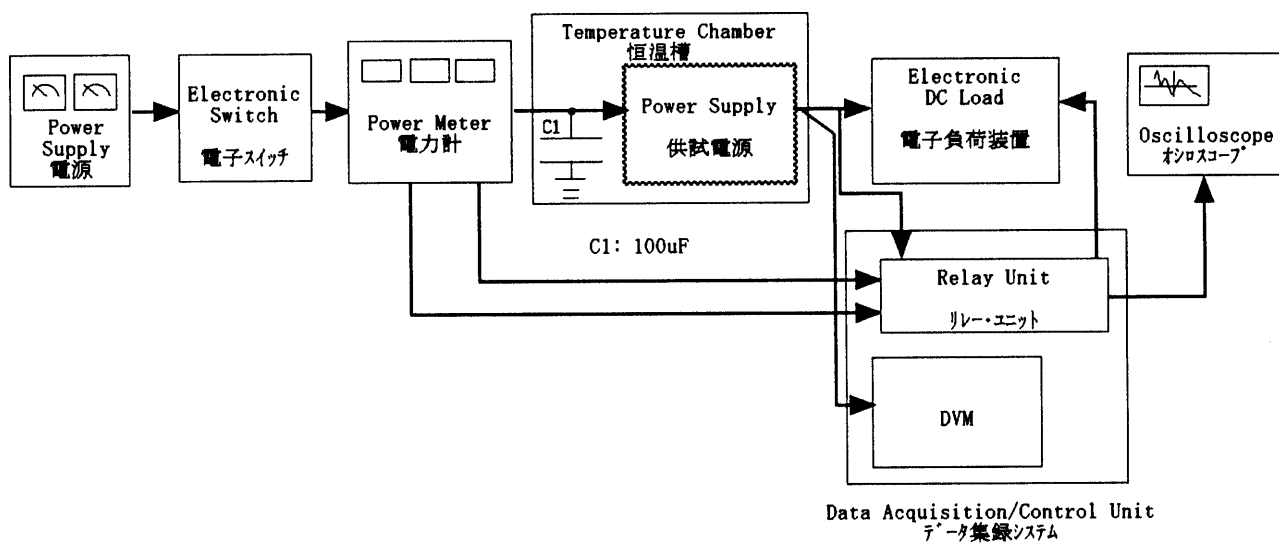
COSEL

Figure A