



TEST DATA OF CBS1002428

(24V INPUT)

Regulated DC Power Supply
Mar. 7, 2002

Approved by : Isao Yasuda
Isao Yasuda Design Manager

Prepared by : Kouichi Kinoshita
Kouichi Kinoshita Design Engineer

コーセル株式会社
COSEL CO.,LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Input Voltage)	2
入力電流 (入力電圧特性)	
3. Input Current (by Load Current)	3
入力電流 (負荷特性)	
4. Input Power (by Load Current)	4
入力電力 (負荷特性)	
5. Efficiency (by Input Voltage)	5
効率 (入力電圧特性)	
6. Efficiency (by Load Current)	6
効率 (負荷特性)	
7. Load Regulation	7
静的負荷変動	
8. Ripple Voltage (by Load Current)	8
リップル電圧 (負荷特性)	
9. Ripple-Noise	9
リップルノイズ	
10. Overcurrent Protection	10
過電流保護	
11. Overvoltage Protection	11
過電圧保護	
12. Dynamic Load Response	12
動的負荷変動	
13. Rise and Fall Time	13
立上り、立下り時間	
14. Ambient Temperature Drift	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature)	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift	17
経時ドリフト	
18. Output Voltage Accuracy	18
定電圧精度	
19. Condensation	19
結露特性	
20. Line Noise Tolerance	20
入力雑音耐量	
21. Figure of Testing Circuitry	21
測定回路図	

(Final Page 21)

COSEL

Model	CBS1002428	Temperature	25℃																																
Item	Line Regulation 静的入力変動	Testing Circuitry	Figure A																																
Object	+28V3.6A																																		
1. Graph		2. Values																																	
<div><div>---□---</div> Load 50%</div> <div><div>—△—</div> Load 100%</div> <p>Output Voltage [V]</p> <p>Input Voltage [V]</p>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>16</td><td>28.131</td><td>28.128</td></tr><tr><td>18</td><td>28.131</td><td>28.128</td></tr><tr><td>20</td><td>28.130</td><td>28.128</td></tr><tr><td>24</td><td>28.130</td><td>28.128</td></tr><tr><td>30</td><td>28.129</td><td>28.127</td></tr><tr><td>36</td><td>28.129</td><td>28.127</td></tr><tr><td>40</td><td>28.128</td><td>28.127</td></tr><tr><td>---</td><td>—</td><td>—</td></tr><tr><td>---</td><td>—</td><td>—</td></tr></table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	16	28.131	28.128	18	28.131	28.128	20	28.130	28.128	24	28.130	28.128	30	28.129	28.127	36	28.129	28.127	40	28.128	28.127	---	—	—	---	—	—
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
16	28.131	28.128																																	
18	28.131	28.128																																	
20	28.130	28.128																																	
24	28.130	28.128																																	
30	28.129	28.127																																	
36	28.129	28.127																																	
40	28.128	28.127																																	
---	—	—																																	
---	—	—																																	
Note: Slanted line shows the range of the rated input voltage.																																			
(注) 斜線は定格入力電圧範囲を示す。																																			

COSEL

ModelCBS1002428		Temperature25℃																																																																								
Item	Input Current (by Input Voltage) 入力電流（入力電圧特性）	Testing Circuitry	Figure A																																																																							
Object																																																																										
1. Graph		2. Values																																																																								
<div><div><div>—△—</div><div>Load 100%</div></div><div><div>---□---</div><div>Load 50%</div></div><div><div>-·-○-·-</div><div>Load 0%</div></div></div> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Load 0%</th><th>Load 50%</th><th>Load 100%</th></tr><tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr><tr><td>4.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr><tr><td>8.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr><tr><td>12.0</td><td>0.016</td><td>0.016</td><td>0.016</td></tr><tr><td>15.6</td><td>0.133</td><td>3.690</td><td>7.440</td></tr><tr><td>16.0</td><td>0.131</td><td>3.596</td><td>7.250</td></tr><tr><td>18.0</td><td>0.120</td><td>3.200</td><td>6.420</td></tr><tr><td>20.0</td><td>0.113</td><td>2.874</td><td>5.740</td></tr><tr><td>24.0</td><td>0.089</td><td>2.414</td><td>4.800</td></tr><tr><td>28.0</td><td>0.075</td><td>2.084</td><td>4.149</td></tr><tr><td>32.0</td><td>0.071</td><td>1.836</td><td>3.648</td></tr><tr><td>36.0</td><td>0.068</td><td>1.648</td><td>3.258</td></tr><tr><td>40.0</td><td>0.064</td><td>1.501</td><td>2.927</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr></table>		Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	4.0	0.000	0.000	0.000	8.0	0.000	0.000	0.000	12.0	0.016	0.016	0.016	15.6	0.133	3.690	7.440	16.0	0.131	3.596	7.250	18.0	0.120	3.200	6.420	20.0	0.113	2.874	5.740	24.0	0.089	2.414	4.800	28.0	0.075	2.084	4.149	32.0	0.071	1.836	3.648	36.0	0.068	1.648	3.258	40.0	0.064	1.501	2.927	--	—	—	—	--	—	—	—	--	—	—	—
Input Voltage [V]	Input Current [A]																																																																									
	Load 0%	Load 50%	Load 100%																																																																							
0	0.000	0.000	0.000																																																																							
4.0	0.000	0.000	0.000																																																																							
8.0	0.000	0.000	0.000																																																																							
12.0	0.016	0.016	0.016																																																																							
15.6	0.133	3.690	7.440																																																																							
16.0	0.131	3.596	7.250																																																																							
18.0	0.120	3.200	6.420																																																																							
20.0	0.113	2.874	5.740																																																																							
24.0	0.089	2.414	4.800																																																																							
28.0	0.075	2.084	4.149																																																																							
32.0	0.071	1.836	3.648																																																																							
36.0	0.068	1.648	3.258																																																																							
40.0	0.064	1.501	2.927																																																																							
--	—	—	—																																																																							
--	—	—	—																																																																							
--	—	—	—																																																																							

COSEL

Model		CBS1002428	
Item		Input Current (by Load Current) 入力電流 (負荷特性)	
Object			

1. Graph

—△—

Input Volt. 18V

---□---

Input Volt. 24V

---○---

Input Volt. 36V

Input Current [A]

Load Current [A]


Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Current [A]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.00	0.120	0.089	0.068
0.60	1.156	0.887	0.623
1.20	2.182	1.647	1.134
1.80	3.246	2.422	1.641
2.40	4.364	3.236	2.168
3.00	5.520	4.073	2.709
3.60	6.720	4.920	3.264
3.96	7.480	5.440	3.610
--	--	--	--
--	--	--	--
--	--	--	--

COSEL

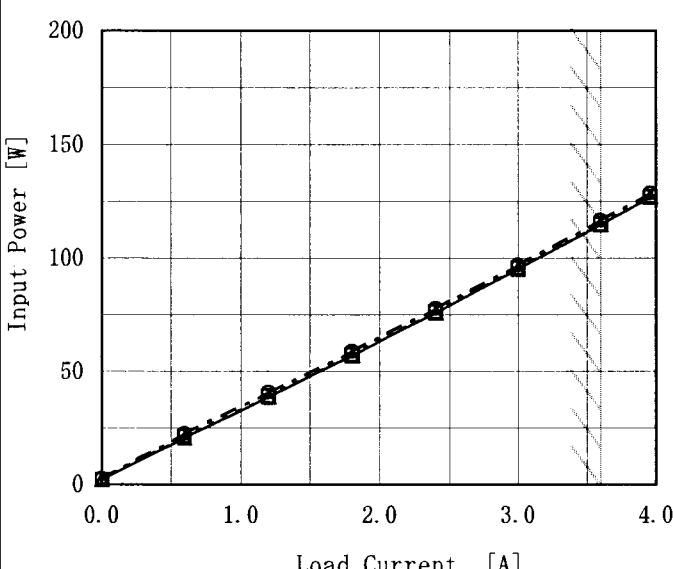Model		CBS1002428		Temperature		25℃																																																				
Item		Input Power (by Load Current) 入力電力（負荷特性）		Testing Circuitry		Figure A																																																				
Object																																																										
1. Graph		<div><div>—△—</div>Input Volt. 18V</div> <div><div>---□---</div>Input Volt. 24V</div> <div><div>-·-○-·-</div>Input Volt. 36V</div>		2. Values																																																						
<div><div>Input Power [W]</div><div></div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>0.00</td><td>2.2</td><td>2.2</td><td>2.5</td></tr><tr><td>0.60</td><td>20.6</td><td>21.2</td><td>22.5</td></tr><tr><td>1.20</td><td>38.6</td><td>39.1</td><td>40.8</td></tr><tr><td>1.80</td><td>56.9</td><td>57.4</td><td>58.8</td></tr><tr><td>2.40</td><td>75.8</td><td>76.2</td><td>77.7</td></tr><tr><td>3.00</td><td>95.2</td><td>95.5</td><td>96.8</td></tr><tr><td>3.60</td><td>114.7</td><td>114.9</td><td>116.5</td></tr><tr><td>3.96</td><td>126.9</td><td>126.8</td><td>128.6</td></tr><tr><td>---</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>---</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	2.2	2.2	2.5	0.60	20.6	21.2	22.5	1.20	38.6	39.1	40.8	1.80	56.9	57.4	58.8	2.40	75.8	76.2	77.7	3.00	95.2	95.5	96.8	3.60	114.7	114.9	116.5	3.96	126.9	126.8	128.6	---	—	—	—	--	—	—	—	---	—	—	—		
Load Current [A]	Input Power [W]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
0.00	2.2	2.2	2.5																																																							
0.60	20.6	21.2	22.5																																																							
1.20	38.6	39.1	40.8																																																							
1.80	56.9	57.4	58.8																																																							
2.40	75.8	76.2	77.7																																																							
3.00	95.2	95.5	96.8																																																							
3.60	114.7	114.9	116.5																																																							
3.96	126.9	126.8	128.6																																																							
---	—	—	—																																																							
--	—	—	—																																																							
---	—	—	—																																																							
Note: Slanted line shows the range of the rated load current.																																																										
(注) 斜線は定格負荷電流範囲を示す。																																																										

COSEL

ModelCBS1002428		Temperature25℃																																	
Item	Efficiency (by Input Voltage) 効率（入力電圧特性）	Testing Circuitry	Figure A																																
Object																																			
1. Graph		2. Values																																	
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <p>Efficiency [%]</p> <p>Input Voltage [V]</p>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>16</td><td>88.2</td><td>87.5</td></tr><tr><td>18</td><td>88.4</td><td>88.0</td></tr><tr><td>20</td><td>88.1</td><td>87.9</td></tr><tr><td>24</td><td>87.5</td><td>87.7</td></tr><tr><td>30</td><td>86.4</td><td>87.2</td></tr><tr><td>36</td><td>85.4</td><td>86.5</td></tr><tr><td>40</td><td>84.2</td><td>86.5</td></tr><tr><td>--</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td></tr></table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	16	88.2	87.5	18	88.4	88.0	20	88.1	87.9	24	87.5	87.7	30	86.4	87.2	36	85.4	86.5	40	84.2	86.5	--	—	—	--	—	—
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
16	88.2	87.5																																	
18	88.4	88.0																																	
20	88.1	87.9																																	
24	87.5	87.7																																	
30	86.4	87.2																																	
36	85.4	86.5																																	
40	84.2	86.5																																	
--	—	—																																	
--	—	—																																	
Note: Slanted line shows the range of the rated input voltage.																																			
(注) 斜線は定格入力電圧範囲を示す。																																			

COSEL

Model		CBS1002428	
Item		Efficiency (by Load Current) 効率 (負荷特性)	
Object			

1. Graph

—△—

Input Volt.

18V

---□---

Input Volt.

24V

---○---

Input Volt.

36V

Efficiency [%]

100

92

84

76

68

60

52

44

0.0


1.0

2.0

3.0

4.0

Load Current [A]

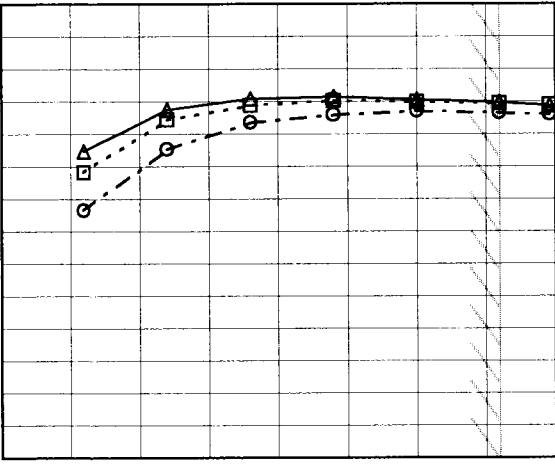

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.00	—	—	—
0.60	81.9	79.3	74.6
1.20	87.0	85.8	82.1
1.80	88.3	87.5	85.4
2.40	88.6	88.1	86.4
3.00	88.2	87.9	86.8
3.60	87.9	87.8	86.6
3.96	87.5	87.6	86.4
--	—	—	—
--	—	—	—
--	—	—	—

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

COSEL

Model		CBS1002428	
Item		Load Regulation 静的負荷変動	
Object		+28V3.6A	

1. Graph

—△—

Input Volt. 18V

---□---

Input Volt. 24V

---○---

Input Volt. 36V

Output Voltage [V]

<


COSEL

Model		CBS1002428																																																																											
Item	Ripple Voltage (by Load Current) リップル電圧 (負荷特性)		Temperature 25℃ Testing Circuitry Figure A																																																																										
Object	+28V3.6A																																																																												
1. Graph		2. Values																																																																											
<div><div><div>—△— Input Volt. 18V</div><div>-·-○-·- Input Volt. 36V</div></div><table><thead><tr><th>Load Current [A]</th><th>18V Input [mV]</th><th>36V Input [mV]</th></tr></thead><tbody><tr><td>0.0</td><td>5</td><td>15</td></tr><tr><td>0.7</td><td>15</td><td>20</td></tr><tr><td>1.4</td><td>15</td><td>20</td></tr><tr><td>2.2</td><td>15</td><td>20</td></tr><tr><td>2.9</td><td>15</td><td>20</td></tr><tr><td>3.6</td><td>15</td><td>20</td></tr><tr><td>4.3</td><td>15</td><td>20</td></tr><tr><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td></tr></tbody></table></div>		Load Current [A]	18V Input [mV]	36V Input [mV]	0.0	5	15	0.7	15	20	1.4	15	20	2.2	15	20	2.9	15	20	3.6	15	20	4.3	15	20	--	--	--	--	--	--	--	--	--	--	--	--	<table><thead><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple Voltage [mV]</th></tr><tr><th>Input Volt. 18 [V]</th><th>Input Volt. 36 [V]</th></tr></thead><tbody><tr><td>0.0</td><td>5</td><td>15</td></tr><tr><td>0.7</td><td>15</td><td>20</td></tr><tr><td>1.4</td><td>15</td><td>20</td></tr><tr><td>2.2</td><td>15</td><td>20</td></tr><tr><td>2.9</td><td>15</td><td>20</td></tr><tr><td>3.6</td><td>15</td><td>20</td></tr><tr><td>4.3</td><td>15</td><td>20</td></tr><tr><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td></tr></tbody></table>		Load Current [A]	Ripple Voltage [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.0	5	15	0.7	15	20	1.4	15	20	2.2	15	20	2.9	15	20	3.6	15	20	4.3	15	20	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	18V Input [mV]	36V Input [mV]																																																																											
0.0	5	15																																																																											
0.7	15	20																																																																											
1.4	15	20																																																																											
2.2	15	20																																																																											
2.9	15	20																																																																											
3.6	15	20																																																																											
4.3	15	20																																																																											
--	--	--																																																																											
--	--	--																																																																											
--	--	--																																																																											
--	--	--																																																																											
Load Current [A]	Ripple Voltage [mV]																																																																												
	Input Volt. 18 [V]	Input Volt. 36 [V]																																																																											
0.0	5	15																																																																											
0.7	15	20																																																																											
1.4	15	20																																																																											
2.2	15	20																																																																											
2.9	15	20																																																																											
3.6	15	20																																																																											
4.3	15	20																																																																											
--	--	--																																																																											
--	--	--																																																																											
--	--	--																																																																											
--	--	--																																																																											
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																																													
<div><div>Ripple [mVp-p]</div></div> <div><div>Fig. Complex Ripple Wave Form</div><div>図 リップル波形詳細図</div></div>																																																																													

COSEL

Model	CBS1002428
Item	Ripple-Noise リップルノイズ
Object	+28V3.6A

1. Graph

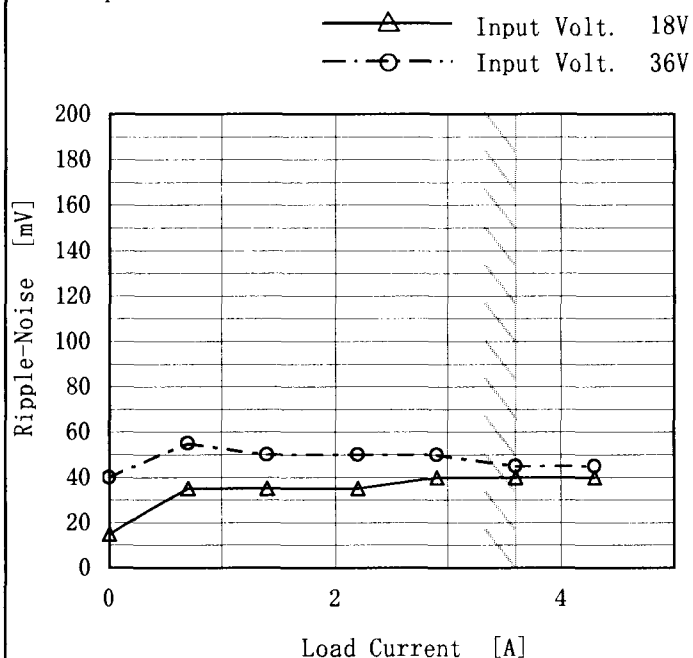

Ripple-Noise is shown as p-p in the figure below.
 Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p-p 値で示される。
 (注) 斜線は定格負荷電流範囲を示す。

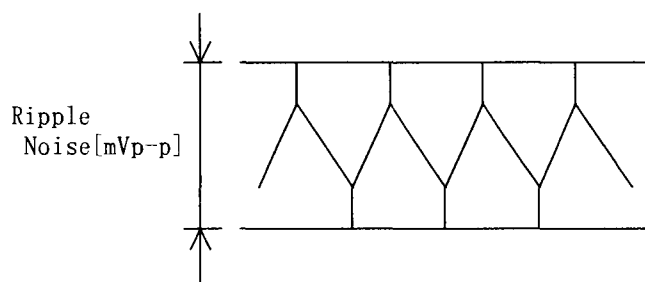


Fig. Complex Ripple Noise Wave Form
 図 リップルノイズ波形

Temperature 25℃
 Testing Circuitry Figure A

2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.0	15	40
0.7	35	55
1.4	35	50
2.2	35	50
2.9	40	50
3.6	40	45
4.3	40	45
--	--	--
--	--	--
--	--	--

COSEL


ModelCBS1002428		Temperature25℃																																																												
ItemOvercurrent Protection 過電流保護		Testing CircuitryFigure A																																																												
Object+28V3.6A																																																														
1. Graph		2. Values																																																												
<div><div><div>—Input Volt. 18V</div><div>·····Input Volt. 24V</div><div>·····Input Volt. 36V</div></div><div>Output Voltage [V]</div><div>Load Current [A]</div></div> <div>Note: Slanted line shows the range of the rated load current. (注) 斜線は定格負荷電流範囲を示す。</div> <div>Intermittent operation occurs when the output voltage is from 19.6V to 0V. 19.6V～0V間は、間欠モードとなる。</div>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>28.0</td><td>3.70</td><td>3.63</td><td>3.63</td></tr><tr><td>26.6</td><td>4.67</td><td>4.62</td><td>4.74</td></tr><tr><td>25.2</td><td>4.67</td><td>4.63</td><td>4.73</td></tr><tr><td>22.4</td><td>4.67</td><td>4.67</td><td>4.72</td></tr><tr><td>19.6</td><td>4.68</td><td>4.68</td><td>4.83</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr></table>		Output Voltage [V]	Load Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	28.0	3.70	3.63	3.63	26.6	4.67	4.62	4.74	25.2	4.67	4.63	4.73	22.4	4.67	4.67	4.72	19.6	4.68	4.68	4.83	--	—	—	—	--	—	—	—	--	—	—	—	--	—	—	—	--	—	—	—	--	—	—	—	--	—	—	—	--	—	—	—
Output Voltage [V]	Load Current [A]																																																													
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																											
28.0	3.70	3.63	3.63																																																											
26.6	4.67	4.62	4.74																																																											
25.2	4.67	4.63	4.73																																																											
22.4	4.67	4.67	4.72																																																											
19.6	4.68	4.68	4.83																																																											
--	—	—	—																																																											
--	—	—	—																																																											
--	—	—	—																																																											
--	—	—	—																																																											
--	—	—	—																																																											
--	—	—	—																																																											
--	—	—	—																																																											
--	—	—	—																																																											

COSEL

Model	CBS1002428
Item	Overvoltage Protection 過電圧保護
Object	+28V3.6A

1. Graph

—△— Input Volt. 18V
 ---□--- Input Volt. 24V
 -·-○-·- Input Volt. 36V

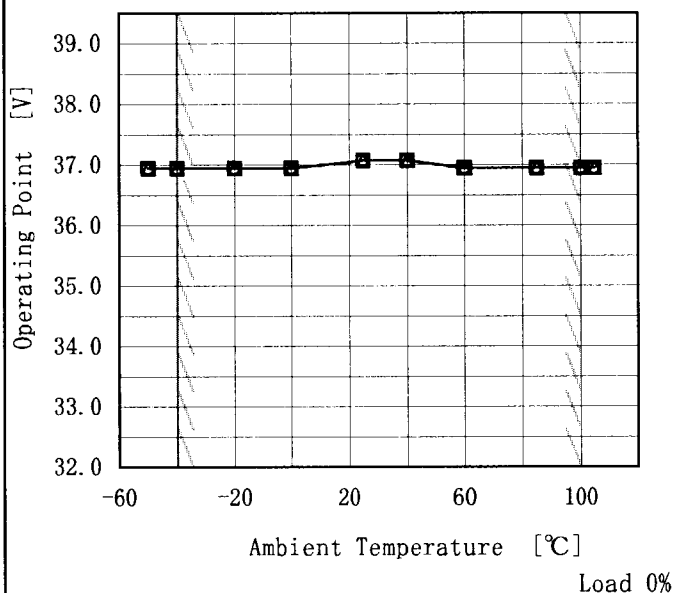

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
-50	36.95	36.95	36.95
-40	36.95	36.95	36.95
-20	36.95	36.95	36.95
0	36.95	36.95	36.95
25	37.07	37.07	37.07
40	37.07	37.07	37.07
60	36.95	36.95	36.95
85	36.95	36.95	36.95
100	36.95	36.95	36.95
105	36.95	36.95	36.95
--	—	—	—

COSEL


Model	CBS1002428	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Response 動的負荷変動	
Object	+28V3.6A	

Input Volt. 24 V
Cycle 1000 ms


Load Current

Min. Load (0A) \longleftrightarrow
Load 100% (3.6A)

500 mV/div

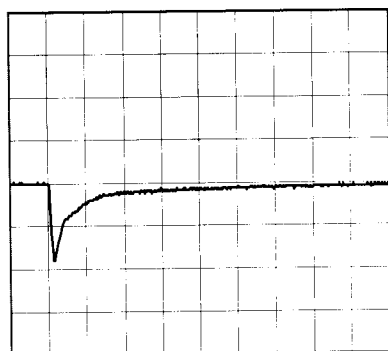


500 μ s/div

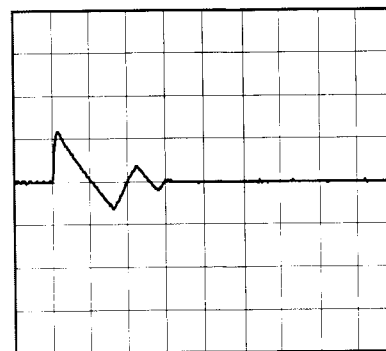


5 ms/div

Min. Load (0A) \longleftrightarrow
Load 50% (1.8A)

500 mV/div

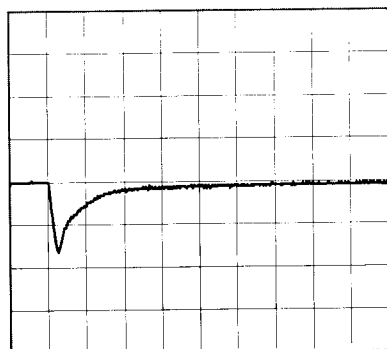


500 μ s/div

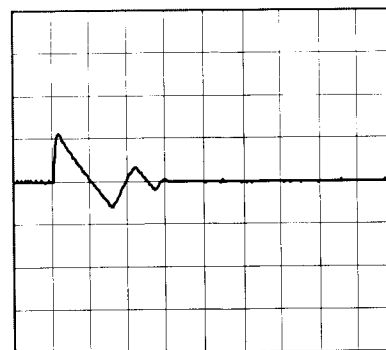


5 ms/div

Load 10% (0.36A) \longleftrightarrow
Load 100% (3.6A)

500 mV/div

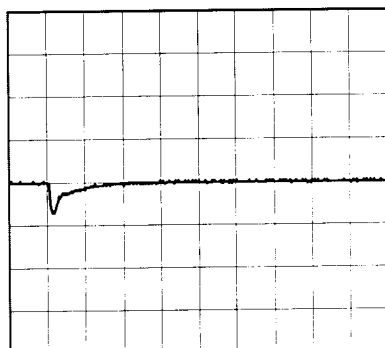

500 μ s/div

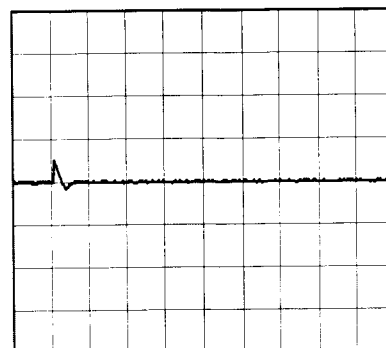


5 ms/div

COSEL

Model	CBS1002428	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+28V3.6A		

1. Graph


Input Volt. 18 V

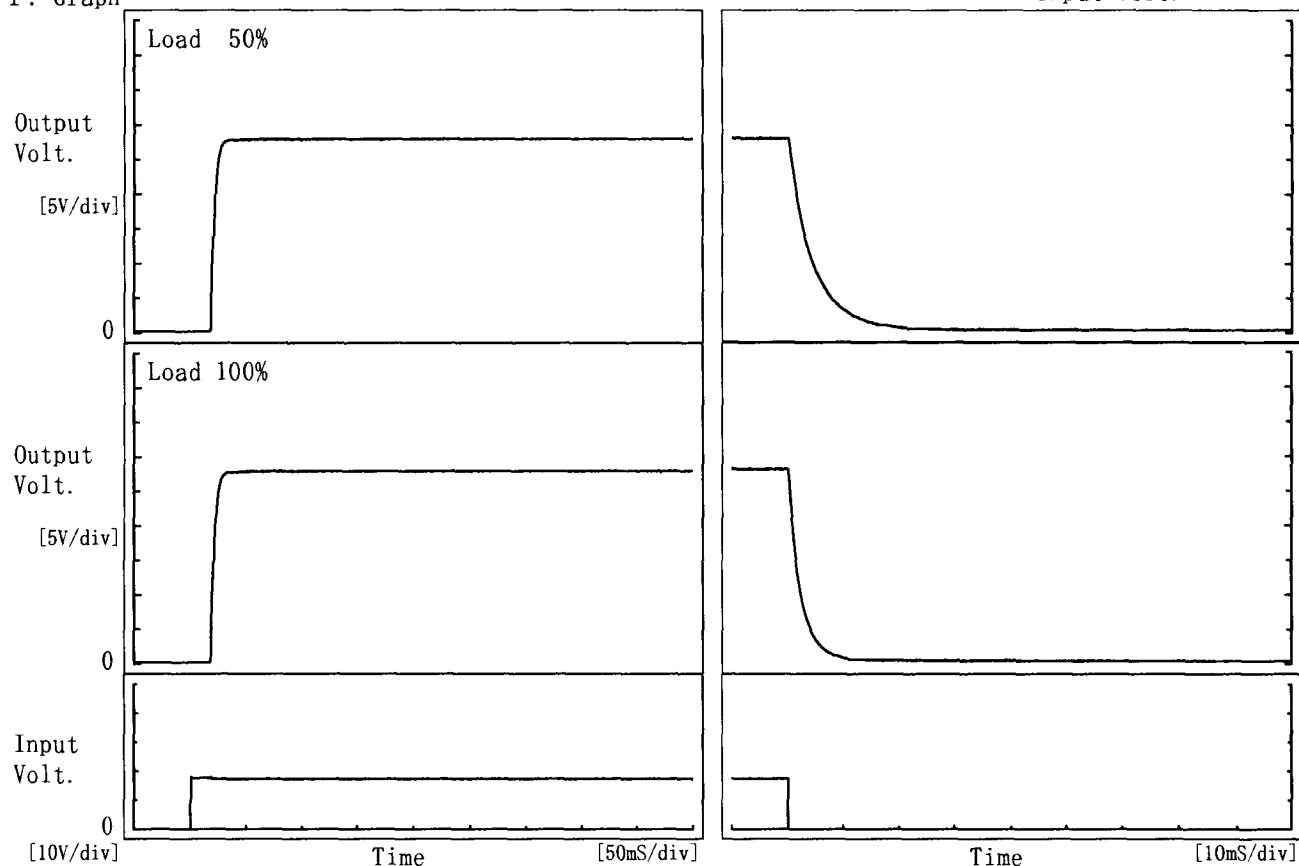

2. Values

[mS]


Load \ Time	T d	T r	T s	T h	T f
50 %	18.5	7.5	26.0	0.5	10.2
100 %	18.5	7.5	26.0	0.3	5.2

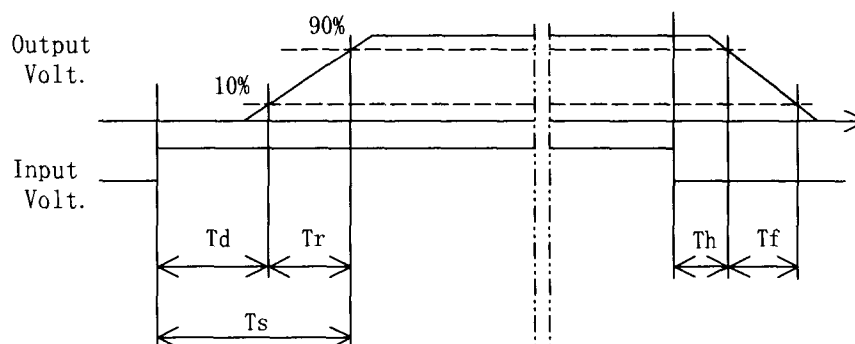

COSEL

Model	CBS1002428
Item	Ambient Temperature Drift 周囲温度変動
Object	+28V3.6A

1. Graph
- △— Input Volt. 18V
 ---□--- Input Volt. 24V
 -·-○-·- Input Volt. 36V

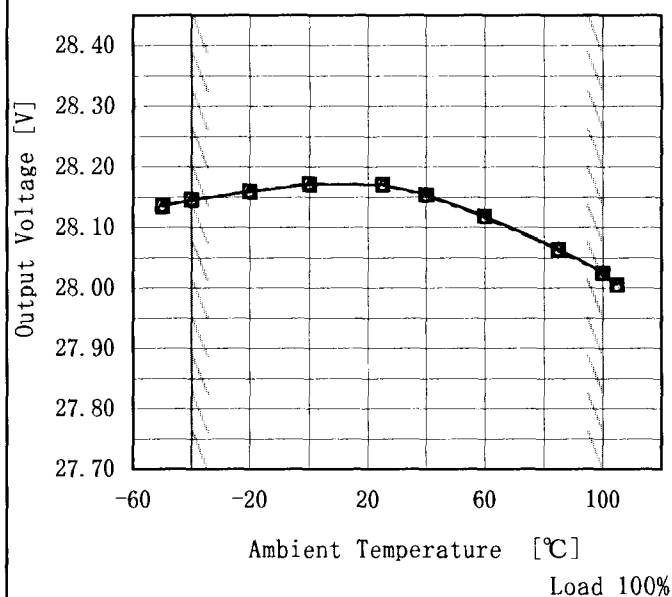

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
-50	28.135	28.136	28.137
-40	28.146	28.146	28.146
-20	28.159	28.160	28.160
0	28.172	28.172	28.173
25	28.171	28.171	28.171
40	28.155	28.154	28.154
60	28.120	28.118	28.118
85	28.064	28.063	28.063
100	28.025	28.025	28.023
105	28.006	28.005	28.004
--	—	—	—


COSEL

<

COSEL

Model	CBS1002428																																						
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)	Testing Circuitry	Figure A																																				
Object	+28V3.6A																																						
1. Graph		2. Values																																					
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <table><thead><tr><th>Ambient Temperature [°C]</th><th>Load 50% [mV]</th><th>Load 100% [mV]</th></tr></thead><tbody><tr><td>-50</td><td>35</td><td>35</td></tr><tr><td>-40</td><td>25</td><td>25</td></tr><tr><td>-20</td><td>20</td><td>20</td></tr><tr><td>0</td><td>20</td><td>20</td></tr><tr><td>25</td><td>20</td><td>20</td></tr><tr><td>40</td><td>20</td><td>20</td></tr><tr><td>60</td><td>20</td><td>20</td></tr><tr><td>85</td><td>15</td><td>15</td></tr><tr><td>100</td><td>10</td><td>10</td></tr><tr><td>105</td><td>10</td><td>10</td></tr><tr><td>---</td><td>---</td><td>---</td></tr></tbody></table> <p>Input Volt. 24V</p>		Ambient Temperature [°C]	Load 50% [mV]	Load 100% [mV]	-50	35	35	-40	25	25	-20	20	20	0	20	20	25	20	20	40	20	20	60	20	20	85	15	15	100	10	10	105	10	10	---	---	---		
Ambient Temperature [°C]	Load 50% [mV]	Load 100% [mV]																																					
-50	35	35																																					
-40	25	25																																					
-20	20	20																																					
0	20	20																																					
25	20	20																																					
40	20	20																																					
60	20	20																																					
85	15	15																																					
100	10	10																																					
105	10	10																																					
---	---	---																																					
Note: Slanted line shows the range of the rated ambient temperature.																																							
(注) 斜線は定格周囲温度範囲を示す。																																							

COSEL

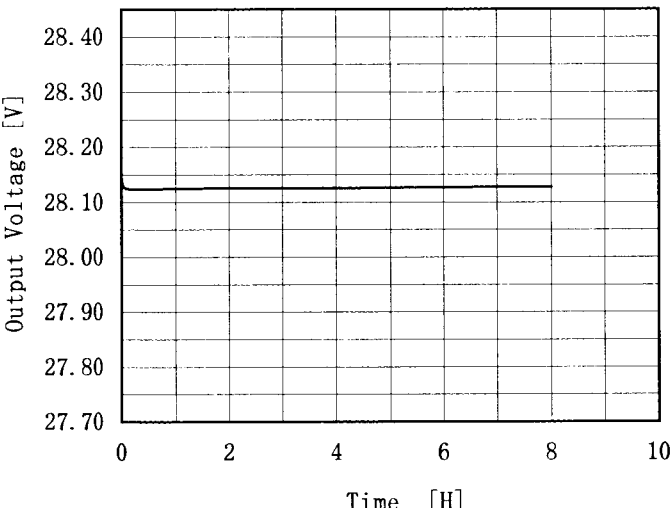Model	CBS1002428																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25℃																						
		Testing Circuitry	Figure A																						
Object	+28V3.6A																								
1. Graph		2. Values																							
<div><p>Output Voltage [V]</p><p>Time [H]</p><p>Input Volt. 24V</p><p>Load 100%</p></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>28.148</td></tr><tr><td>0.5</td><td>28.124</td></tr><tr><td>1.0</td><td>28.125</td></tr><tr><td>2.0</td><td>28.125</td></tr><tr><td>3.0</td><td>28.126</td></tr><tr><td>4.0</td><td>28.126</td></tr><tr><td>5.0</td><td>28.126</td></tr><tr><td>6.0</td><td>28.127</td></tr><tr><td>7.0</td><td>28.127</td></tr><tr><td>8.0</td><td>28.127</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	28.148	0.5	28.124	1.0	28.125	2.0	28.125	3.0	28.126	4.0	28.126	5.0	28.126	6.0	28.127	7.0	28.127	8.0	28.127
Time since start [H]	Output Voltage [V]																								
0.0	28.148																								
0.5	28.124																								
1.0	28.125																								
2.0	28.125																								
3.0	28.126																								
4.0	28.126																								
5.0	28.126																								
6.0	28.127																								
7.0	28.127																								
8.0	28.127																								

COSEL

Model		CBS1002428	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+28V3.6A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 ~ 100℃

Input Voltage : 18 ~ 36V

Load Current : 0 ~ 3.6A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -40 ~ 100℃

入力電圧 : 18 ~ 36V

負荷電流 : 0 ~ 3.6A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

2. Values

Item	Temperature [℃]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	25	18	3.6	28.169	± 79	± 0.3
Minimum Voltage	100	36	3.6	28.012		

LOGEL

		Testing Circuitry Figure A
Model	CBS1002428	
Item	Condense 結露特性	
Object	+28V3.6A	

1. Condensation test

Testing procedure is as follows.

① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.

② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.

③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で－10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	28.186	Input Volt. :24V, Load Current. :3.6A
Line Regulation [mV]	2	Input Volt. :18～36V, Load Current. :3.6A
Load Regulation [mV]	1	Input Volt. :24V, Load Current. :0～3.6A

— 19 —

BC-3424

COSEL

Model	CBS1002428		
Item	Line Noise Tolerance 入力雑音耐量	Temperature	25℃
Object	+28V3.6A	Testing Circuitry	Figure B




1. Conditions

- Input Voltage : 24 V
- Pulse Voltage : 2000 V
- Pulse Cycle : 16.7 mS
- Pulse Input Duration : 1 min. or more
- Load : 100 %

2. Results

Pulse Width [nS]	MODE		No protection failure should occur	DC-like Regulation of Output Voltage
		POLARITY	保護回路の誤動作がない	出力電圧の直流的変動
50	COMMON	+	OK	no fluctuation
		—	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		—	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		—	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		—	OK	no fluctuation

COSEL

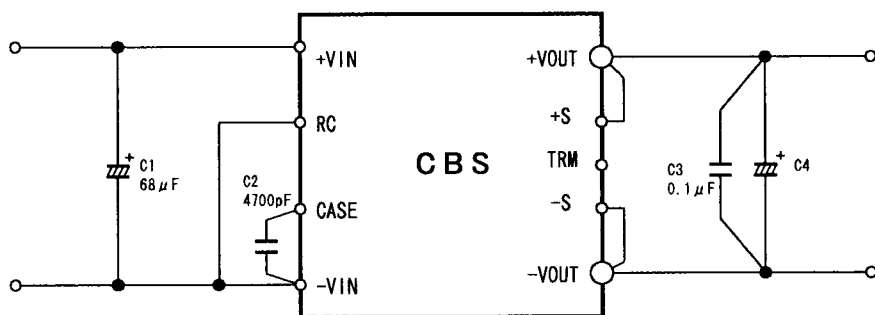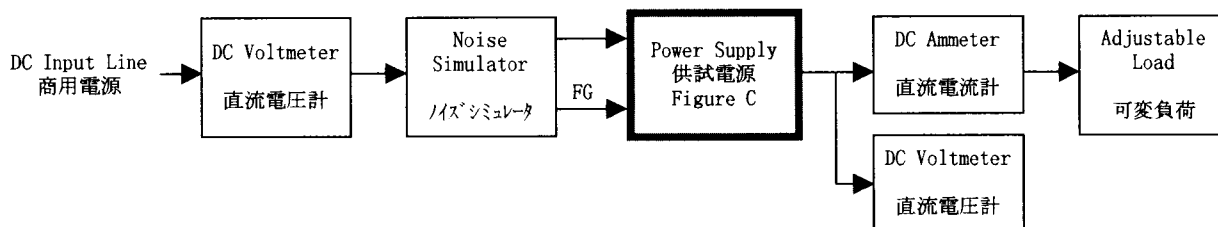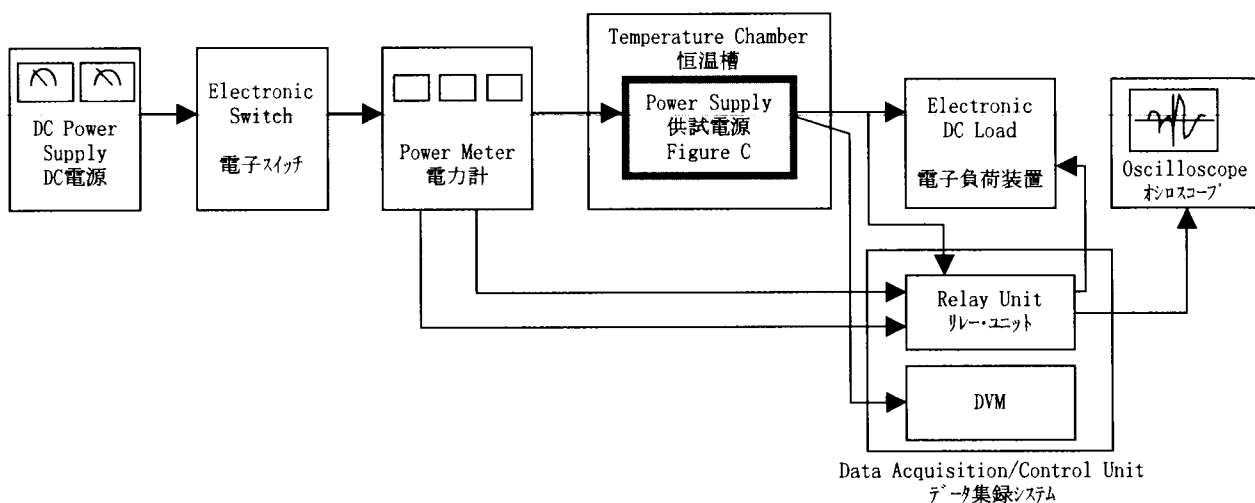

C1 : 50V 68 μ F
 C2 : 4700pF
 C3 : 50V 0.1 μ F
 C4 : 35V 220 μ F $\times 2$ ($-40^{\circ}\text{C} \leq T_B \leq -20^{\circ}\text{C}$)
 35V 220 μ F ($-20^{\circ}\text{C} < T_B \leq 100^{\circ}\text{C}$)
 T_B : Base Plate Temp.