



# TEST DATA OF CBS2002428

(24V INPUT)

Regulated DC Power Supply  
Apr. 9, 2002

Approved by : Isao Yasuda  
Isao Yasuda Design Manager

Prepared by : Tomoaki Oiwake  
Tomoaki Oiwake Design Engineer

**コーセル株式会社**  
**COSEL CO.,LTD.**

CONTENTS


1. Line Regulation . . . . .	1
静的入力変動	
2. Input Current (by Input Voltage) . . . . .	2
入力電流 (入力電圧特性)	
3. Input Current (by Load Current) . . . . .	3
入力電流 (負荷特性)	
4. Input Power (by Load Current) . . . . .	4
入力電力 (負荷特性)	
5. Efficiency (by Input Voltage) . . . . .	5
効率 (入力電圧特性)	
6. Efficiency (by Load Current) . . . . .	6
効率 (負荷特性)	
7. Load Regulation . . . . .	7
静的負荷変動	
8. Ripple Voltage (by Load Current) . . . . .	8
リップル電圧 (負荷特性)	
9. Ripple-Noise . . . . .	9
リップルノイズ	
10. Overcurrent Protection . . . . .	10
過電流保護	
11. Overvoltage Protection . . . . .	11
過電圧保護	
12. Dynamic Load Response . . . . .	12
動的負荷変動	
13. Rise and Fall Time . . . . .	13
立上り、立下り時間	
14. Ambient Temperature Drift . . . . .	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage . . . . .	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature) . . . . .	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift . . . . .	17
経時ドリフト	
18. Output Voltage Accuracy . . . . .	18
定電圧精度	
19. Condensation . . . . .	19
結露特性	
20. Line Noise Tolerance . . . . .	20
入力雑音耐量	
21. Figure of Testing Circuitry . . . . .	21
測定回路図	

(Final Page 21)

# COSEL

Model	CBS2002428																																		
Item	Line Regulation 静的入力変動	Temperature	25℃																																
		Testing Circuitry	Figure A																																
Object	+28V7.2A																																		
1. Graph		2. Values																																	
<div><div>---□---</div> Load 50%</div> <div><div>—△—</div> Load 100%</div> <p>Output Voltage [V]</p> <p>Input Voltage [V]</p>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>16</td><td>28.037</td><td>28.033</td></tr><tr><td>18</td><td>28.036</td><td>28.033</td></tr><tr><td>20</td><td>28.036</td><td>28.033</td></tr><tr><td>24</td><td>28.036</td><td>28.033</td></tr><tr><td>30</td><td>28.035</td><td>28.033</td></tr><tr><td>36</td><td>28.035</td><td>28.033</td></tr><tr><td>40</td><td>28.034</td><td>28.033</td></tr><tr><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td></tr></table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	16	28.037	28.033	18	28.036	28.033	20	28.036	28.033	24	28.036	28.033	30	28.035	28.033	36	28.035	28.033	40	28.034	28.033	--	--	--	--	--	--
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
16	28.037	28.033																																	
18	28.036	28.033																																	
20	28.036	28.033																																	
24	28.036	28.033																																	
30	28.035	28.033																																	
36	28.035	28.033																																	
40	28.034	28.033																																	
--	--	--																																	
--	--	--																																	
Note: Slanted line shows the range of the rated input voltage.																																			
(注) 斜線は定格入力電圧範囲を示す。																																			

# COSEL

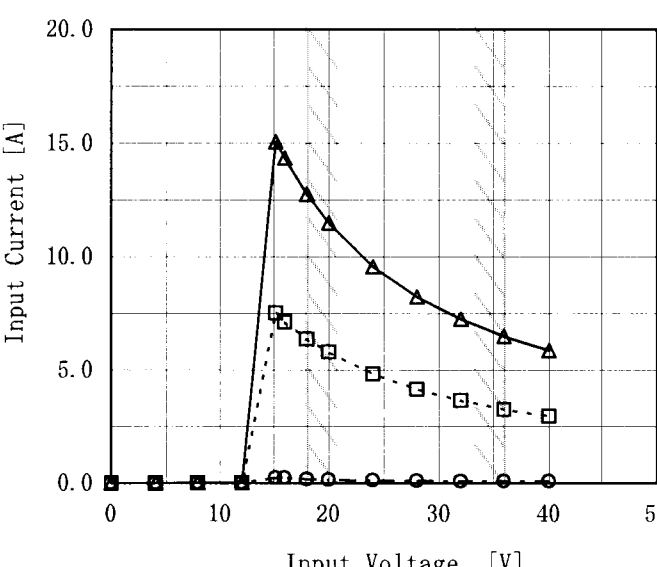Model		CBS2002428		Temperature		25℃																																																																								
Item		Input Current (by Input Voltage) 入力電流（入力電圧特性）		Testing Circuitry		Figure A																																																																								
Object																																																																														
1. Graph				2. Values																																																																										
<div><div><div>—△— Load 100%</div><div>---□--- Load 50%</div><div>-○- Load 0%</div></div><p>Note: Slanted line shows the range of the rated input voltage.</p><p>(注) 斜線は定格入力電圧範囲を示す。</p></div>				<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Load 0%</th><th>Load 50%</th><th>Load 100%</th></tr><tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr><tr><td>4.0</td><td>0.000</td><td>0.001</td><td>0.000</td></tr><tr><td>8.0</td><td>0.021</td><td>0.021</td><td>0.020</td></tr><tr><td>12.0</td><td>0.016</td><td>0.016</td><td>0.016</td></tr><tr><td>15.2</td><td>0.232</td><td>7.512</td><td>15.060</td></tr><tr><td>16.0</td><td>0.226</td><td>7.132</td><td>14.349</td></tr><tr><td>18.0</td><td>0.163</td><td>6.375</td><td>12.743</td></tr><tr><td>20.0</td><td>0.149</td><td>5.806</td><td>11.482</td></tr><tr><td>24.0</td><td>0.129</td><td>4.837</td><td>9.569</td></tr><tr><td>28.0</td><td>0.109</td><td>4.160</td><td>8.240</td></tr><tr><td>32.0</td><td>0.091</td><td>3.653</td><td>7.240</td></tr><tr><td>36.0</td><td>0.084</td><td>3.264</td><td>6.493</td></tr><tr><td>40.0</td><td>0.077</td><td>2.963</td><td>5.867</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr></table>				Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	4.0	0.000	0.001	0.000	8.0	0.021	0.021	0.020	12.0	0.016	0.016	0.016	15.2	0.232	7.512	15.060	16.0	0.226	7.132	14.349	18.0	0.163	6.375	12.743	20.0	0.149	5.806	11.482	24.0	0.129	4.837	9.569	28.0	0.109	4.160	8.240	32.0	0.091	3.653	7.240	36.0	0.084	3.264	6.493	40.0	0.077	2.963	5.867	--	--	--	--	--	--	--	--	--	--	--	--
Input Voltage [V]	Input Current [A]																																																																													
	Load 0%	Load 50%	Load 100%																																																																											
0	0.000	0.000	0.000																																																																											
4.0	0.000	0.001	0.000																																																																											
8.0	0.021	0.021	0.020																																																																											
12.0	0.016	0.016	0.016																																																																											
15.2	0.232	7.512	15.060																																																																											
16.0	0.226	7.132	14.349																																																																											
18.0	0.163	6.375	12.743																																																																											
20.0	0.149	5.806	11.482																																																																											
24.0	0.129	4.837	9.569																																																																											
28.0	0.109	4.160	8.240																																																																											
32.0	0.091	3.653	7.240																																																																											
36.0	0.084	3.264	6.493																																																																											
40.0	0.077	2.963	5.867																																																																											
--	--	--	--																																																																											
--	--	--	--																																																																											
--	--	--	--																																																																											

Model		CBS2002428		Temperature		25℃																																																				
Item		Input Current (by Load Current) 入力電流（負荷特性）		Testing Circuitry		Figure A																																																				
Object																																																										
1. Graph				2. Values																																																						
<div><div><div>—△—</div><div>---□---</div><div>-○-</div></div><div><div>Input Volt.</div><div>Input Volt.</div><div>Input Volt.</div></div><div><div>18V</div><div>24V</div><div>36V</div></div></div> <div><div>20.0</div><div>15.0</div><div>10.0</div><div>5.0</div><div>0.0</div></div> <div><div>Input Current [A]</div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div></div> <div><div>Load Current [A]</div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div><div>(注) 斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>0.00</td><td>0.161</td><td>0.130</td><td>0.085</td></tr><tr><td>1.00</td><td>1.897</td><td>1.455</td><td>1.013</td></tr><tr><td>2.00</td><td>3.562</td><td>2.703</td><td>1.878</td></tr><tr><td>3.00</td><td>5.287</td><td>3.974</td><td>2.717</td></tr><tr><td>4.00</td><td>6.937</td><td>5.282</td><td>3.577</td></tr><tr><td>5.00</td><td>8.711</td><td>6.606</td><td>4.413</td></tr><tr><td>6.00</td><td>10.550</td><td>7.856</td><td>5.312</td></tr><tr><td>7.00</td><td>12.295</td><td>9.223</td><td>6.204</td></tr><tr><td>7.20</td><td>12.666</td><td>9.489</td><td>6.381</td></tr><tr><td>7.92</td><td>14.060</td><td>10.503</td><td>7.037</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.161	0.130	0.085	1.00	1.897	1.455	1.013	2.00	3.562	2.703	1.878	3.00	5.287	3.974	2.717	4.00	6.937	5.282	3.577	5.00	8.711	6.606	4.413	6.00	10.550	7.856	5.312	7.00	12.295	9.223	6.204	7.20	12.666	9.489	6.381	7.92	14.060	10.503	7.037	--	—	—	—
Load Current [A]	Input Current [A]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
0.00	0.161	0.130	0.085																																																							
1.00	1.897	1.455	1.013																																																							
2.00	3.562	2.703	1.878																																																							
3.00	5.287	3.974	2.717																																																							
4.00	6.937	5.282	3.577																																																							
5.00	8.711	6.606	4.413																																																							
6.00	10.550	7.856	5.312																																																							
7.00	12.295	9.223	6.204																																																							
7.20	12.666	9.489	6.381																																																							
7.92	14.060	10.503	7.037																																																							
--	—	—	—																																																							

# COSEL

Model		CBS2002428		Temperature		25℃																																																				
Item		Input Power (by Load Current) 入力電力（負荷特性）		Testing Circuitry		Figure A																																																				
Object																																																										
1. Graph				2. Values																																																						
<div><div><div>—△—</div><div>Input Volt.</div><div>18V</div></div><div><div>---□---</div><div>Input Volt.</div><div>24V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>36V</div></div></div> <div><p>Note: Slanted line shows the range of the rated load current.</p><p>(注) 斜線は定格負荷電流範囲を示す。</p></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>0.00</td><td>2.9</td><td>3.1</td><td>3.1</td></tr><tr><td>1.00</td><td>34.2</td><td>35.1</td><td>36.4</td></tr><tr><td>2.00</td><td>63.9</td><td>65.0</td><td>67.5</td></tr><tr><td>3.00</td><td>94.4</td><td>95.2</td><td>97.5</td></tr><tr><td>4.00</td><td>125.2</td><td>126.2</td><td>128.2</td></tr><tr><td>5.00</td><td>156.2</td><td>157.2</td><td>159.7</td></tr><tr><td>6.00</td><td>188.1</td><td>188.6</td><td>191.9</td></tr><tr><td>7.00</td><td>220.4</td><td>220.7</td><td>223.8</td></tr><tr><td>7.20</td><td>226.8</td><td>227.0</td><td>230.2</td></tr><tr><td>7.92</td><td>250.7</td><td>250.7</td><td>253.6</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	2.9	3.1	3.1	1.00	34.2	35.1	36.4	2.00	63.9	65.0	67.5	3.00	94.4	95.2	97.5	4.00	125.2	126.2	128.2	5.00	156.2	157.2	159.7	6.00	188.1	188.6	191.9	7.00	220.4	220.7	223.8	7.20	226.8	227.0	230.2	7.92	250.7	250.7	253.6	--	—	—	—
Load Current [A]	Input Power [W]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
0.00	2.9	3.1	3.1																																																							
1.00	34.2	35.1	36.4																																																							
2.00	63.9	65.0	67.5																																																							
3.00	94.4	95.2	97.5																																																							
4.00	125.2	126.2	128.2																																																							
5.00	156.2	157.2	159.7																																																							
6.00	188.1	188.6	191.9																																																							
7.00	220.4	220.7	223.8																																																							
7.20	226.8	227.0	230.2																																																							
7.92	250.7	250.7	253.6																																																							
--	—	—	—																																																							

# COSEL

Model		CBS2002428	
Item		Efficiency (by Input Voltage) 効率 (入力電圧特性)	
Object			

1. Graph

Load 50%

Load 100%

Efficiency [%]

<

# COSEL

Model		CBS2002428	
Item	Efficiency (by Load Current) 効率 (負荷特性)		
Object			

1. Graph

—△—

Input Volt.

18V

---□---

Input Volt.

24V

---○---

Input Volt.

36V

Efficiency [%]

100

92

84

76

68

60

52

44

0

2

4

6

8

Load Current [A]

1

2

3

4

5

6

7

8

79.8

86.3

87.8

88.4

88.5

88.3

87.9

87.9

87.5

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.00	—	—	—
1.00	79.8	77.9	74.9
2.00	86.3	84.8	81.7
3.00	87.8	87.0	84.9
4.00	88.4	87.7	86.3
5.00	88.5	88.0	86.6
6.00	88.3	88.1	86.5
7.00	87.9	87.8	86.6
7.20	87.9	87.8	86.6
7.92	87.5	87.5	86.4
--	—	—	—

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。



# COSEL

Model	CBS2002428																																																	
Item	Load Regulation 静的負荷変動	Temperature	25℃																																															
Object	+28V7.2A	Testing Circuitry	Figure A																																															
1. Graph		2. Values																																																
<div><div><div>—△—</div><div>Input Volt. 18V</div></div><div><div>---□---</div><div>Input Volt. 24V</div></div><div><div>-·-○-·-</div><div>Input Volt. 36V</div></div></div> <div>Output Voltage [V]</div> <div>Load Current [A]</div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>0.00</td><td>28.037</td><td>28.033</td><td>28.031</td></tr><tr><td>1.00</td><td>28.036</td><td>28.033</td><td>28.031</td></tr><tr><td>2.00</td><td>28.036</td><td>28.033</td><td>28.032</td></tr><tr><td>3.00</td><td>28.036</td><td>28.033</td><td>28.032</td></tr><tr><td>4.00</td><td>28.036</td><td>28.034</td><td>28.032</td></tr><tr><td>5.00</td><td>28.036</td><td>28.034</td><td>28.033</td></tr><tr><td>6.00</td><td>28.035</td><td>28.034</td><td>28.033</td></tr><tr><td>7.00</td><td>28.035</td><td>28.033</td><td>28.033</td></tr><tr><td>7.20</td><td>28.035</td><td>28.033</td><td>28.033</td></tr><tr><td>7.92</td><td>28.035</td><td>28.033</td><td>28.033</td></tr></table>		Load Current [A]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	28.037	28.033	28.031	1.00	28.036	28.033	28.031	2.00	28.036	28.033	28.032	3.00	28.036	28.033	28.032	4.00	28.036	28.034	28.032	5.00	28.036	28.034	28.033	6.00	28.035	28.034	28.033	7.00	28.035	28.033	28.033	7.20	28.035	28.033	28.033	7.92	28.035	28.033	28.033
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																															
0.00	28.037	28.033	28.031																																															
1.00	28.036	28.033	28.031																																															
2.00	28.036	28.033	28.032																																															
3.00	28.036	28.033	28.032																																															
4.00	28.036	28.034	28.032																																															
5.00	28.036	28.034	28.033																																															
6.00	28.035	28.034	28.033																																															
7.00	28.035	28.033	28.033																																															
7.20	28.035	28.033	28.033																																															
7.92	28.035	28.033	28.033																																															
<div>Note: Slanted line shows the range of the rated load current.</div> <div>(注) 斜線は定格負荷電流範囲を示す。</div>																																																		

# COSEL

Model		CBS2002428	
Item		Ripple Voltage (by Load Current) リップル電圧 (負荷特性)	
Object		+28V7.2A	
1. Graph		2. Values	

—△— Input Volt. 18V  
- -○- - Input Volt. 36V

Load Current [A]	18V Input [mV]	36V Input [mV]
0.0	5	10
1.4	25	30
2.9	25	30
4.3	25	30
5.8	25	30
7.2	25	30
9.2	25	30
--	--	--
--	--	--
--	--	--
--	--	--

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。  
(注) 斜線は定格負荷電流範囲を示す。

Ripple [mVp-p]

Fig. Complex Ripple Wave Form  
図 リップル波形詳細図

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.0	5	10
1.4	25	30
2.9	25	30
4.3	25	30
5.8	25	30
7.2	25	30
9.2	25	30
--	--	--
--	--	--
--	--	--
--	--	--

# COSEL

Model		CBS2002428	
Item		Ripple-Noise リップルノイズ	
Object		+28V7.2A	
1. Graph		2. Values	

—△— Input Volt. 18V  
- -○- - Input Volt. 36V

Load Current [A]	18V Input [mV]	36V Input [mV]
0.0	30	35
1.4	45	60
2.9	45	60
4.3	45	60
5.8	50	55
7.2	50	50
9.2	50	50

Ripple-Noise is shown as p-p in the figure below.  
Note: Slanted line shows the range of the rated load current.

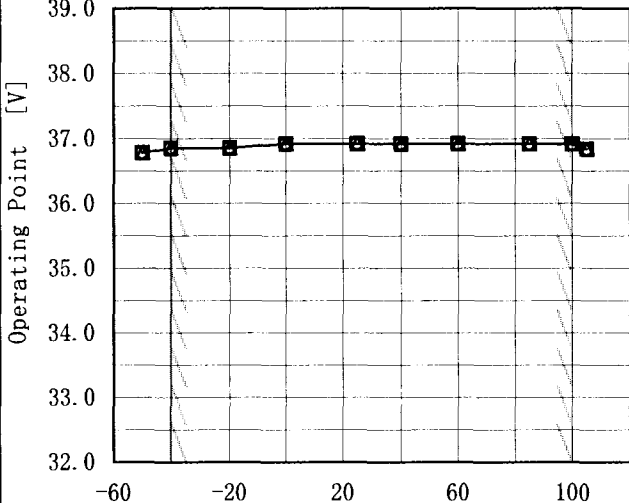
リップルノイズは、下図 p - p 値で示される。  
(注) 斜線は定格負荷電流範囲を示す。

Fig. Complex Ripple Noise Wave Form  
図 リップルノイズ波形

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.0	30	35
1.4	45	60
2.9	45	60
4.3	45	60
5.8	50	55
7.2	50	50
9.2	50	50
--	--	--
--	--	--
--	--	--
--	--	--



# COSEL

Model	CBS2002428																																																						
Item	Overvoltage Protection 過電圧保護	Testing Circuitry      Figure A																																																					
Object	+28V7.2A																																																						
1. Graph		2. Values																																																					
<div><div>—△—</div><div>Input Volt. 18V</div></div> <div><div>---□---</div><div>Input Volt. 24V</div></div> <div><div>---○---</div><div>Input Volt. 36V</div></div>  <p>Operating Point [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 0%</p>		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="3">Operating Point [V]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>-50</td><td>36.78</td><td>36.78</td><td>36.78</td></tr><tr><td>-40</td><td>36.85</td><td>36.85</td><td>36.85</td></tr><tr><td>-20</td><td>36.85</td><td>36.85</td><td>36.85</td></tr><tr><td>0</td><td>36.92</td><td>36.92</td><td>36.92</td></tr><tr><td>25</td><td>36.92</td><td>36.92</td><td>36.92</td></tr><tr><td>40</td><td>36.92</td><td>36.92</td><td>36.92</td></tr><tr><td>60</td><td>36.92</td><td>36.92</td><td>36.92</td></tr><tr><td>85</td><td>36.92</td><td>36.92</td><td>36.92</td></tr><tr><td>100</td><td>36.92</td><td>36.91</td><td>36.91</td></tr><tr><td>105</td><td>36.84</td><td>36.84</td><td>36.84</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr></table>			Ambient Temperature [°C]	Operating Point [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-50	36.78	36.78	36.78	-40	36.85	36.85	36.85	-20	36.85	36.85	36.85	0	36.92	36.92	36.92	25	36.92	36.92	36.92	40	36.92	36.92	36.92	60	36.92	36.92	36.92	85	36.92	36.92	36.92	100	36.92	36.91	36.91	105	36.84	36.84	36.84	--	—	—	—
Ambient Temperature [°C]	Operating Point [V]																																																						
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																				
-50	36.78	36.78	36.78																																																				
-40	36.85	36.85	36.85																																																				
-20	36.85	36.85	36.85																																																				
0	36.92	36.92	36.92																																																				
25	36.92	36.92	36.92																																																				
40	36.92	36.92	36.92																																																				
60	36.92	36.92	36.92																																																				
85	36.92	36.92	36.92																																																				
100	36.92	36.91	36.91																																																				
105	36.84	36.84	36.84																																																				
--	—	—	—																																																				
Note: Slanted line shows the range of the rated ambient temperature.																																																							
(注) 斜線は定格周囲温度範囲を示す。																																																							

# COSEL


Model	CBS2002428	Temperature	25°C
Item	Dynamic Load Response 動的負荷変動	Testing Circuitry	Figure A
Object	+28V7.2A		

Input Volt. 24 V  
Cycle 1000 ms


Load Current

Min. Load (0A)  $\longleftrightarrow$   
Load 100% (7.2A)

500 mV/div

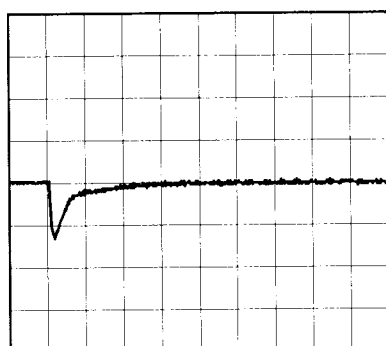


200  $\mu$ s/div

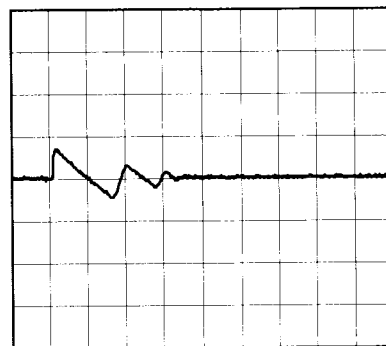


5 ms/div

Min. Load (0A)  $\longleftrightarrow$   
Load 50% (3.6A)

500 mV/div

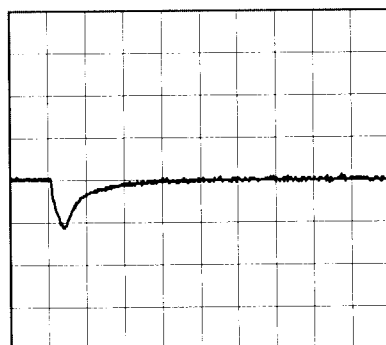


200  $\mu$ s/div

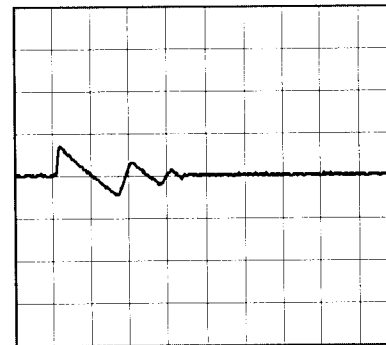


5 ms/div

Load 10% (0.72A)  $\longleftrightarrow$   
Load 100% (7.2A)

500 mV/div

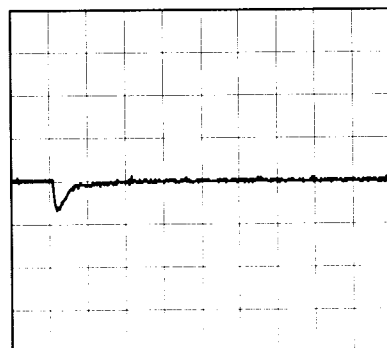

200  $\mu$ s/div

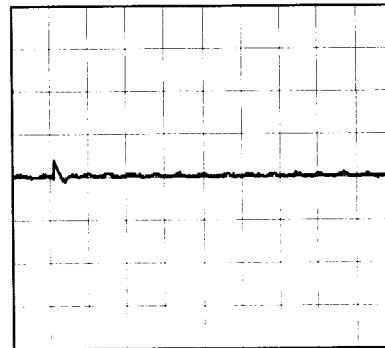


5 ms/div

# COSEL


Model	CBS2002428	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+28V7.2A		

## 1. Graph

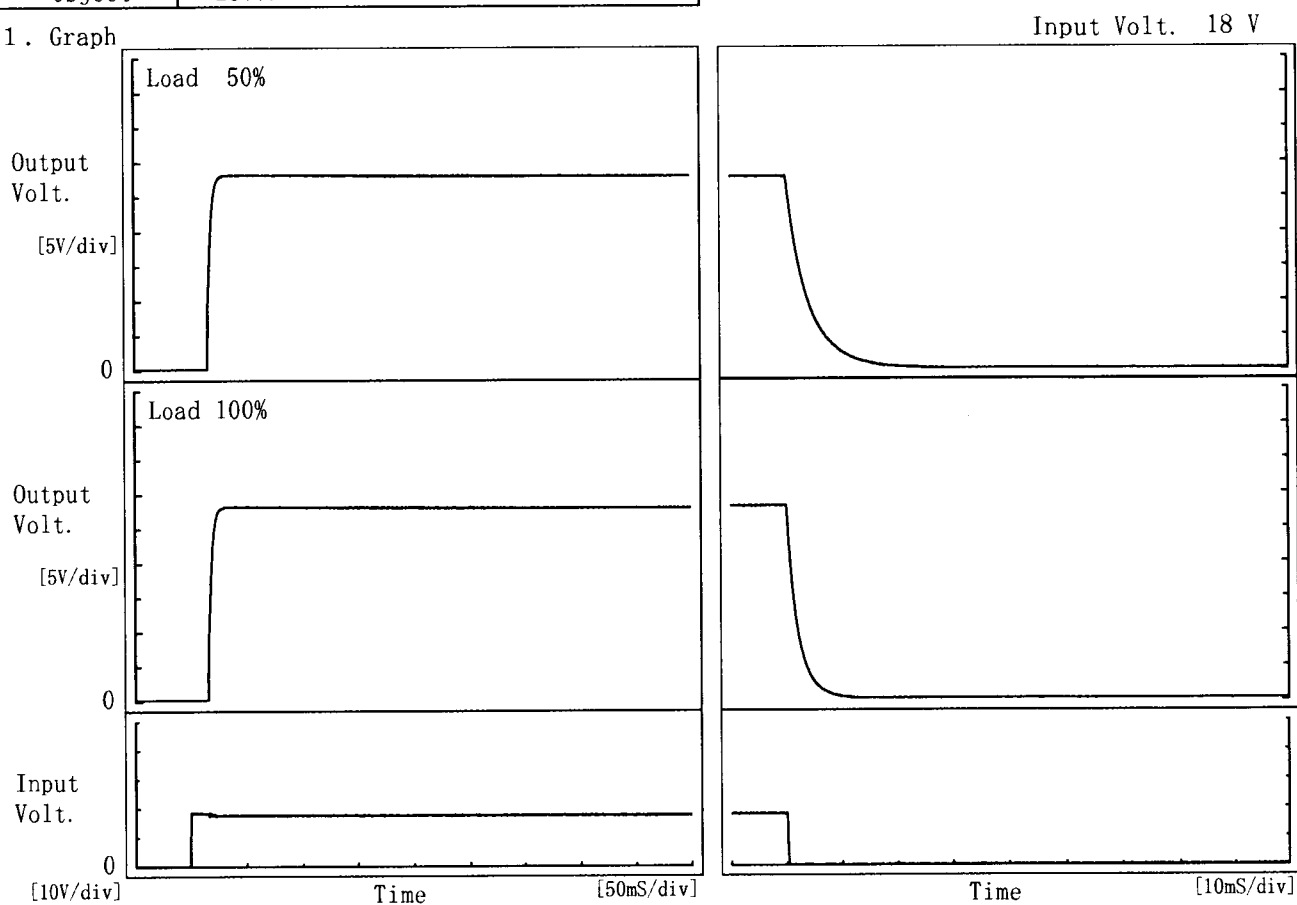

## 2. Values

		[mS]				
Load	Time	T d	T r	T s	T h	T f
50 %		15.3	5.8	21.0	0.4	9.0
100 %		15.3	5.8	21.0	0.3	4.6

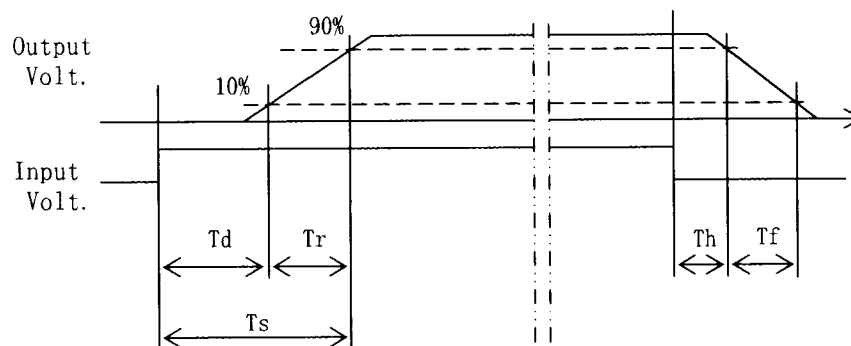

# COSEL

Model		CBS2002428	
Item		Ambient Temperature Drift 周囲温度変動	
Object		+28V7.2A	

1. Graph

—△—

Input Volt. 18V

---□---

Input Volt. 24V

---○---

Input Volt. 36V

Output Voltage [V]

<



# COSEL

# COSEL

Model		CBS2002428	
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)	
Object		+28V7.2A	

1. Graph

---

□

---

Load 50%

—

△


—

Load 100%

Ripple Voltage [mV]

<

# COSEL

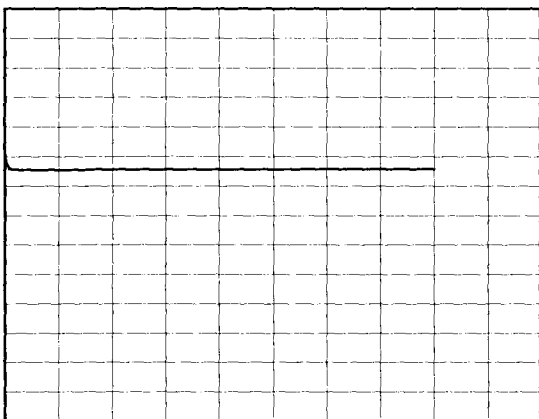Model	CBS2002428																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25℃																						
		Testing Circuitry	Figure A																						
Object	+28V7.2A																								
1. Graph		2. Values																							
<div><div>Output Voltage [V]</div><div><div>Time [H]</div></div><div><div>Input Volt.</div><div>24V</div><div>Load</div><div>100%</div></div></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>28.057</td></tr><tr><td>0.5</td><td>28.027</td></tr><tr><td>1.0</td><td>28.027</td></tr><tr><td>2.0</td><td>28.028</td></tr><tr><td>3.0</td><td>28.028</td></tr><tr><td>4.0</td><td>28.028</td></tr><tr><td>5.0</td><td>28.028</td></tr><tr><td>6.0</td><td>28.029</td></tr><tr><td>7.0</td><td>28.029</td></tr><tr><td>8.0</td><td>28.029</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	28.057	0.5	28.027	1.0	28.027	2.0	28.028	3.0	28.028	4.0	28.028	5.0	28.028	6.0	28.029	7.0	28.029	8.0	28.029
Time since start [H]	Output Voltage [V]																								
0.0	28.057																								
0.5	28.027																								
1.0	28.027																								
2.0	28.028																								
3.0	28.028																								
4.0	28.028																								
5.0	28.028																								
6.0	28.029																								
7.0	28.029																								
8.0	28.029																								

# COSEL

Model		CBS2002428	Testing Circuitry    Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+28V7.2A	

## 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 ~ 100℃

Input Voltage : 18 ~ 36V

Load Current : 0 ~ 7.2A

\* Output Voltage Accuracy =  $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ration) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

## 1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -40 ~ 100℃

入力電圧 : 18 ~ 36V

負荷電流 : 0 ~ 7.2A

\* 定電圧精度(変動値) =  $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

\* 定電圧精度(変動率) =  $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

## 2. Values

Item	Temperature [℃]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-40	36	7.2	28.077	±82	±0.3
Minimum Voltage	100	18	7.2	27.913		

# COSEL

		Testing Circuitry    Figure A
Model	CBS2002428	
Item	Condense 結露特性	
Object	+28V7.2A	

## 1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

## 1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い異常のないことを確認する。

## 2. Values

Item	Data	Testing Conditions
Output Voltage [V]	28.065	Input Volt. : 24V, Load Current. : 7.2A
Line Regulation [mV]	3	Input Volt. : 18~36V, Load Current. : 7.2A
Load Regulation [mV]	1	Input Volt. : 24V, Load Current. : 0~7.2A

**COSEL**

Model	CBS2002428	Temperature	25°C
Item	Line Noise Tolerance 入力雑音耐量	Testing Circuitry	Figure B
Object	+28V7.2A		

## 1. Conditions

- Input Voltage : 24 V
- Pulse Voltage : 2000 V
- Pulse Cycle : 16.7 mS
- Pulse Input Duration : 1 min. or more
- Load : 100 %

## 2. Results

Pulse Width [nS]	MODE		No protection failure should occur	DC-like Regulation of Output Voltage
		POLARITY	保護回路の誤動作がない	出力電圧の直流的変動
50	COMMON	+	OK	no fluctuation
		—	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		—	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		—	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		—	OK	no fluctuation

# COSEL

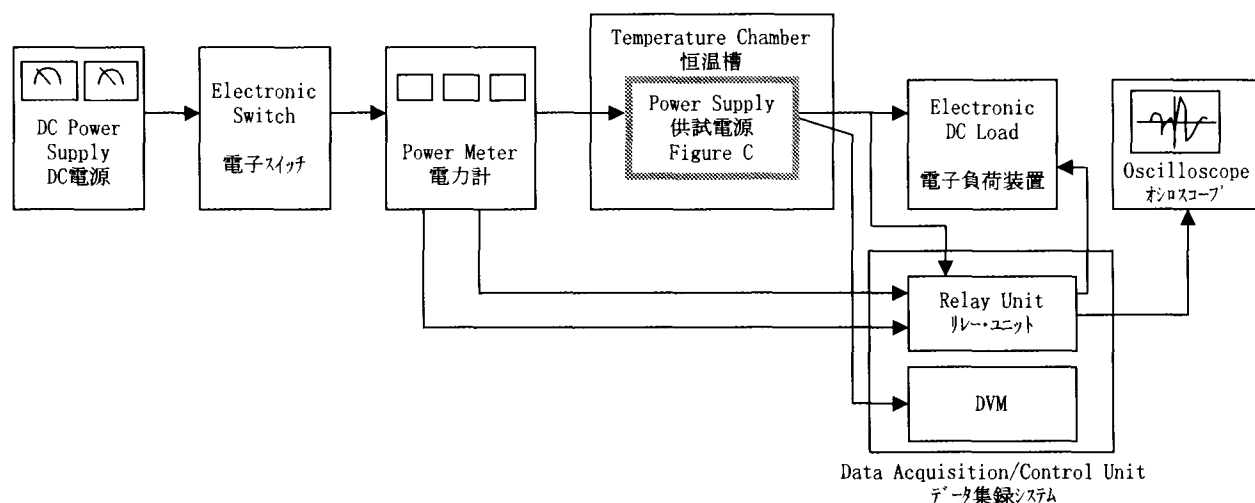


Figure A


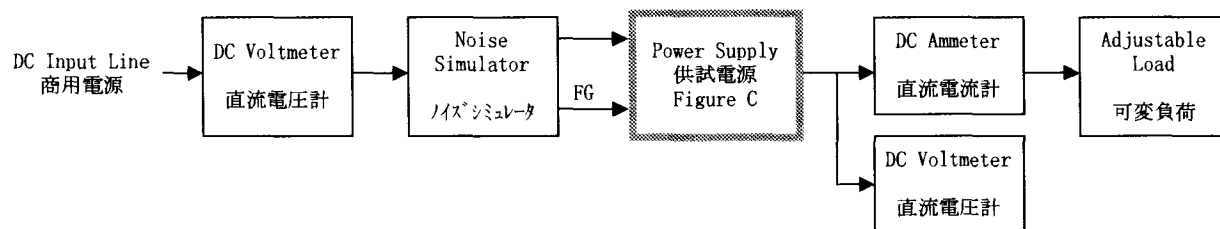


Figure B

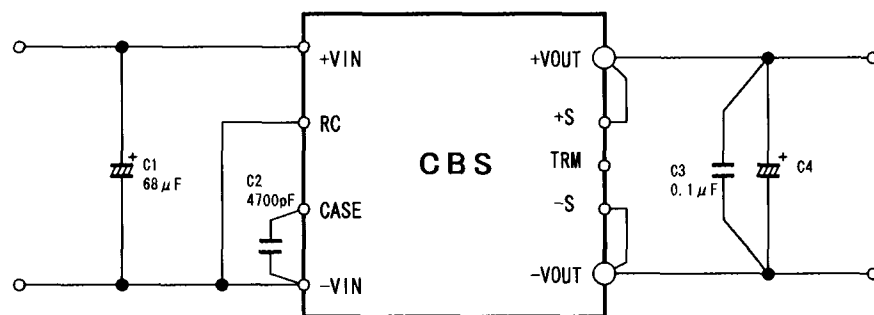

C1 : 50V 68  $\mu$  F  
 C2 : 4700pF  
 C3 : 50V 0.1  $\mu$  F  
 C4 : 35V 470  $\mu$  F  $\times 2$  ( $-40^{\circ}\text{C} \leq T_B \leq -20^{\circ}\text{C}$ )  
       35V 470  $\mu$  F ( $-20^{\circ}\text{C} < T_B \leq 100^{\circ}\text{C}$ )  
 $T_B$  : Base Plate Temp.

Figure C