

TEST DATA OF PLA30F-12

Regulated DC Power Supply
June 24, 2014

Approved by : Yoshiaki Shimizu
Yoshiaki Shimizu Design Manager

Prepared by : Yuhei Sugimori
Yuhei Sugimori Design Engineer


COSEL CO.,LTD.

CONTENTS

1.Input Current (by Load Current)	1
2.Input Power (by Load Current)	2
3.Efficiency (by Input Voltage)	3
4.Efficiency (by Load Current)	4
5.Power Factor (by Input Voltage)	5
6.Power Factor (by Load Current)	6
7.Inrush Current	7
8.Leakage Current	8
9.Line Regulation	9
10.Load Regulation	10
11.Dynamic Load Response	11
12.Ripple Voltage (by Load Current)	12
13.Ripple-Noise	13
14.Ripple Voltage (by Ambient Temperature)	14
15.Ambient Temperature Drift	15
16.Output Voltage Accuracy	16
17.Time Lapse Drift	17
18.Rise and Fall Time	18
19.Hold-Up Time	19
20.Instantaneous Interruption Compensation	20
21.Minimum Input Voltage for Regulated Output Voltage	21
22.Overcurrent Protection	22
23.Overvoltage Protection	23
24.Figure of Testing Circuitry	24

(Final Page 25)

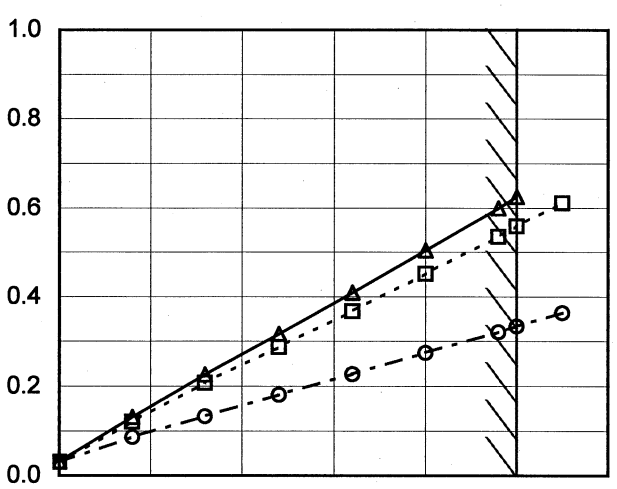

Model		PLA30F-12		Temperature 25°C																																																				
Item		Input Current (by Load Current)		Testing Circuitry Figure A																																																				
Object																																																								
1.Graph		<div><div>—△—</div>Input Volt. 100V</div> <div><div>---□---</div>Input Volt. 115V</div> <div><div>---○---</div>Input Volt. 230V</div>		2.Values																																																				
<div><div><div>Input Current [A]</div><div></div><div>Load Current [A]</div></div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 115[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>0.032</td><td>0.030</td><td>0.030</td></tr><tr><td>0.40</td><td>0.131</td><td>0.121</td><td>0.086</td></tr><tr><td>0.80</td><td>0.226</td><td>0.207</td><td>0.133</td></tr><tr><td>1.20</td><td>0.317</td><td>0.287</td><td>0.181</td></tr><tr><td>1.60</td><td>0.410</td><td>0.368</td><td>0.227</td></tr><tr><td>2.00</td><td>0.504</td><td>0.452</td><td>0.274</td></tr><tr><td>2.40</td><td>0.600</td><td>0.535</td><td>0.321</td></tr><tr><td>2.50</td><td>0.626</td><td>0.559</td><td>0.334</td></tr><tr><td>2.75</td><td>-</td><td>0.612</td><td>0.364</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Current [A]			Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]	0.00	0.032	0.030	0.030	0.40	0.131	0.121	0.086	0.80	0.226	0.207	0.133	1.20	0.317	0.287	0.181	1.60	0.410	0.368	0.227	2.00	0.504	0.452	0.274	2.40	0.600	0.535	0.321	2.50	0.626	0.559	0.334	2.75	-	0.612	0.364	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																							
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]																																																					
0.00	0.032	0.030	0.030																																																					
0.40	0.131	0.121	0.086																																																					
0.80	0.226	0.207	0.133																																																					
1.20	0.317	0.287	0.181																																																					
1.60	0.410	0.368	0.227																																																					
2.00	0.504	0.452	0.274																																																					
2.40	0.600	0.535	0.321																																																					
2.50	0.626	0.559	0.334																																																					
2.75	-	0.612	0.364																																																					
--	-	-	-																																																					
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								



Model		PLA30F-12		Temperature Testing Circuitry	25°C Figure A																																																	
Item		Input Power (by Load Current)																																																				
Object		_____																																																				
1.Graph		<div><div>—△—</div>Input Volt. 100V</div> <div><div>---□---</div>Input Volt. 115V</div> <div><div>---○---</div>Input Volt. 230V</div>		2.Values																																																		
<div><div>Input Power [W]</div><div>Load Current [A]</div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 115[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>1.16</td><td>1.19</td><td>1.65</td></tr><tr><td>0.40</td><td>6.50</td><td>6.46</td><td>7.64</td></tr><tr><td>0.80</td><td>12.37</td><td>12.37</td><td>13.00</td></tr><tr><td>1.20</td><td>18.09</td><td>18.03</td><td>18.71</td></tr><tr><td>1.60</td><td>23.90</td><td>23.76</td><td>24.30</td></tr><tr><td>2.00</td><td>29.84</td><td>29.60</td><td>29.90</td></tr><tr><td>2.40</td><td>35.85</td><td>35.49</td><td>35.50</td></tr><tr><td>2.50</td><td>37.32</td><td>36.93</td><td>36.90</td></tr><tr><td>2.75</td><td>-</td><td>40.67</td><td>40.40</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Power [W]			Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]	0.00	1.16	1.19	1.65	0.40	6.50	6.46	7.64	0.80	12.37	12.37	13.00	1.20	18.09	18.03	18.71	1.60	23.90	23.76	24.30	2.00	29.84	29.60	29.90	2.40	35.85	35.49	35.50	2.50	37.32	36.93	36.90	2.75	-	40.67	40.40	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]																																																			
0.00	1.16	1.19	1.65																																																			
0.40	6.50	6.46	7.64																																																			
0.80	12.37	12.37	13.00																																																			
1.20	18.09	18.03	18.71																																																			
1.60	23.90	23.76	24.30																																																			
2.00	29.84	29.60	29.90																																																			
2.40	35.85	35.49	35.50																																																			
2.50	37.32	36.93	36.90																																																			
2.75	-	40.67	40.40																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						




Model PLA30F-12

Item Efficiency (by Input Voltage)

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph

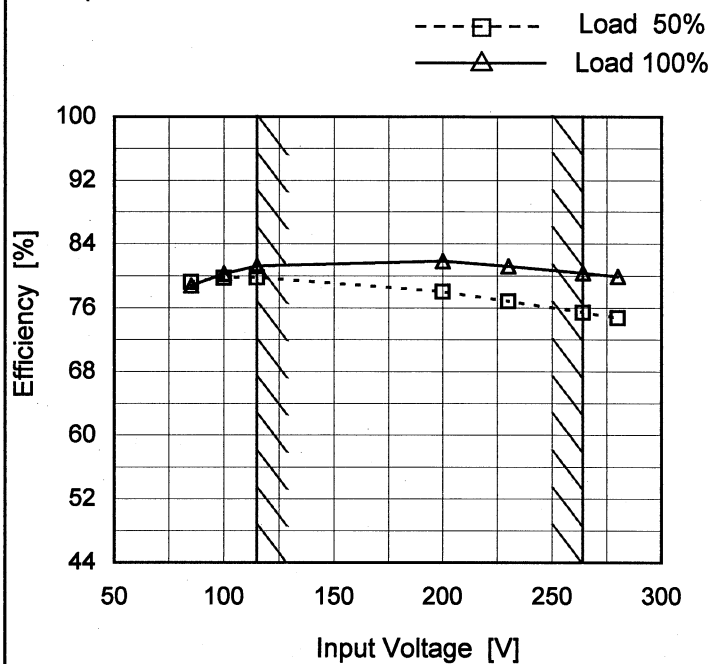

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
85	79.3	78.8 ※1
100	79.8	80.3 ※2
115	79.8	81.3
200	78.1	81.9
230	76.8	81.2
264	75.4	80.3
280	74.8	79.9
--	-	-
--	-	-

※1: Load 80%

※2: Load 90%



Model		PLA30F-12	
Item		Efficiency (by Load Current)	
Object			

1.Graph

—△—

Input Volt.

100V

---□---

Input Volt.

115V

---○---

Input Volt.

230V

Efficiency [%]

100

92

84

76

68

60

52

44

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

Load Current [A]

Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Efficiency [%]		
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]
0.00	-	-	-
0.40	72.8	73.2	61.7
0.80	77.0	77.0	73.3
1.20	79.3	79.5	76.6
1.60	80.1	80.5	78.8
2.00	80.3	81.0	80.2
2.40	80.3	81.1	81.1
2.50	80.3	81.3	81.2
2.75	-	81.0	81.6
--	-	-	-
--	-	-	-



Model		PLA30F-12	Temperature Testing Circuitry	25°C Figure A																																
Item		Power Factor (by Input Voltage)																																		
Object																																				
1.Graph			2.Values																																	
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <table><thead><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Power Factor</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>85</td><td>0.597</td><td>0.620 ※1</td></tr><tr><td>100</td><td>0.572</td><td>0.595 ※2</td></tr><tr><td>115</td><td>0.548</td><td>0.576</td></tr><tr><td>200</td><td>0.465</td><td>0.492</td></tr><tr><td>230</td><td>0.451</td><td>0.480</td></tr><tr><td>264</td><td>0.432</td><td>0.458</td></tr><tr><td>280</td><td>0.425</td><td>0.452</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table> <div>※1:Load 80%</div> <div>※2:Load 90%</div>			Input Voltage [V]	Power Factor		Load 50%	Load 100%	85	0.597	0.620 ※1	100	0.572	0.595 ※2	115	0.548	0.576	200	0.465	0.492	230	0.451	0.480	264	0.432	0.458	280	0.425	0.452	--	-	-	--	-	-		
Input Voltage [V]	Power Factor																																			
	Load 50%	Load 100%																																		
85	0.597	0.620 ※1																																		
100	0.572	0.595 ※2																																		
115	0.548	0.576																																		
200	0.465	0.492																																		
230	0.451	0.480																																		
264	0.432	0.458																																		
280	0.425	0.452																																		
--	-	-																																		
--	-	-																																		
Note: Slanted line shows the range of the rated input voltage.																																				




Model		PLA30F-12		Temperature 25°C Testing Circuitry Figure A																																																		
Item		Power Factor (by Load Current)																																																				
Object		_____																																																				
1.Graph		<div><div>—△—</div>Input Volt. 100V</div> <div><div>---□---</div>Input Volt. 115V</div> <div><div>---○---</div>Input Volt. 230V</div>		2.Values																																																		
<div><div><div>Power Factor</div><div>0.8</div><div>0.7</div><div>0.6</div><div>0.5</div><div>0.4</div><div>0.3</div><div>0.2</div></div><div><div>0.0</div><div>1.0</div><div>2.0</div><div>3.0</div></div><div><div>Load Current [A]</div></div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Power Factor</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 115[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>0.365</td><td>0.339</td><td>0.242</td></tr><tr><td>0.40</td><td>0.495</td><td>0.466</td><td>0.385</td></tr><tr><td>0.80</td><td>0.547</td><td>0.519</td><td>0.426</td></tr><tr><td>1.20</td><td>0.571</td><td>0.546</td><td>0.450</td></tr><tr><td>1.60</td><td>0.584</td><td>0.561</td><td>0.466</td></tr><tr><td>2.00</td><td>0.592</td><td>0.570</td><td>0.474</td></tr><tr><td>2.40</td><td>0.598</td><td>0.577</td><td>0.481</td></tr><tr><td>2.50</td><td>0.597</td><td>0.576</td><td>0.480</td></tr><tr><td>2.75</td><td>-</td><td>0.579</td><td>0.483</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Power Factor			Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]	0.00	0.365	0.339	0.242	0.40	0.495	0.466	0.385	0.80	0.547	0.519	0.426	1.20	0.571	0.546	0.450	1.60	0.584	0.561	0.466	2.00	0.592	0.570	0.474	2.40	0.598	0.577	0.481	2.50	0.597	0.576	0.480	2.75	-	0.579	0.483	--	-	-	-	--	-	-	-
Load Current [A]	Power Factor																																																					
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]																																																			
0.00	0.365	0.339	0.242																																																			
0.40	0.495	0.466	0.385																																																			
0.80	0.547	0.519	0.426																																																			
1.20	0.571	0.546	0.450																																																			
1.60	0.584	0.561	0.466																																																			
2.00	0.592	0.570	0.474																																																			
2.40	0.598	0.577	0.481																																																			
2.50	0.597	0.576	0.480																																																			
2.75	-	0.579	0.483																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

COSEL

Model	PLA30F-12	Temperature	25°C
Item	Inrush Current	Testing Circuitry	Figure A
Object	_____		

Input
Current
[20A/div]

Input
Voltage
[100V/div]

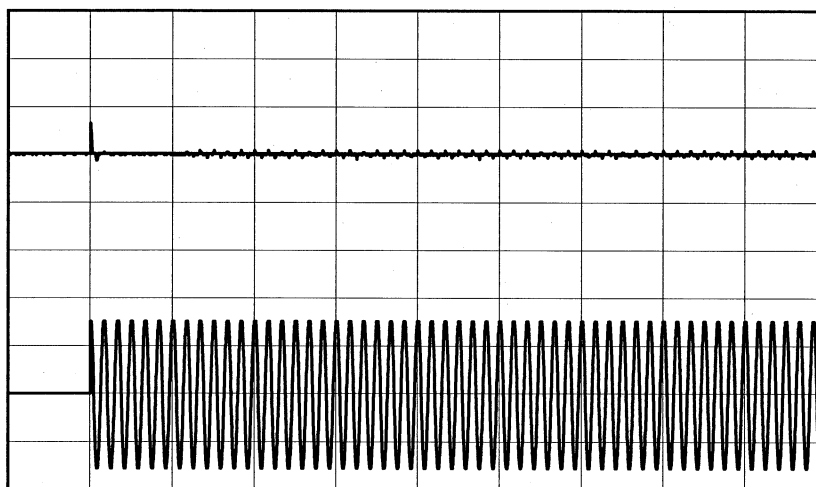

Time

[100ms/div]

Input Voltage 115 V

Frequency 60 Hz


Load 100 %

Primary inrush current :
13.0 A

Secondary inrush current :
2.0 A

Input
Current
[20A/div]

Input
Voltage
[200V/div]

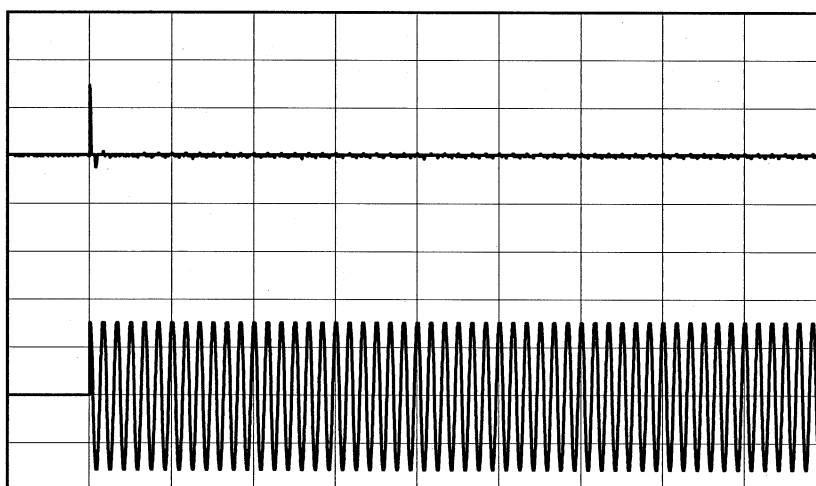

Time

[100ms/div]

Input Voltage 230 V

Frequency 60 Hz


Load 100 %

Primary inrush current :
29.2 A

Secondary inrush current :
1.4 A

Primary inrush current

Secondary inrush current

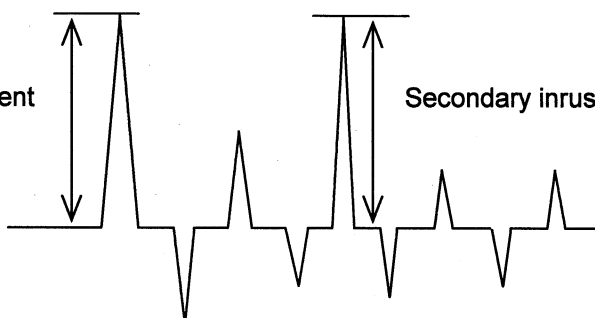



COSEL		Temperature 25°C Testing Circuitry Figure B
Model	PLA30F-12	
Item	Leakage Current	
Object	_____	

1.Results

[mA]

Standards		Input Volt.			Note
		100 [V]	115 [V]	240 [V]	
DEN-AN	Both phases	0.09	0.11	0.24	Operation
	One of phases	0.18	0.20	0.46	Stand by
IEC60950-1	Both phases	0.12	0.14	0.29	Operation
	One of phases	0.18	0.20	0.44	Stand by

The value for "One of phases" is the reference value only.

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

COSEL

Model		PLA30F-12	
Item		Line Regulation	
Object		+12V2.5A	

1.Graph

Load 50%

Load 100%

Output Voltage [V]

</


BC-10830

COSEL

Model		PLA30F-12	Temperature 25°C Testing Circuitry Figure A
Item		Dynamic Load Response	
Object		+12V2.5A	

Input Volt. 115 V
Cycle 1000 ms

Response. $t_1=t_2=50\mu\text{s}$. Typ

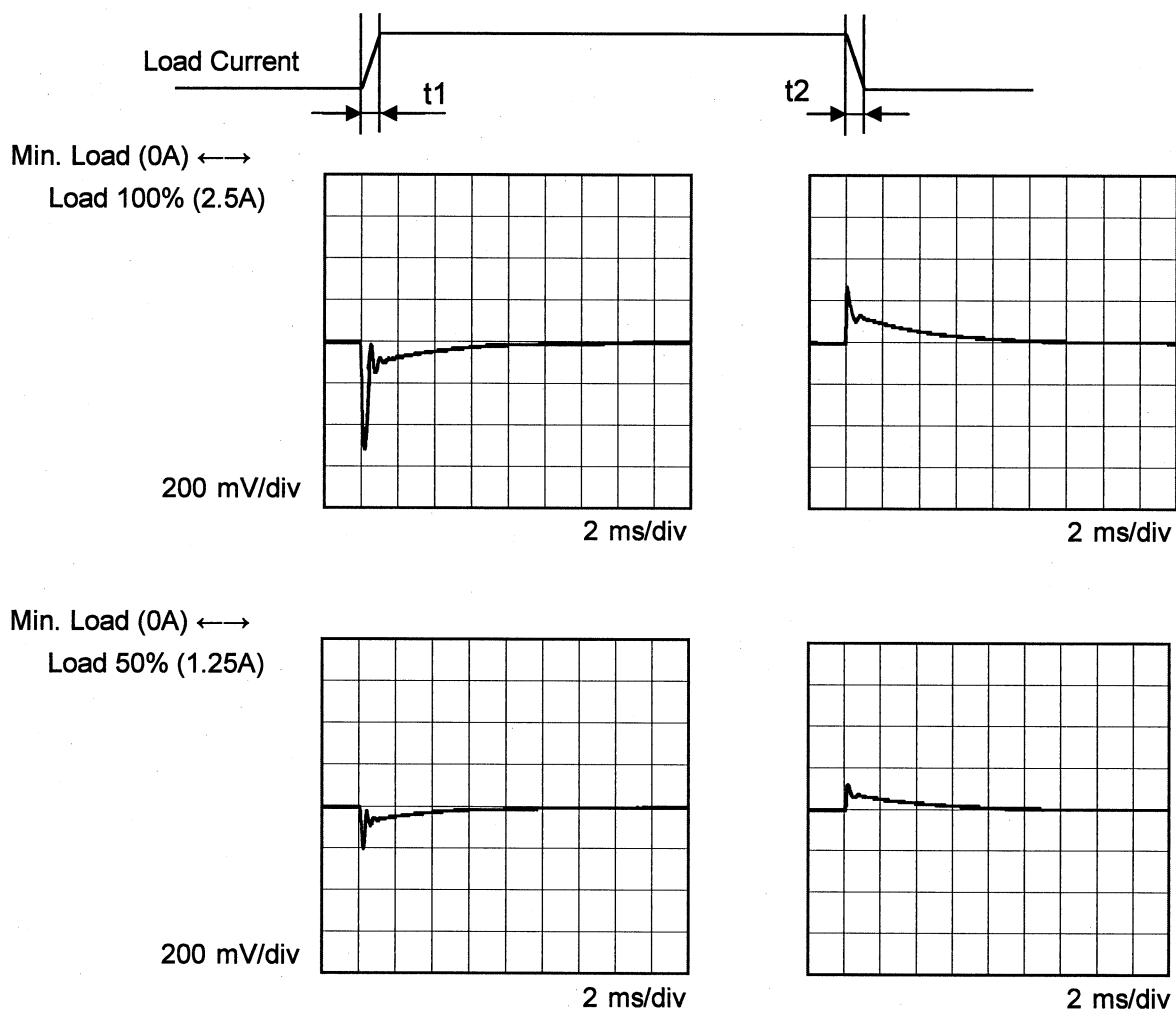

COSEL

Model

PLA30F-12

Item

Ripple Voltage (by Load Current)


Object

+12V2.5A

Temperature
Testing Circuitry

25°C
Figure C

1. Graph

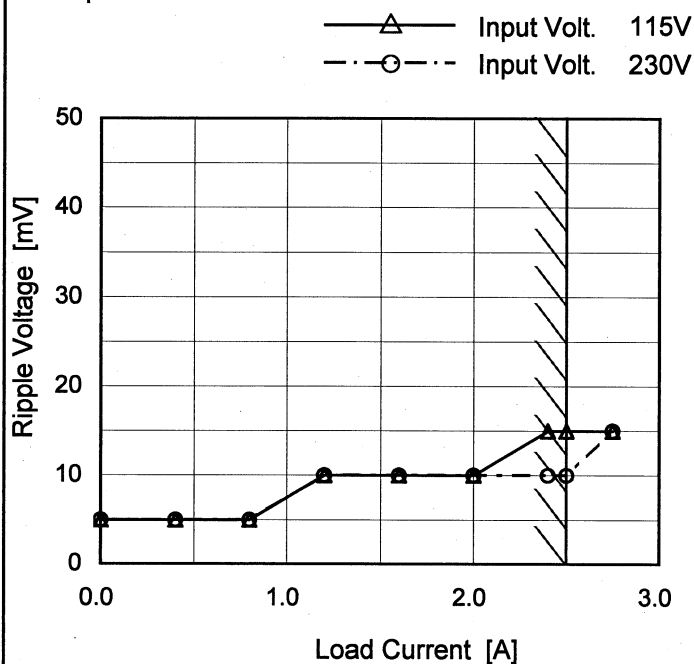

Measured by 20 MHz Oscilloscope.

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 115 [V]	Input Volt. 230 [V]
0.00	5	5
0.40	5	5
0.80	5	5
1.20	10	10
1.60	10	10
2.00	10	10
2.40	15	10
2.50	15	10
2.75	15	15
--	-	-
--	-	-

T1: Due to AC Input Line
T2: Due to Switching

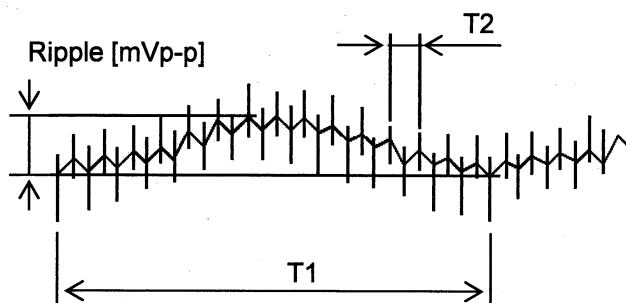


Fig. Complex Ripple Wave Form

COSEL

Model		PLA30F-12	
Item		Ripple-Noise	
Object		+12V2.5A	

1.Graph

—△—

Input Volt. 115V

---○---

Input Volt. 230V

100

90

80

70

60

50

40

30

20

10

0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0

0.0

1.0

2.0

3.0


0.0

1.0

<

Testing Circuitry Figure C

2.Values

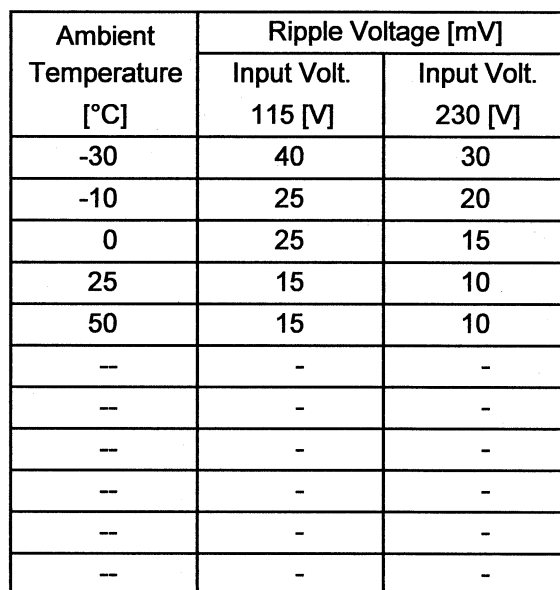

Note: Slanted line shows the range of the rated ambient temperature.



Model		PLA30F-12																																																				
Item		Ambient Temperature Drift																																																				
Object		+12V2.5A																																																				
1.Graph		<div><div><div>—△—</div>Input Volt. 100V</div><div><div>---□---</div>Input Volt. 115V</div><div><div>---○---</div>Input Volt. 230V</div></div> <div><p>Output Voltage [V]</p><p>Ambient Temperature [°C]</p><p>Note: Slanted line shows the range of the rated ambient temperature.</p></div>																																																				
2.Values		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 115[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>-20</td><td>12.050</td><td>12.049</td><td>12.050</td></tr><tr><td>-10</td><td>12.047</td><td>12.047</td><td>12.047</td></tr><tr><td>0</td><td>12.043</td><td>12.043</td><td>12.043</td></tr><tr><td>10</td><td>12.041</td><td>12.040</td><td>12.040</td></tr><tr><td>20</td><td>12.041</td><td>12.041</td><td>12.041</td></tr><tr><td>25</td><td>12.040</td><td>12.040</td><td>12.040</td></tr><tr><td>30</td><td>12.038</td><td>12.038</td><td>12.038</td></tr><tr><td>40</td><td>12.033</td><td>12.032</td><td>12.033</td></tr><tr><td>50</td><td>12.026</td><td>12.025</td><td>12.025</td></tr><tr><td>60</td><td>12.016</td><td>12.016</td><td>12.016</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table> <p>Note: In case of Input Volt. 100V, Load 90%. Other case Load 100%.</p>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]	-20	12.050	12.049	12.050	-10	12.047	12.047	12.047	0	12.043	12.043	12.043	10	12.041	12.040	12.040	20	12.041	12.041	12.041	25	12.040	12.040	12.040	30	12.038	12.038	12.038	40	12.033	12.032	12.033	50	12.026	12.025	12.025	60	12.016	12.016	12.016	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]																																																			
-20	12.050	12.049	12.050																																																			
-10	12.047	12.047	12.047																																																			
0	12.043	12.043	12.043																																																			
10	12.041	12.040	12.040																																																			
20	12.041	12.041	12.041																																																			
25	12.040	12.040	12.040																																																			
30	12.038	12.038	12.038																																																			
40	12.033	12.032	12.033																																																			
50	12.026	12.025	12.025																																																			
60	12.016	12.016	12.016																																																			
--	-	-	-																																																			

COSEL

		Testing Circuitry Figure A
Model	PLA30F-12	
Item	Output Voltage Accuracy	
Object	+12V2.5A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10 - 50°C

Input Voltage : 115 - 264V

Load Current : 0 - 2.5A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	-10	264	0	12.052	±18	±0.2
Minimum Voltage	50	115	2.5	12.016		



Model		PLA30F-12	
Item		Time Lapse Drift	
Object		+12V2.5A	

1.Graph

Output Voltage [V]

12.75

12.50

12.25

12.00

11.75

11.50

11.25

11.00

0

2

4

6

8

10

Time [H]

Input Volt.230V

Load100%

2.Values


Time since start [H]	Output Voltage [V]
0.0	12.037
0.5	12.036
1.0	12.036
2.0	12.036
3.0	12.036
4.0	12.036
5.0	12.036
6.0	12.036
7.0	12.036
8.0	12.036

* The characteristic of AC115V is equal.

COSEL


Model	PLA30F-12	Temperature	25°C
Item	Rise and Fall Time	Testing Circuitry	Figure A
Object	+12V2.5A		

1.Graph

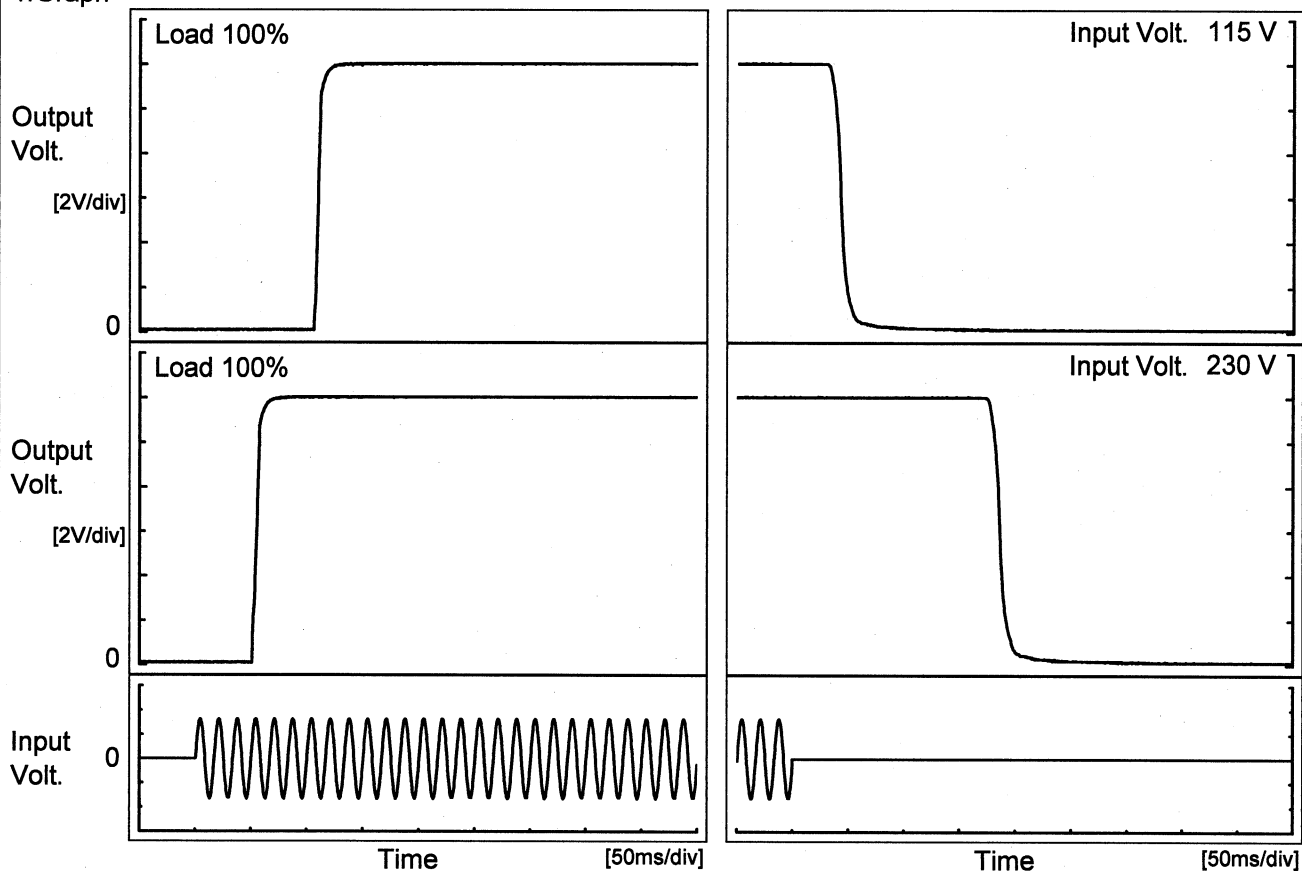


2.Values

Input Volt. \ Time	Td	Tr	Ts	Th	Tf
115 V	107.5	5.8	113.3	36.5	14.5
230 V	51.5	7.0	58.5	180.0	15.0

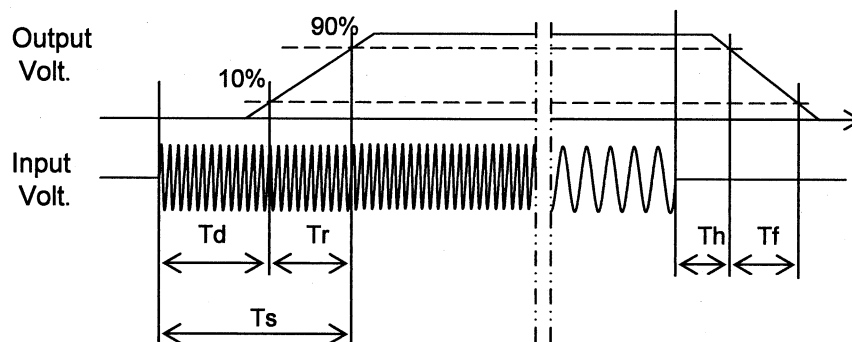

Temperature 25°C
Testing Circuitry Figure A

2.Values

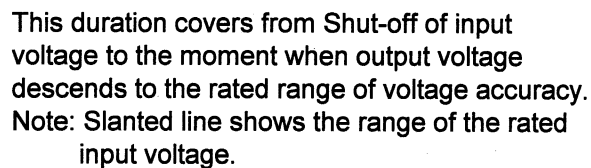

※1 : Load 80%
※2 : Load 90%

COSEL

Model		PLA30F-12	
Item		Instantaneous Interruption Compensation	
Object		+12V2.5A	
1.Graph		2.Values	

Instantaneous Compensation Time [ms]

10000

1000

100

10

1

0.0

1.0

2.0

3.0

Load Current [A]

—△—

Input Volt. 100V

---□---

Input Volt. 115V

---○---

Input Volt. 230V

Load Current [A]	Time [ms]		
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]
0.00	-	-	-
0.40	180	245	993
0.80	95	129	552
1.20	63	86	380
1.60	45	63	287
2.00	34	48	230
2.40	23	40	188
2.50	22	37	180
2.75	-	27	158
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated load current.

COSEL

Model

PLA30F-12

Item


Minimum Input Voltage
for Regulated Output Voltage

Object

+12V2.5A

Testing Circuitry Figure A

1. Graph

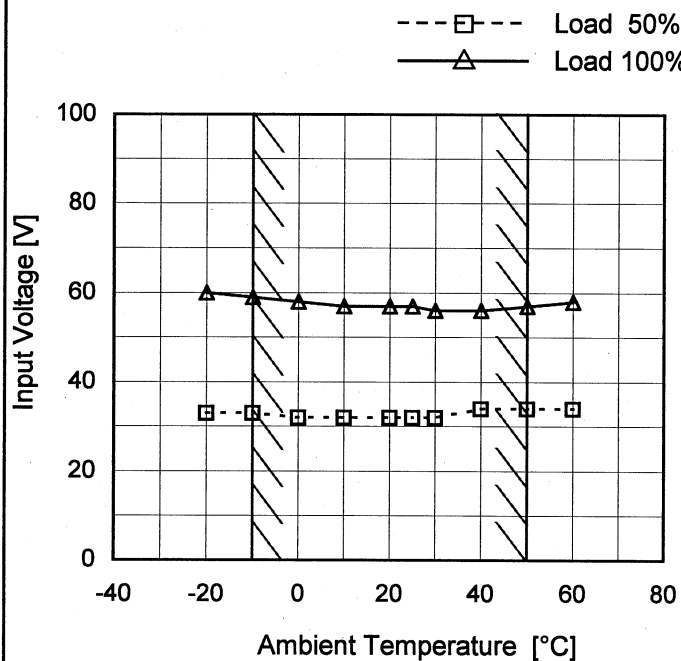

Note: Slanted line shows the range of the rated ambient temperature.

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	33	60
-10	33	59
0	32	58
10	32	57
20	32	57
25	32	57
30	32	56
40	34	56
50	34	57
60	34	58
--	-	-

COSEL

Model		PLA30F-12	
Item		Overcurrent Protection	
Object		+12V2.5A	

1.Graph

Input Volt. 115V

Input Volt. 230V

Output Voltage [V]


Model PLA30F-12

Item Overvoltage Protection

Object +12V2.5A

Testing Circuitry Figure A

1. Graph

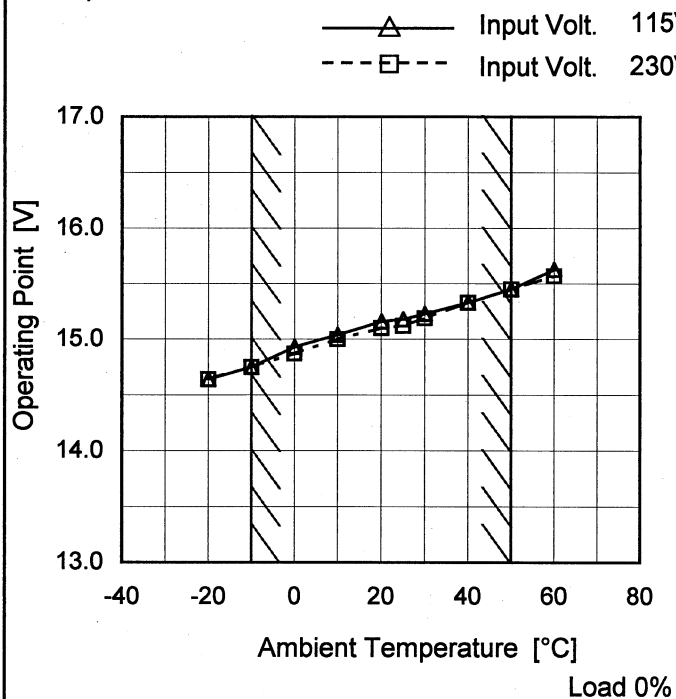

Note: Slanted line shows the range of the rated ambient temperature.

2. Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 115[V]	Input Volt. 230[V]
-20	14.64	14.64
-10	14.75	14.75
0	14.93	14.87
10	15.04	15.00
20	15.16	15.10
25	15.18	15.12
30	15.23	15.19
40	15.33	15.33
50	15.45	15.45
60	15.63	15.57
--	-	-

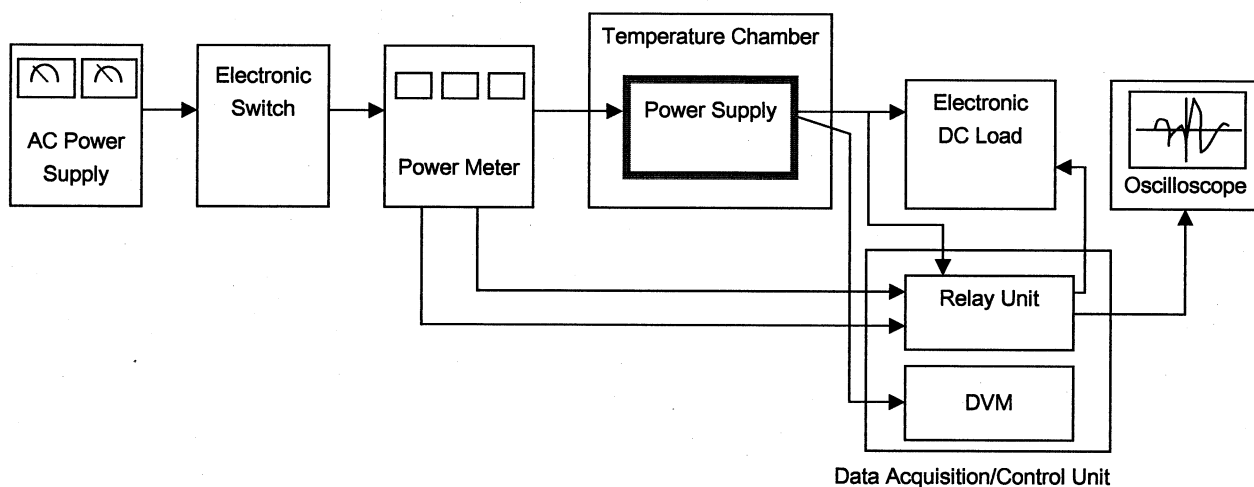


Figure A

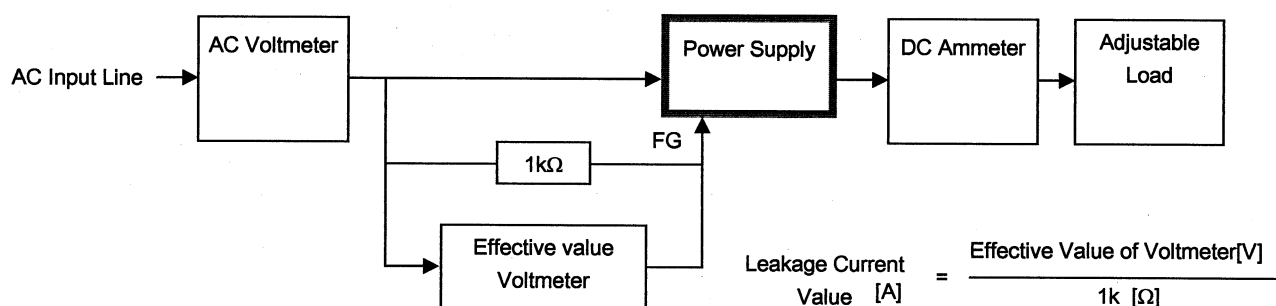


Figure B (DEN-AN)

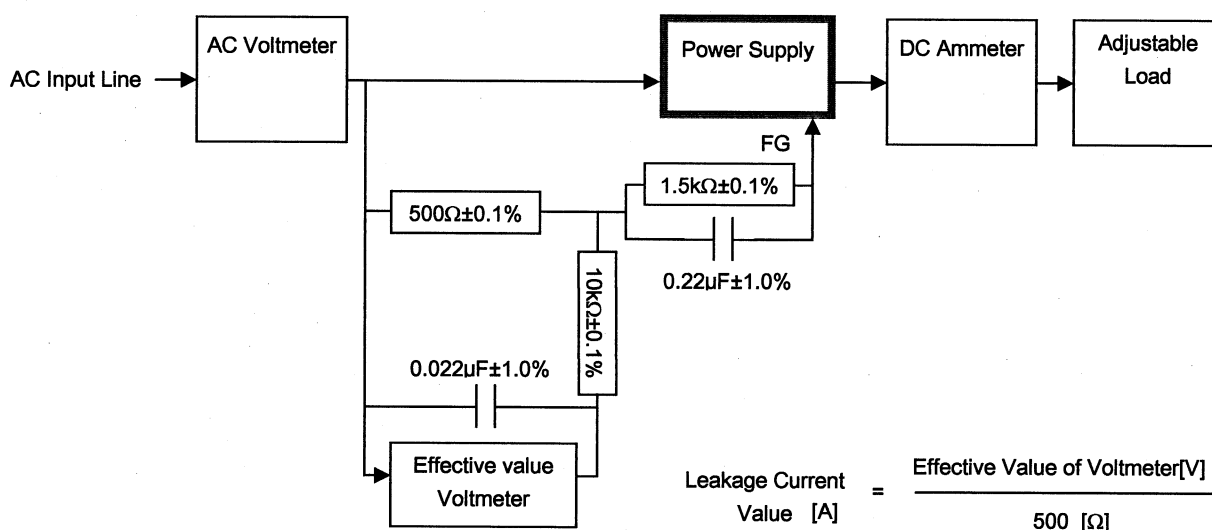


Figure B (IEC60950-1)

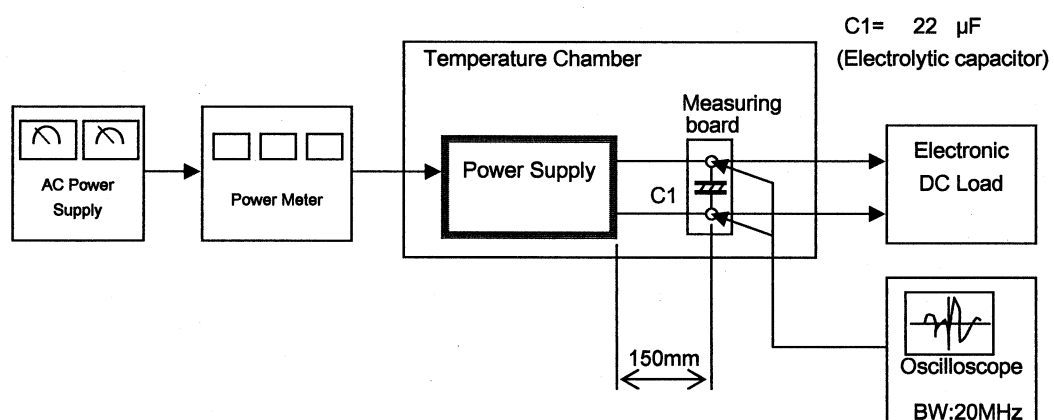


Figure C