



TEST DATA OF CBS1004812

(48V INPUT)

Regulated DC Power Supply
Feb. 21, 2001

Approved by : Takayuki Fukuda
Takayuki Fukuda Design Manager

Prepared by : Atsushi Yoshiyama
Atsushi Yoshiyama Design Engineer

コーセル株式会社
COSEL CO.,LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Input Voltage)	2
入力電流 (入力電圧特性)	
3. Input Current (by Load Current)	3
入力電流 (負荷特性)	
4. Input Power (by Load Current)	4
入力電力 (負荷特性)	
5. Efficiency (by Input Voltage)	5
効率 (入力電圧特性)	
6. Efficiency (by Load Current)	6
効率 (負荷特性)	
7. Load Regulation	7
静的負荷変動	
8. Ripple Voltage (by Load Current)	8
リップル電圧 (負荷特性)	
9. Ripple-Noise	9
リップルノイズ	
10. Overcurrent Protection	10
過電流保護	
11. Overvoltage Protection	11
過電圧保護	
12. Dynamic Load Response	12
動的負荷変動	
13. Rise and Fall Time	13
立上り、立下り時間	
14. Ambient Temperature Drift	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature)	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift	17
経時ドリフト	
18. Output Voltage Accuracy	18
定電圧精度	
19. Condensation	19
結露特性	
20. Line Noise Tolerance	20
入力雑音耐量	
21. Figure of Testing Circuitry	21
測定回路図	

(Final Page 21)

COSEL

Model		CBS1004812	
Item		Line Regulation 静の入力変動	
Object		+12V8.4A	

1. Graph

---□---

Load 50%

—△—

Load 100%

Output Voltage [V]

12.40

12.30

12.20

12.10

12.00

11.90

11.80

11.70


20

40

60

80

Input Voltage [V]

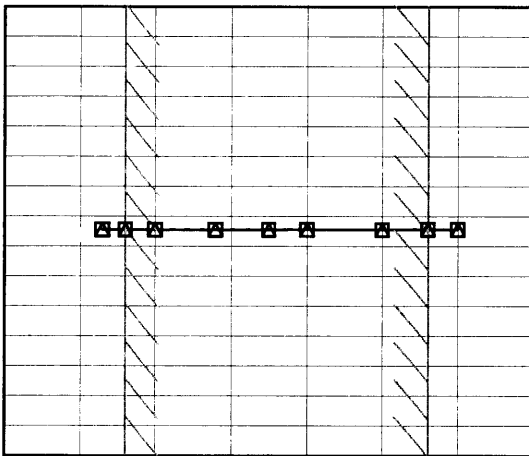

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
33	12.078	12.077
36	12.078	12.078
40	12.078	12.078
48	12.078	12.078
55	12.078	12.078
60	12.078	12.078
70	12.078	12.078
76	12.078	12.078
80	12.078	12.078

COSEL

Model		CBS1004812	
Item	Input Current (by Input Voltage) 入力電流 (入力電圧特性)		
Object			

1. Graph

—△—

Load 100%

---□---

Load 50%

---○---

Load 0%

Input Current [A]

5.0

4.0

3.0

2.0

1.0

0.0

0

20

40

60

80

Input Voltage [V]

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

Temperature	25℃
Testing Circuitry	Figure A

2. Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
8.0	0.000	0.000	0.000
16.0	0.000	0.000	0.000
24.0	0.009	0.009	0.009
30.6	0.069	1.741	3.482
31.4	0.067	1.874	3.692
33.0	0.064	1.760	3.482
36.0	0.058	1.593	3.158
40.0	0.054	1.426	2.826
48.0	0.037	1.188	2.346
60.0	0.031	0.960	1.880
70.0	0.030	0.830	1.614
76.0	0.029	0.770	1.491
80.0	0.029	0.735	1.419
--	—	—	—
--	—	—	—
--	—	—	—

COSEL

Model		CBS1004812	
Item	Input Current (by Load Current) 入力電流 (負荷特性)		
Object			

1. Graph

—△—

Input Volt.

36V

---□---

Input Volt.

48V

---○---

Input Volt.

76V

Input Current [A]

5.0

4.0

3.0

2.0

1.0

0.0

0

2

4

6

8

10

Load Current [A]

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

Load Current [A]	Input Current [A]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
0.0	0.058	0.038	0.029
1.5	0.621	0.463	0.313
3.0	1.158	0.863	0.565
4.5	1.703	1.269	0.820
6.0	2.264	1.682	1.079
7.5	2.836	2.108	1.342
8.4	3.184	2.364	1.502
9.3	3.540	2.625	1.664
--	-	-	-
--	-	-	-
--	-	-	-

2. Values

COSEL

ModelCBS1004812		Temperature25℃																																																				
Item	Input Power (by Load Current) 入力電力 (負荷特性)	Testing Circuitry	Figure A																																																			
Object																																																						
1. Graph		2. Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>---□---</div><div>Input Volt.</div><div>48V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>76V</div></div></div> <div><div><div>Input Power [W]</div><div>200</div><div>150</div><div>100</div><div>50</div><div>0</div></div><div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div></div><div><div>Load Current [A]</div></div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div><div>(注) 斜線は定格負荷電流範囲を示す。</div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>0.0</td><td>2.2</td><td>1.8</td><td>2.3</td></tr><tr><td>1.5</td><td>22.4</td><td>22.2</td><td>23.9</td></tr><tr><td>3.0</td><td>41.6</td><td>41.2</td><td>43.0</td></tr><tr><td>4.5</td><td>60.9</td><td>60.7</td><td>62.4</td></tr><tr><td>6.0</td><td>81.0</td><td>80.4</td><td>82.1</td></tr><tr><td>7.5</td><td>101.2</td><td>100.7</td><td>101.9</td></tr><tr><td>8.4</td><td>113.5</td><td>112.8</td><td>114.0</td></tr><tr><td>9.3</td><td>126.0</td><td>125.3</td><td>126.3</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Power [W]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	2.2	1.8	2.3	1.5	22.4	22.2	23.9	3.0	41.6	41.2	43.0	4.5	60.9	60.7	62.4	6.0	81.0	80.4	82.1	7.5	101.2	100.7	101.9	8.4	113.5	112.8	114.0	9.3	126.0	125.3	126.3	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.0	2.2	1.8	2.3																																																			
1.5	22.4	22.2	23.9																																																			
3.0	41.6	41.2	43.0																																																			
4.5	60.9	60.7	62.4																																																			
6.0	81.0	80.4	82.1																																																			
7.5	101.2	100.7	101.9																																																			
8.4	113.5	112.8	114.0																																																			
9.3	126.0	125.3	126.3																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			


COSEL

Model		CBS1004812		Temperature		25℃																																																																	
Item		Efficiency (by Input Voltage) 効率 (入力電圧特性)		Testing Circuitry		Figure A																																																																	
Object																																																																							
1. Graph				2. Values																																																																			
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <table><thead><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>33</td><td>87.2</td><td>88.4</td></tr><tr><td>36</td><td>88.1</td><td>88.8</td></tr><tr><td>40</td><td>88.3</td><td>89.2</td></tr><tr><td>48</td><td>88.2</td><td>89.3</td></tr><tr><td>55</td><td>87.9</td><td>89.1</td></tr><tr><td>60</td><td>87.2</td><td>89.0</td></tr><tr><td>70</td><td>86.3</td><td>88.7</td></tr><tr><td>76</td><td>85.7</td><td>88.4</td></tr><tr><td>80</td><td>85.4</td><td>88.1</td></tr></tbody></table>				Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	33	87.2	88.4	36	88.1	88.8	40	88.3	89.2	48	88.2	89.3	55	87.9	89.1	60	87.2	89.0	70	86.3	88.7	76	85.7	88.4	80	85.4	88.1	<table><thead><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>33</td><td>87.2</td><td>88.4</td></tr><tr><td>36</td><td>88.1</td><td>88.8</td></tr><tr><td>40</td><td>88.3</td><td>89.2</td></tr><tr><td>48</td><td>88.2</td><td>89.3</td></tr><tr><td>55</td><td>87.9</td><td>89.1</td></tr><tr><td>60</td><td>87.2</td><td>89.0</td></tr><tr><td>70</td><td>86.3</td><td>88.7</td></tr><tr><td>76</td><td>85.7</td><td>88.4</td></tr><tr><td>80</td><td>85.4</td><td>88.1</td></tr></tbody></table>				Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	33	87.2	88.4	36	88.1	88.8	40	88.3	89.2	48	88.2	89.3	55	87.9	89.1	60	87.2	89.0	70	86.3	88.7	76	85.7	88.4	80	85.4	88.1
Input Voltage [V]	Efficiency [%]																																																																						
	Load 50%	Load 100%																																																																					
33	87.2	88.4																																																																					
36	88.1	88.8																																																																					
40	88.3	89.2																																																																					
48	88.2	89.3																																																																					
55	87.9	89.1																																																																					
60	87.2	89.0																																																																					
70	86.3	88.7																																																																					
76	85.7	88.4																																																																					
80	85.4	88.1																																																																					
Input Voltage [V]	Efficiency [%]																																																																						
	Load 50%	Load 100%																																																																					
33	87.2	88.4																																																																					
36	88.1	88.8																																																																					
40	88.3	89.2																																																																					
48	88.2	89.3																																																																					
55	87.9	89.1																																																																					
60	87.2	89.0																																																																					
70	86.3	88.7																																																																					
76	85.7	88.4																																																																					
80	85.4	88.1																																																																					
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																																																							

COSEL

Model		CBS1004812		Temperature		25℃																																																				
Item		Efficiency (by Load Current) 効率 (負荷特性)		Testing Circuitry		Figure A																																																				
Object																																																										
1. Graph				2. Values																																																						
<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>---□---</div><div>Input Volt.</div><div>48V</div></div><div><div>---○---</div><div>Input Volt.</div><div>76V</div></div></div> <table><thead><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr></thead><tbody><tr><td>0.0</td><td>—</td><td>—</td><td>—</td></tr><tr><td>1.5</td><td>79.0</td><td>79.5</td><td>73.9</td></tr><tr><td>3.0</td><td>86.0</td><td>86.7</td><td>83.1</td></tr><tr><td>4.5</td><td>88.4</td><td>88.7</td><td>86.2</td></tr><tr><td>6.0</td><td>88.8</td><td>89.4</td><td>87.5</td></tr><tr><td>7.5</td><td>88.9</td><td>89.4</td><td>88.3</td></tr><tr><td>8.4</td><td>88.8</td><td>89.4</td><td>88.4</td></tr><tr><td>9.3</td><td>88.6</td><td>89.2</td><td>88.4</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr></tbody></table> <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>				Load Current [A]	Efficiency [%]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	—	—	—	1.5	79.0	79.5	73.9	3.0	86.0	86.7	83.1	4.5	88.4	88.7	86.2	6.0	88.8	89.4	87.5	7.5	88.9	89.4	88.3	8.4	88.8	89.4	88.4	9.3	88.6	89.2	88.4	--	—	—	—	--	—	—	—	--	—	—	—				
Load Current [A]	Efficiency [%]																																																									
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																							
0.0	—	—	—																																																							
1.5	79.0	79.5	73.9																																																							
3.0	86.0	86.7	83.1																																																							
4.5	88.4	88.7	86.2																																																							
6.0	88.8	89.4	87.5																																																							
7.5	88.9	89.4	88.3																																																							
8.4	88.8	89.4	88.4																																																							
9.3	88.6	89.2	88.4																																																							
--	—	—	—																																																							
--	—	—	—																																																							
--	—	—	—																																																							

COSEL

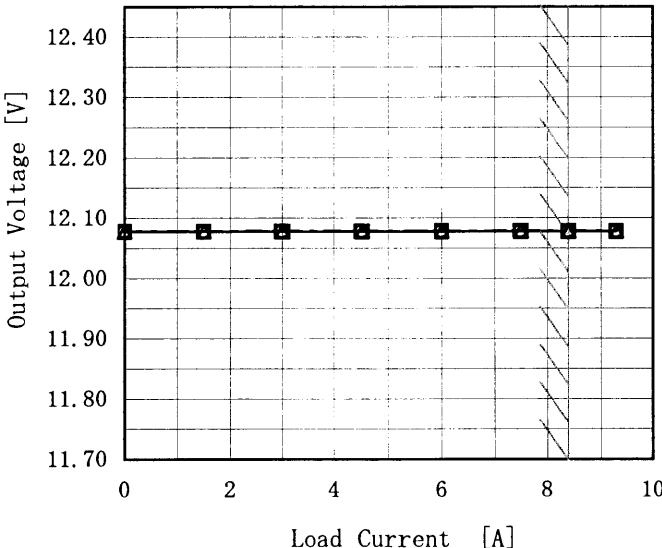Model	CBS1004812																																																	
Item	Load Regulation 静的負荷変動	Temperature	25℃																																															
Object	+12V8.4A	Testing Circuitry	Figure A																																															
1. Graph		2. Values																																																
<div><div><div>—△—</div><div>Input Volt. 36V</div></div><div><div>---□---</div><div>Input Volt. 48V</div></div><div><div>-·-○-·-</div><div>Input Volt. 76V</div></div></div>  <div>Note: Slanted line shows the range of the rated load current. (注) 斜線は定格負荷電流範囲を示す。</div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>0.0</td><td>12.078</td><td>12.078</td><td>12.078</td></tr><tr><td>1.5</td><td>12.078</td><td>12.078</td><td>12.078</td></tr><tr><td>3.0</td><td>12.078</td><td>12.078</td><td>12.078</td></tr><tr><td>4.5</td><td>12.078</td><td>12.078</td><td>12.079</td></tr><tr><td>6.0</td><td>12.078</td><td>12.078</td><td>12.079</td></tr><tr><td>7.5</td><td>12.078</td><td>12.078</td><td>12.079</td></tr><tr><td>8.4</td><td>12.078</td><td>12.078</td><td>12.079</td></tr><tr><td>9.3</td><td>12.078</td><td>12.078</td><td>12.079</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	12.078	12.078	12.078	1.5	12.078	12.078	12.078	3.0	12.078	12.078	12.078	4.5	12.078	12.078	12.079	6.0	12.078	12.078	12.079	7.5	12.078	12.078	12.079	8.4	12.078	12.078	12.079	9.3	12.078	12.078	12.079	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																															
0.0	12.078	12.078	12.078																																															
1.5	12.078	12.078	12.078																																															
3.0	12.078	12.078	12.078																																															
4.5	12.078	12.078	12.079																																															
6.0	12.078	12.078	12.079																																															
7.5	12.078	12.078	12.079																																															
8.4	12.078	12.078	12.079																																															
9.3	12.078	12.078	12.079																																															
--	-	-	-																																															
--	-	-	-																																															

COSEL

Model		CBS1004812	
Item		Ripple Voltage (by Load Current) リップル電圧 (負荷特性)	
Object		+12V8.4A	

1. Graph

—△— Input Volt. 36V

- - ○ - - Input Volt. 76V

50

40

30

20

10

0

Ripple Voltage [mV]

0

2

4

6

8

10

Load Current [A]

<

COSEL

Model		CBS1004812	
Item		Ripple-Noise リップルノイズ	
Object		+12V8.4A	

1. Graph

—△—

Input Volt. 36V

- -○- -

Input Volt. 76V

200

180

160

140

120

100

80

60

40

20

0

Ripple-Noise [mV]

0

2

4

6

8

10


Load Current [A]

COSEL


Model	CBS1004812																																																													
Item	Overcurrent Protection 過電流保護	Temperature	25℃																																																											
Object	+12V8.4A	Testing Circuitry	Figure A																																																											
1. Graph		2. Values																																																												
<div><div><div>—————</div><div>Input Volt. 36V</div></div><div><div>—————</div><div>Input Volt. 48V</div></div><div><div>—————</div><div>Input Volt. 76V</div></div></div> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current. (注) 斜線は定格負荷電流範囲を示す。</p> <p>Intermittent operation occurs when the output voltage is from 8.4V to 0V. 8.4V～0V間は、間欠モードとなる。</p>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>12.0</td><td>11.19</td><td>11.05</td><td>11.25</td></tr><tr><td>11.4</td><td>11.24</td><td>11.07</td><td>11.31</td></tr><tr><td>10.8</td><td>11.23</td><td>11.09</td><td>11.37</td></tr><tr><td>9.6</td><td>11.22</td><td>11.13</td><td>11.47</td></tr><tr><td>8.4</td><td>11.20</td><td>11.17</td><td>11.63</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr></table>		Output Voltage [V]	Load Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	12.0	11.19	11.05	11.25	11.4	11.24	11.07	11.31	10.8	11.23	11.09	11.37	9.6	11.22	11.13	11.47	8.4	11.20	11.17	11.63	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Output Voltage [V]	Load Current [A]																																																													
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																											
12.0	11.19	11.05	11.25																																																											
11.4	11.24	11.07	11.31																																																											
10.8	11.23	11.09	11.37																																																											
9.6	11.22	11.13	11.47																																																											
8.4	11.20	11.17	11.63																																																											
--	--	--	--																																																											
--	--	--	--																																																											
--	--	--	--																																																											
--	--	--	--																																																											
--	--	--	--																																																											
--	--	--	--																																																											
--	--	--	--																																																											
--	--	--	--																																																											

B C - 3 3 2 9

COSEL

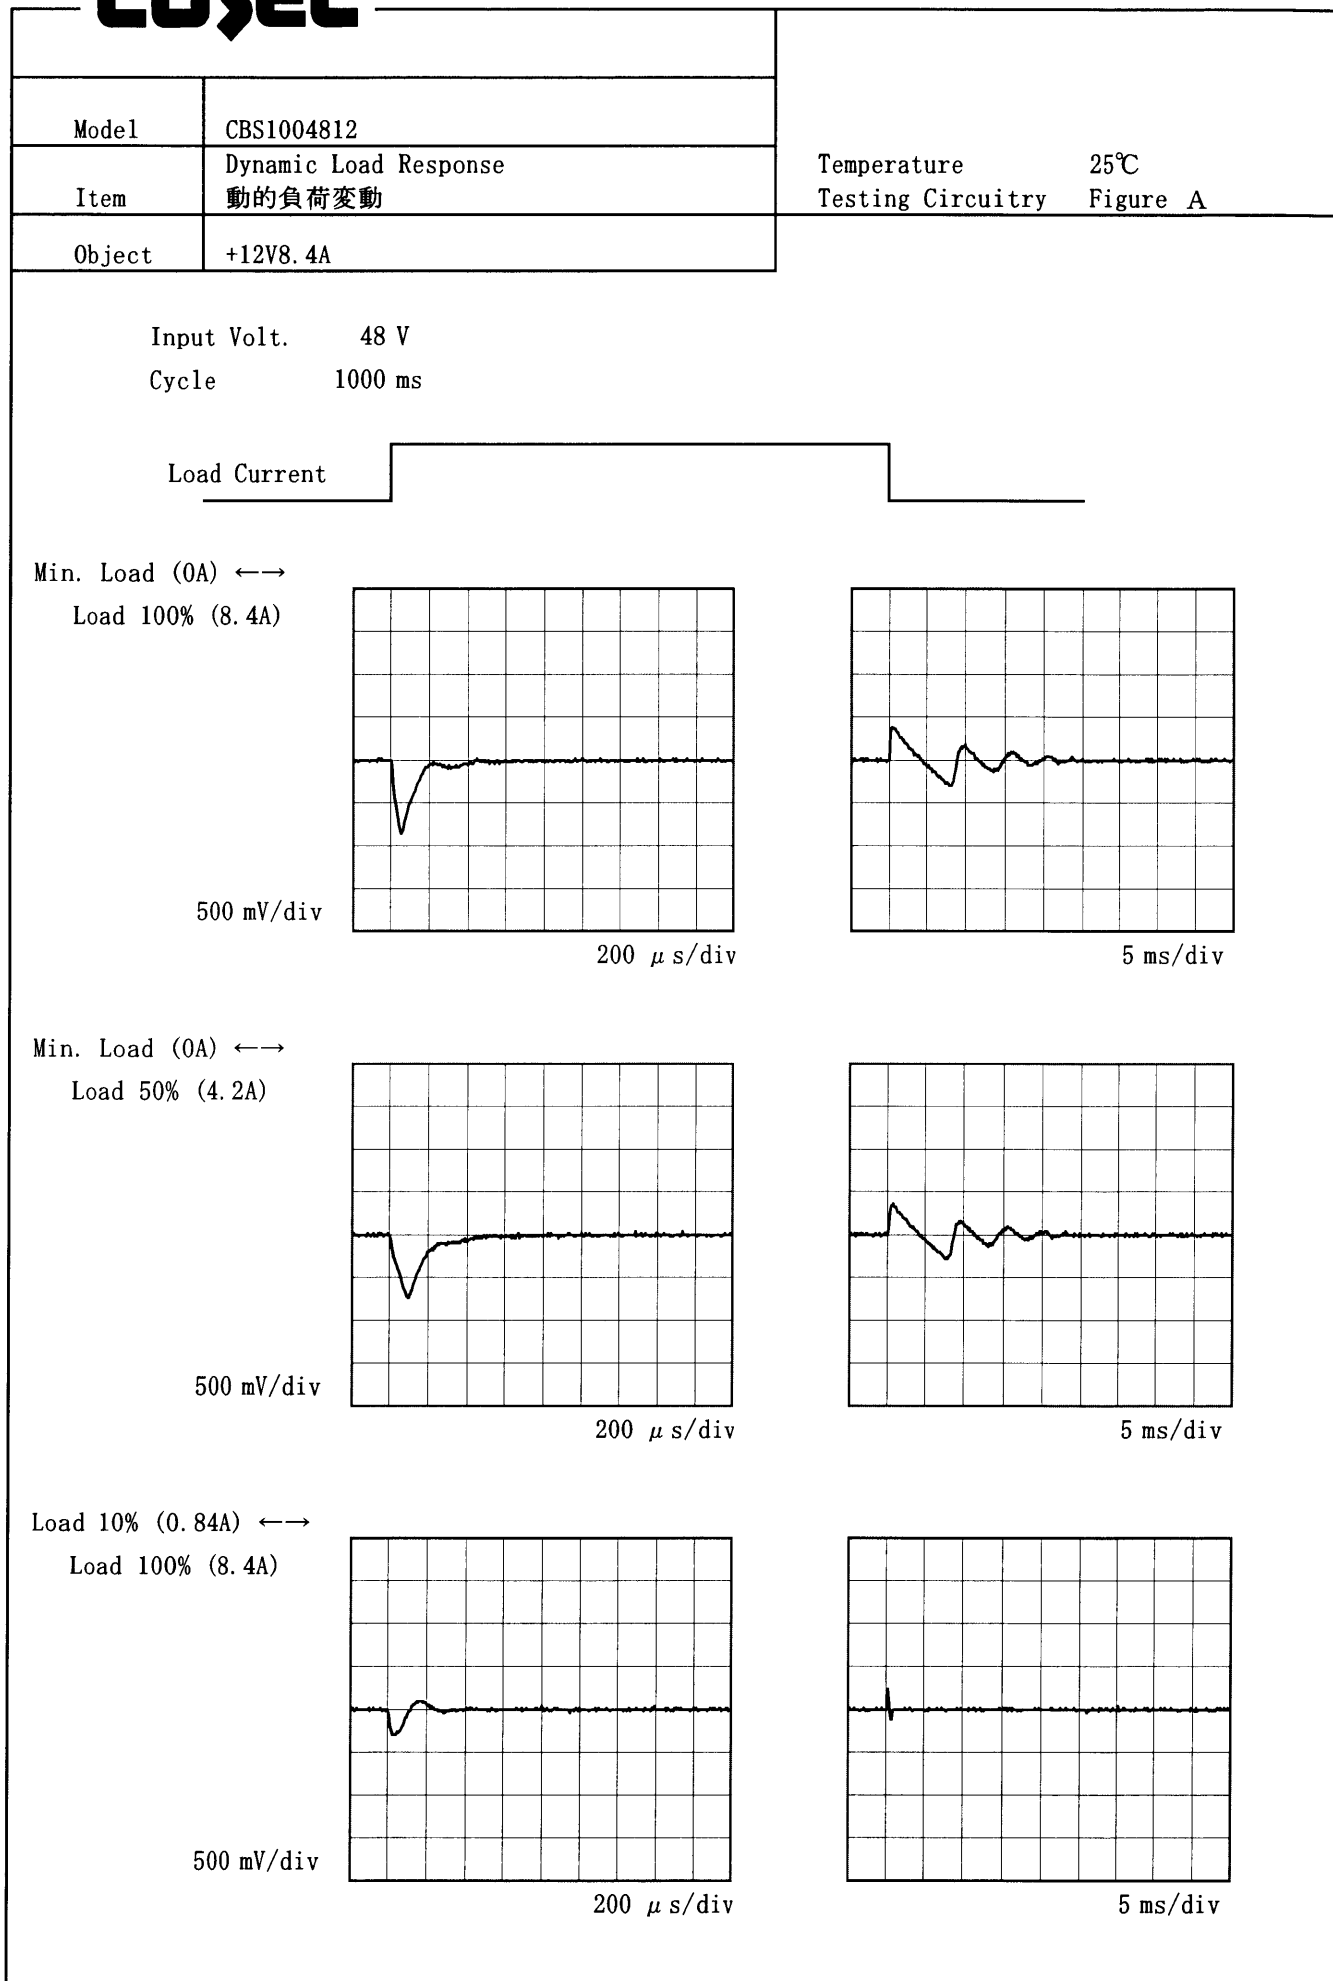

COSEL

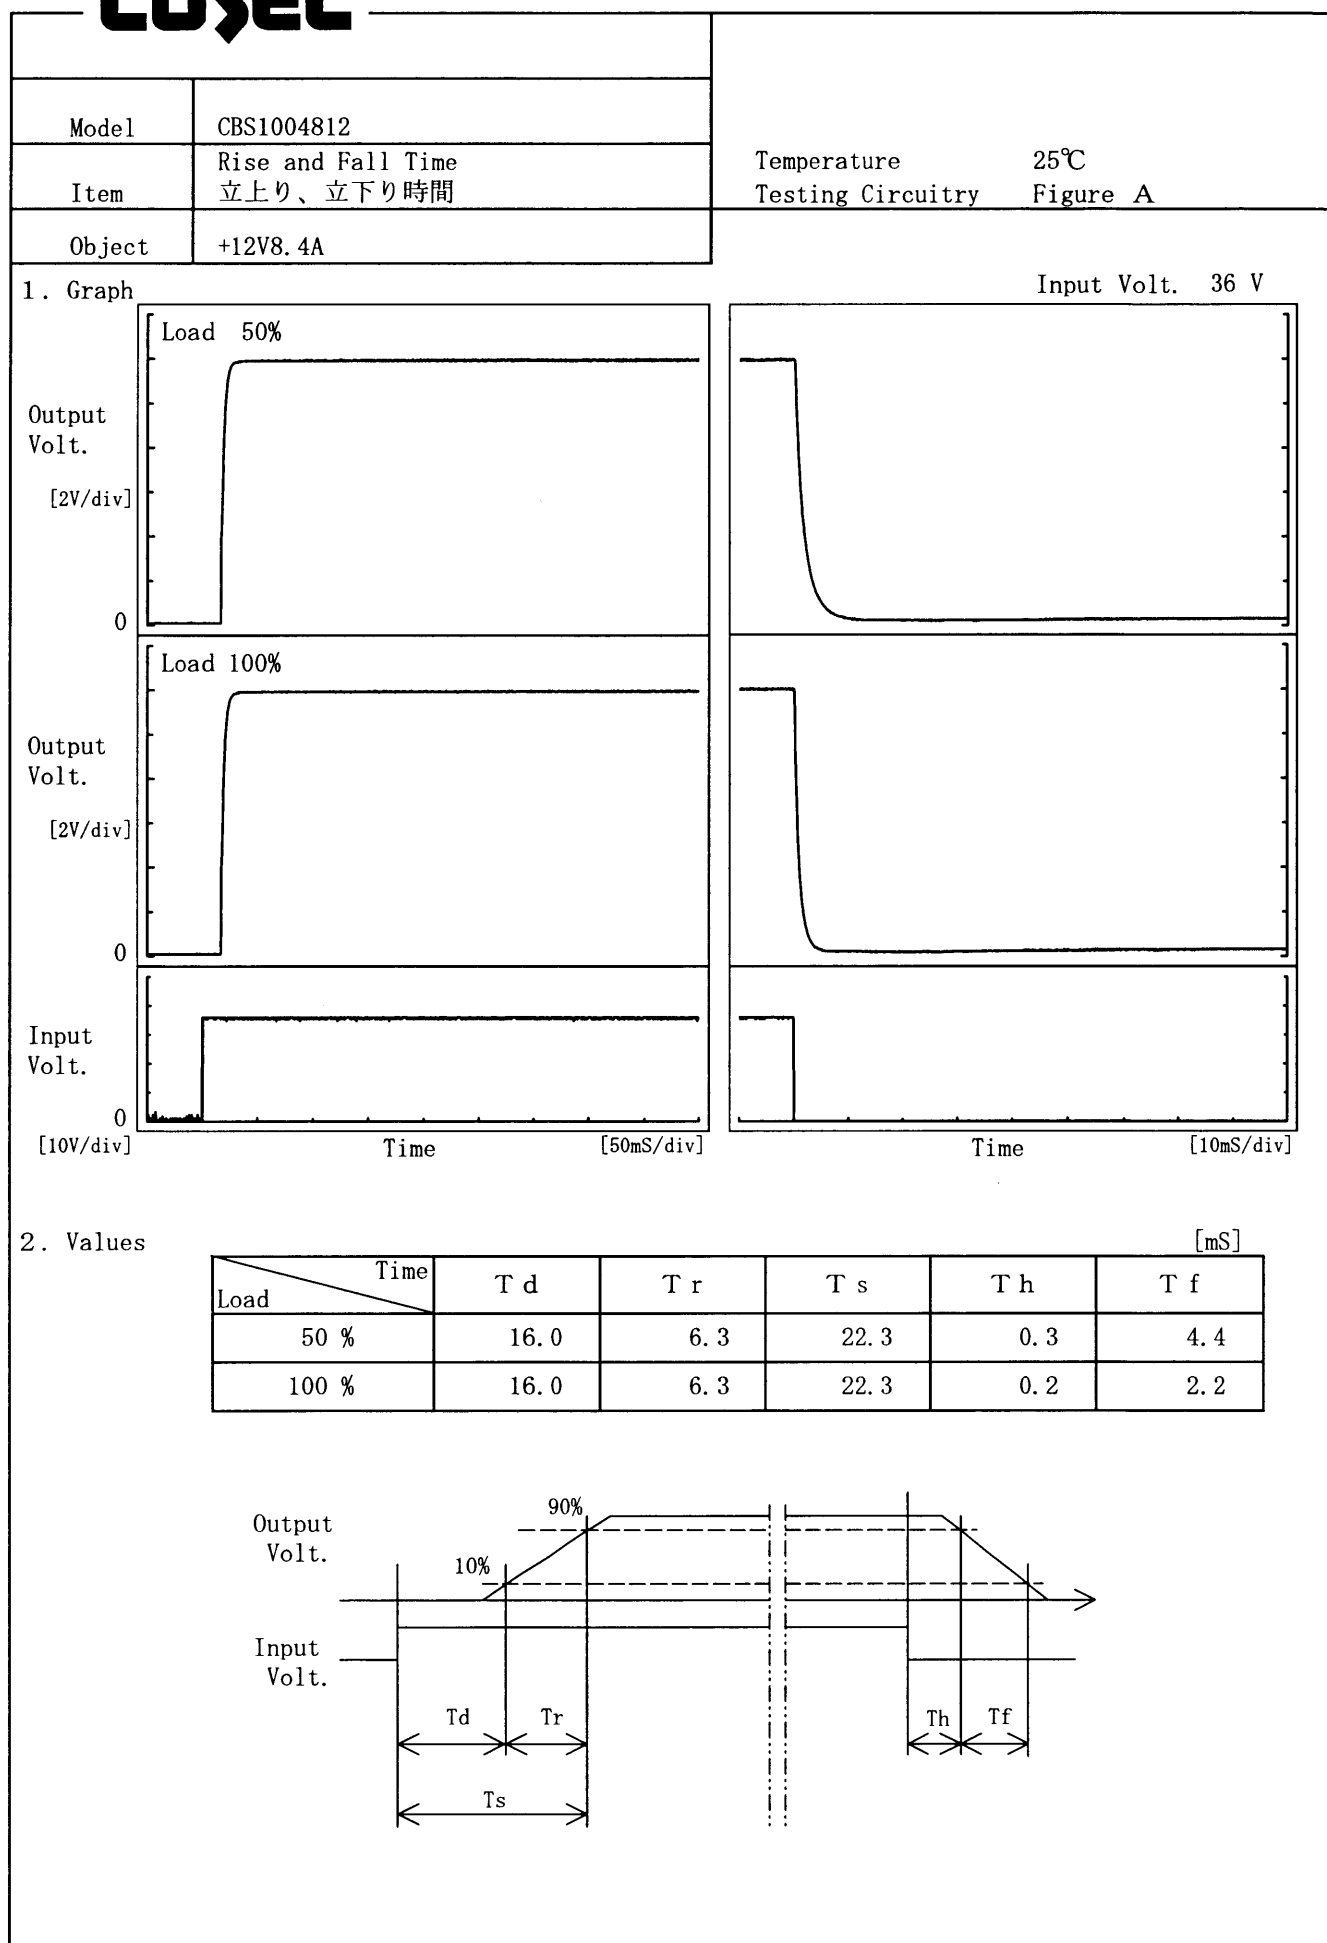

Testing Circuitry Figure A

2. Values

Load 100%

(注) 斜線は定格周囲温度範囲を示す。

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
-50	12.054	12.054	12.055
-40	12.060	12.061	12.062
-20	12.072	12.072	12.073
0	12.083	12.084	12.084
25	12.092	12.092	12.093
40	12.090	12.090	12.091
60	12.083	12.083	12.083
85	12.068	12.068	12.069
100	12.056	12.056	12.056
105	12.050	12.050	12.050
--	-	-	-

COSEL


COSEL

Model	CBS1004812																																								
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)	Testing Circuitry Figure A																																							
Object	+12V8.4A																																								
1. Graph		2. Values																																							
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <p>Input Volt. 48V</p>		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Ripple Voltage [mV]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>-50</td><td>30</td><td>30</td></tr><tr><td>-40</td><td>25</td><td>25</td></tr><tr><td>-20</td><td>15</td><td>15</td></tr><tr><td>0</td><td>10</td><td>10</td></tr><tr><td>25</td><td>5</td><td>5</td></tr><tr><td>40</td><td>5</td><td>5</td></tr><tr><td>60</td><td>5</td><td>5</td></tr><tr><td>85</td><td>5</td><td>5</td></tr><tr><td>100</td><td>10</td><td>10</td></tr><tr><td>105</td><td>10</td><td>10</td></tr><tr><td>--</td><td>--</td><td>--</td></tr></table>		Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-50	30	30	-40	25	25	-20	15	15	0	10	10	25	5	5	40	5	5	60	5	5	85	5	5	100	10	10	105	10	10	--	--	--
Ambient Temperature [°C]	Ripple Voltage [mV]																																								
	Load 50%	Load 100%																																							
-50	30	30																																							
-40	25	25																																							
-20	15	15																																							
0	10	10																																							
25	5	5																																							
40	5	5																																							
60	5	5																																							
85	5	5																																							
100	10	10																																							
105	10	10																																							
--	--	--																																							
Note: Slanted line shows the range of the rated ambient temperature.																																									
(注) 斜線は定格周囲温度範囲を示す。																																									

- 16 -

BC-3329

COSEL

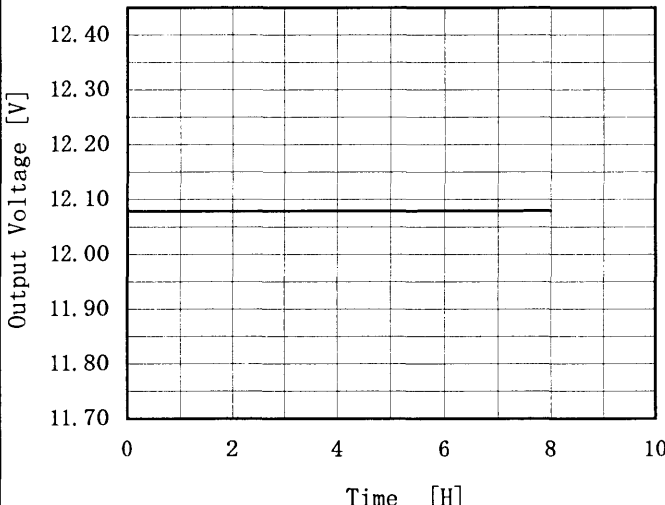Model	CBS1004812																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25℃																						
Object	+12V8.4A	Testing Circuitry	Figure A																						
1. Graph		2. Values																							
<div><p>Output Voltage [V]</p><p>Time [H]</p><p>Input Volt. 48V</p><p>Load 100%</p></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>12.082</td></tr><tr><td>0.5</td><td>12.079</td></tr><tr><td>1.0</td><td>12.079</td></tr><tr><td>2.0</td><td>12.079</td></tr><tr><td>3.0</td><td>12.079</td></tr><tr><td>4.0</td><td>12.079</td></tr><tr><td>5.0</td><td>12.079</td></tr><tr><td>6.0</td><td>12.080</td></tr><tr><td>7.0</td><td>12.080</td></tr><tr><td>8.0</td><td>12.080</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	12.082	0.5	12.079	1.0	12.079	2.0	12.079	3.0	12.079	4.0	12.079	5.0	12.079	6.0	12.080	7.0	12.080	8.0	12.080
Time since start [H]	Output Voltage [V]																								
0.0	12.082																								
0.5	12.079																								
1.0	12.079																								
2.0	12.079																								
3.0	12.079																								
4.0	12.079																								
5.0	12.079																								
6.0	12.080																								
7.0	12.080																								
8.0	12.080																								

		Testing Circuitry Figure A
Model	CBS1004812	
Item	Condense 結露特性	
Object	+12V8.4A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で -10°C に冷却しておき、約1時間後に恒温槽から取り出し、室温 25°C 、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	11.900	Input Volt. :48V, Load Current. :8.4A
Line Regulation [mV]	1	Input Volt. :36~76V, Load Current. :8.4A
Load Regulation [mV]	1	Input Volt. :48V, Load Current. :0~8.4A

COSEL

Model	CBS1004812	Temperature 25℃ Testing Circuitry Figure B
Item	Line Noise Tolerance 入力雑音耐量	
Object	+12V8.4A	

1. Conditions

- Input Voltage : 48 V
- Pulse Voltage : 2000 V
- Pulse Cycle : 16.7 ms
- Pulse Input Duration : 1 min. or more
- Load : 100 %

2. Results

Pulse Width [ns]	MODE		No protection failure should occur	DC-like Regulation of Output Voltage
		POLARITY	保護回路の誤動作がない	出力電圧の直流的変動
50	COMMON	+	OK	no fluctuation
		—	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		—	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		—	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		—	OK	no fluctuation

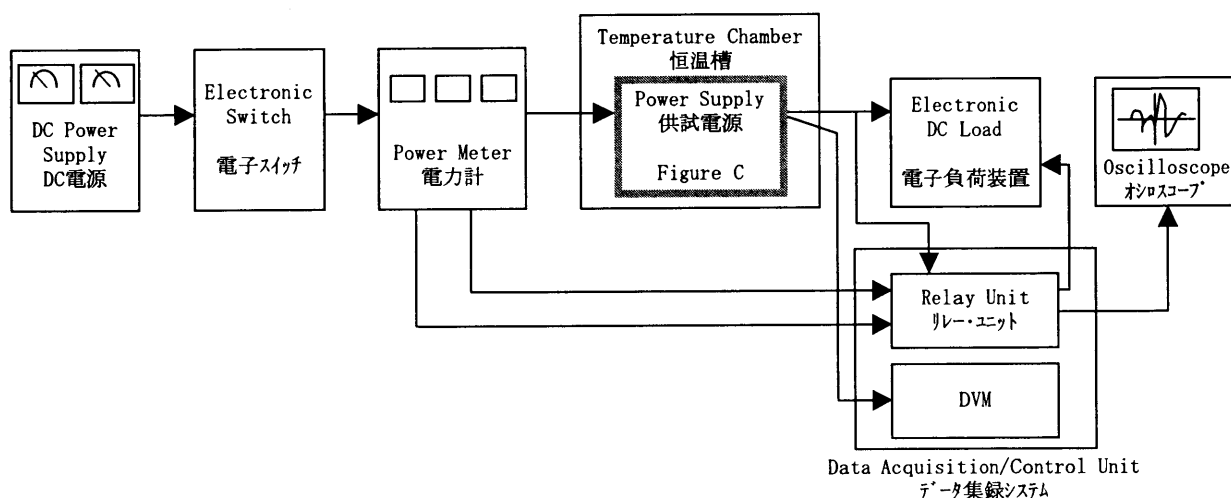


Figure A

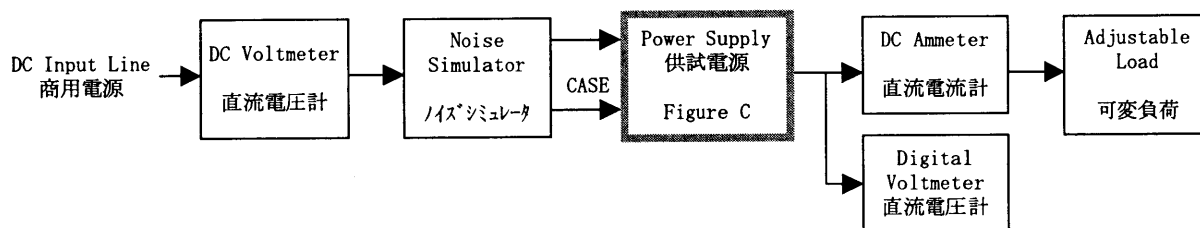


Figure B

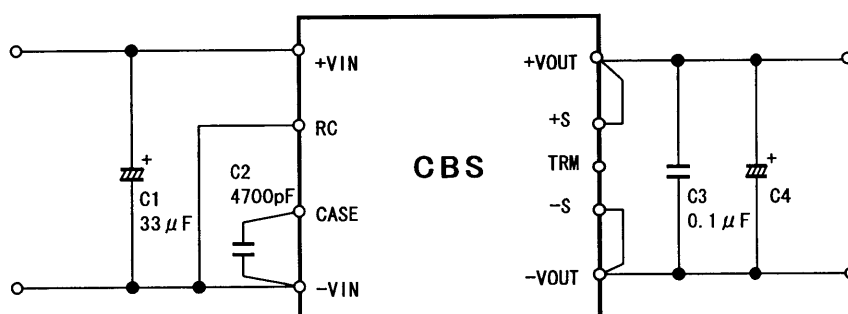


Figure C

C1 : 100V 33 μ F

C2 : 4700pF

C3 : 50V 0.1 μ F $(-40^{\circ}\text{C} \leq T_B \leq -20^{\circ}\text{C})$

C4 : CBS1004803, 05	10V 2200 μ F ×2
CBS1004812, 15	35V 470 μ F ×2
CBS1004824, 28	35V 220 μ F ×2

 $(-20^{\circ}\text{C} < T_B \leq 100^{\circ}\text{C})$

C4 : CBS1004803, 05	10V 2200 μ F
CBS1004812, 15	35V 470 μ F
CBS1004824, 28	35V 220 μ F

 T_B : Base Plate Temp.