

# TEST DATA OF SUCS1R52405

Regulated DC Power Supply  
Sep 17, 2004

Approved by : Tetsuo Sugimori  
Tetsuo Sugimori Design Manager

Prepared by : Masahiro Shima  
Masahiro Shima Design Engineer

**COSEL CO.,LTD.**

## CONTENTS

1.Input Current (by Input Voltage) . . . . .	1
2.Input Current (by Load Current) . . . . .	2
3.Input Power (by Load Current) . . . . .	3
4.Efficiency (by Input Voltage) . . . . .	4
5.Efficiency (by Load Current) . . . . .	5
6.Line Regulation . . . . .	6
7.Load Regulation . . . . .	7
8.Dynamic Load Response . . . . .	8
9.Ripple Voltage (by Load Current) . . . . .	9
10.Ripple-Noise . . . . .	10
11.Ripple Voltage (by Ambient Temperature) . . . . .	11
12.Ambient Temperature Drift . . . . .	12
13.Output Voltage Accuracy . . . . .	13
14.Time Lapse Drift . . . . .	14
15.Rise and Fall Time . . . . .	15
16.Minimum Input Voltage for Regulated Output Voltage . . . . .	16
17.Overcurrent Protection . . . . .	17
18.Figure of Testing Circuitry . . . . .	18

(Final Page 18)

# COSEL

Model

SUCS1R52405

Item

Input Current (by Input Voltage)

Object

1.Graph

—△—

Load 100%

---□---

Load 50%

---○---

Load 0%

Input Current [A]

0.30

0.20

0.10

0.00

0

10

20

30

40

Input Voltage [V]

Note: Slanted line shows the range of the rated input voltage.

2.Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0	0.000	0.000	0.000
4.0	0.000	0.000	0.000
8.0	0.015	0.000	0.163
10.4	0.011	0.100	0.204
12.0	0.011	0.086	0.166
16.0	0.010	0.065	0.122
18.0	0.009	0.059	0.109
20.0	0.009	0.053	0.098
24.0	0.009	0.045	0.083
28.0	0.008	0.040	0.072
32.0	0.008	0.036	0.064
36.0	0.008	0.033	0.058
40.0	0.009	0.031	0.053
--	-	-	-
--	-	-	-
--	-	-	-

# COSEL


Model		SUCS1R52405																																																				
Item		Input Current (by Load Current)																																																				
Object																																																						
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>18V</div></div><div><div>---□---</div><div>Input Volt.</div><div>24V</div></div><div><div>---○---</div><div>Input Volt.</div><div>36V</div></div></div> <p>Input Current [A]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>0.00</td><td>0.009</td><td>0.009</td><td>0.008</td></tr><tr><td>0.06</td><td>0.029</td><td>0.023</td><td>0.018</td></tr><tr><td>0.12</td><td>0.049</td><td>0.038</td><td>0.028</td></tr><tr><td>0.18</td><td>0.069</td><td>0.053</td><td>0.038</td></tr><tr><td>0.24</td><td>0.089</td><td>0.068</td><td>0.048</td></tr><tr><td>0.30</td><td>0.109</td><td>0.083</td><td>0.058</td></tr><tr><td>0.33</td><td>0.120</td><td>0.091</td><td>0.063</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.009	0.009	0.008	0.06	0.029	0.023	0.018	0.12	0.049	0.038	0.028	0.18	0.069	0.053	0.038	0.24	0.089	0.068	0.048	0.30	0.109	0.083	0.058	0.33	0.120	0.091	0.063	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	0.009	0.009	0.008																																																			
0.06	0.029	0.023	0.018																																																			
0.12	0.049	0.038	0.028																																																			
0.18	0.069	0.053	0.038																																																			
0.24	0.089	0.068	0.048																																																			
0.30	0.109	0.083	0.058																																																			
0.33	0.120	0.091	0.063																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			

BC-3644

**COSEL**

Model		SUCS1R52405																																	
Item		Efficiency (by Input Voltage)																																	
Object																																			
1.Graph		2.Values																																	
<div><div><div><div><div></div><div></div></div><div></div></div><div><div><div></div><div></div></div><div></div></div><div><div><div></div><div></div></div><div></div></div></div><div>Load 50%</div><div>Load 100%</div></div> <div><div><div><div>80</div><div>70</div><div>60</div><div>50</div><div>40</div><div>30</div></div><div><div>10</div><div>20</div><div>30</div><div>40</div></div></div><div>Efficiency [%]</div><div>Input Voltage [V]</div></div> <div><div>Note: Slanted line shows the range of the rated input voltage.</div></div>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>16</td><td>71.9</td><td>76.1</td></tr><tr><td>18</td><td>71.2</td><td>76.0</td></tr><tr><td>20</td><td>70.5</td><td>75.9</td></tr><tr><td>24</td><td>68.7</td><td>75.2</td></tr><tr><td>30</td><td>66.2</td><td>73.8</td></tr><tr><td>36</td><td>62.7</td><td>71.8</td></tr><tr><td>40</td><td>60.1</td><td>70.1</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr></table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	16	71.9	76.1	18	71.2	76.0	20	70.5	75.9	24	68.7	75.2	30	66.2	73.8	36	62.7	71.8	40	60.1	70.1	-	-	-	-	-	-
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
16	71.9	76.1																																	
18	71.2	76.0																																	
20	70.5	75.9																																	
24	68.7	75.2																																	
30	66.2	73.8																																	
36	62.7	71.8																																	
40	60.1	70.1																																	
-	-	-																																	
-	-	-																																	
		- 4 -																																	
		BC-3644																																	

# COSEL

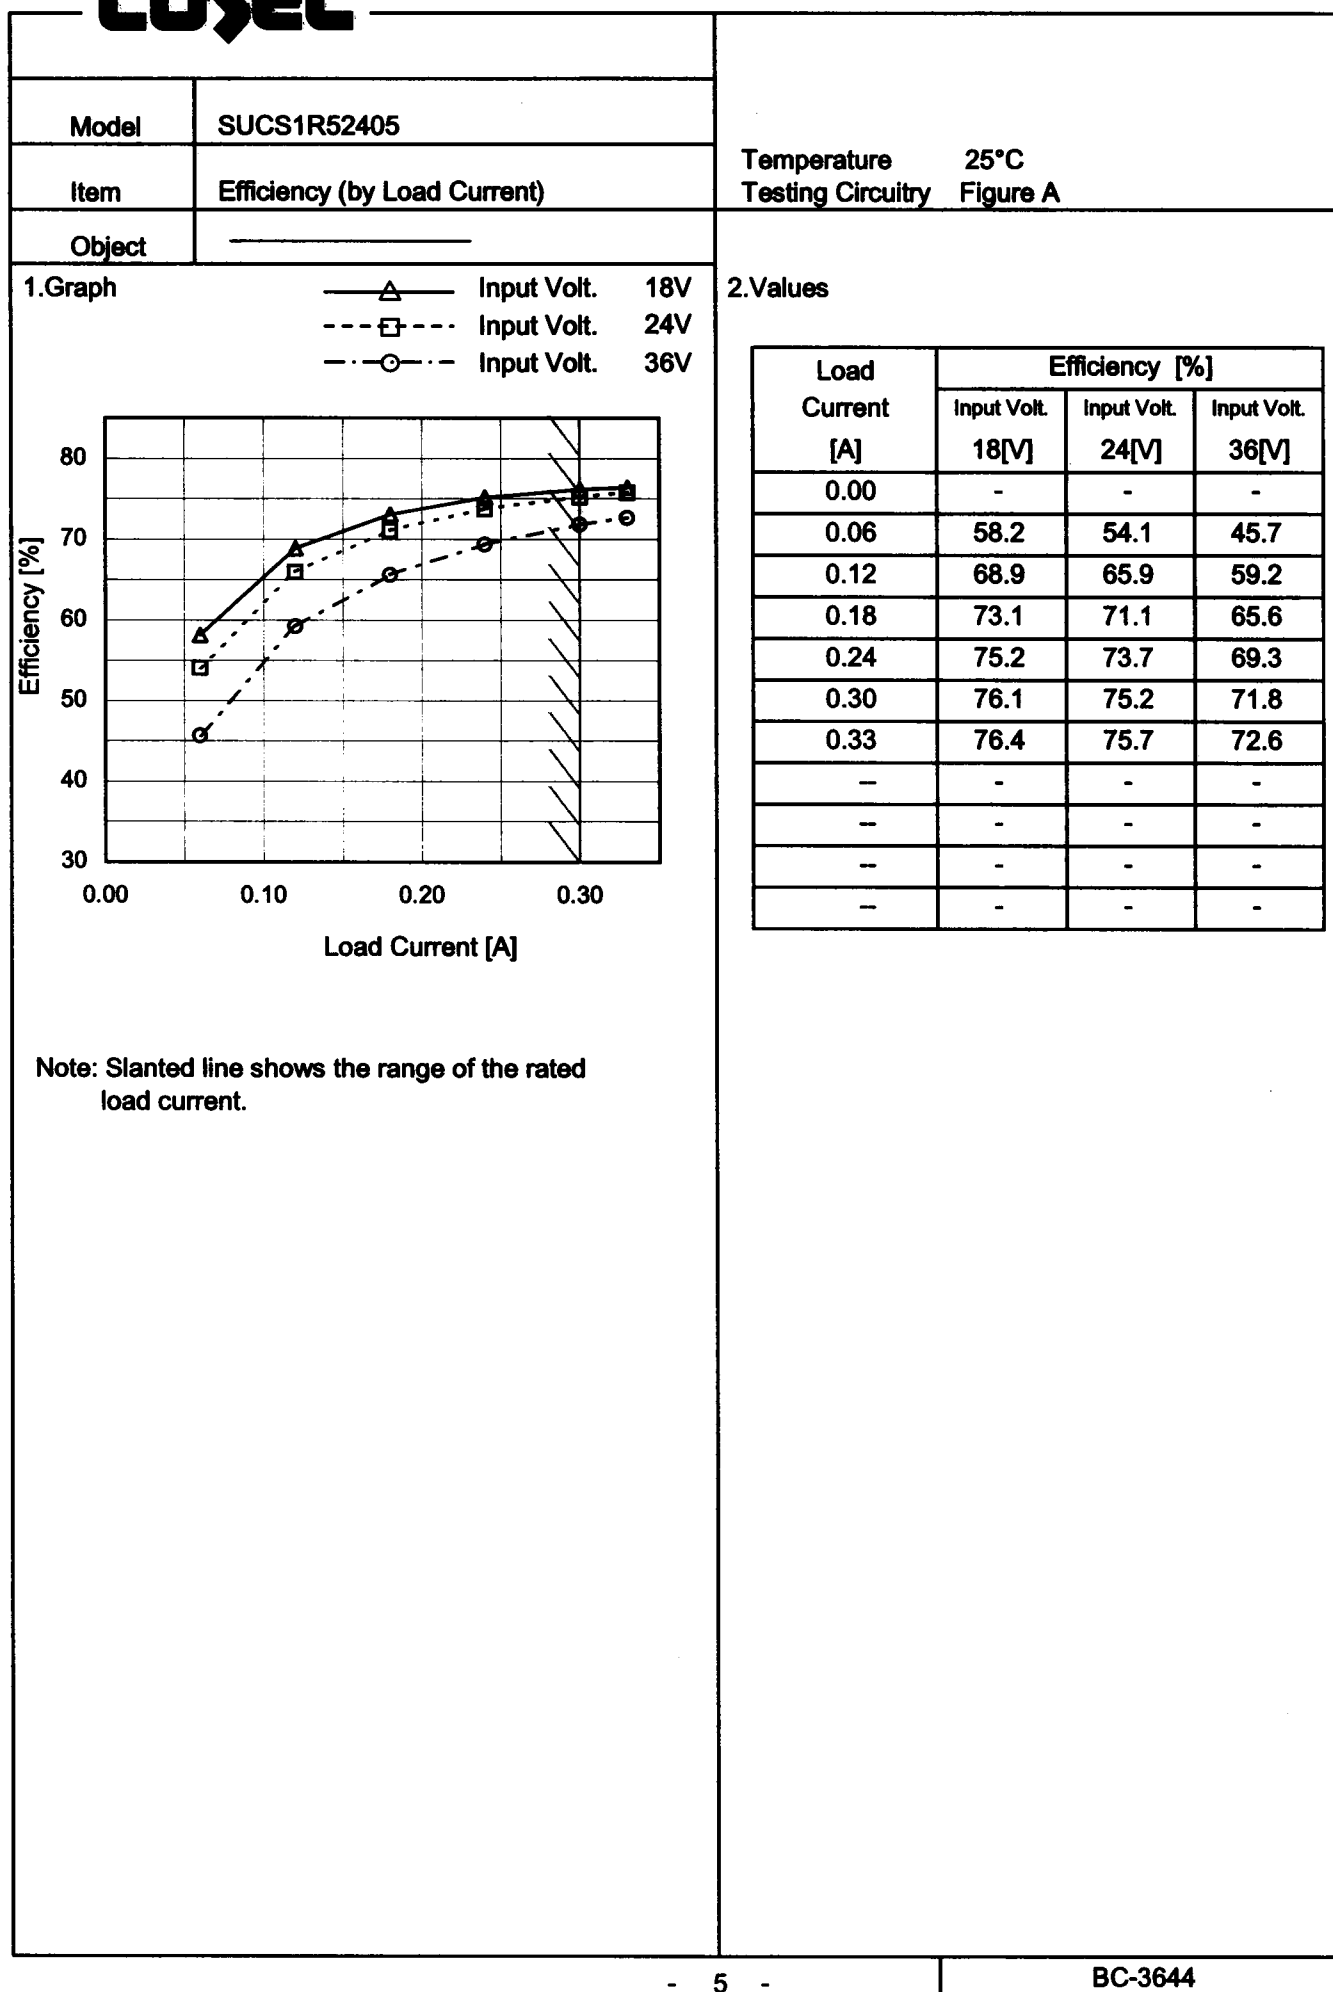

# COSEL

Model		SUCS1R52405																																	
Item		Line Regulation																																	
Object		+5V0.3A																																	
1.Graph		2.Values																																	
<div><div><div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div>Load 50%</div><div>Load 100%</div></div> <table><thead><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>16</td><td>5.000</td><td>4.997</td></tr><tr><td>18</td><td>5.000</td><td>4.998</td></tr><tr><td>20</td><td>5.001</td><td>4.998</td></tr><tr><td>24</td><td>5.001</td><td>4.999</td></tr><tr><td>30</td><td>5.001</td><td>4.999</td></tr><tr><td>36</td><td>5.001</td><td>4.999</td></tr><tr><td>40</td><td>5.001</td><td>4.999</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr></tbody></table> <p>Note: Slanted line shows the range of the rated input voltage.</p>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	16	5.000	4.997	18	5.000	4.998	20	5.001	4.998	24	5.001	4.999	30	5.001	4.999	36	5.001	4.999	40	5.001	4.999	-	-	-	-	-	-		
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
16	5.000	4.997																																	
18	5.000	4.998																																	
20	5.001	4.998																																	
24	5.001	4.999																																	
30	5.001	4.999																																	
36	5.001	4.999																																	
40	5.001	4.999																																	
-	-	-																																	
-	-	-																																	
		BC-3644																																	




- 7 -

# COSEL


Model	SUCS1R52405	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+5V0.3A		

Input Volt. 24 V  
Cycle 100 mS

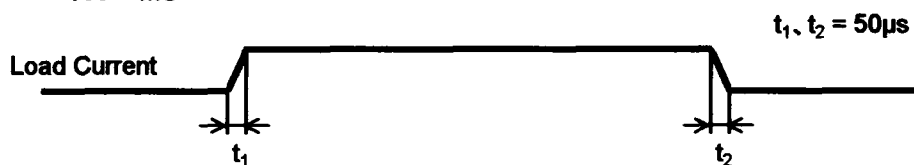


Min. Load (0A)  $\longleftrightarrow$   
Load 100% (0.3A)

100mV/div

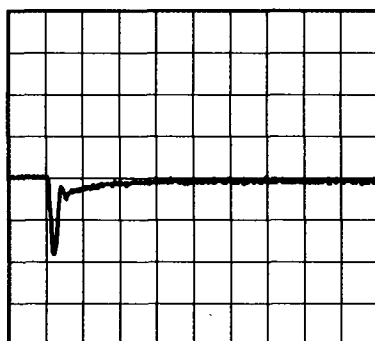


200µs/div

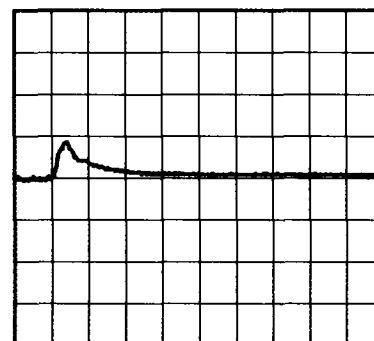


200µs/div

Min. Load (0A)  $\longleftrightarrow$   
Load 50% (0.15A)

100mV/div

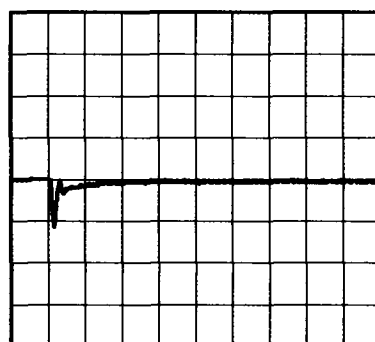


200µs/div

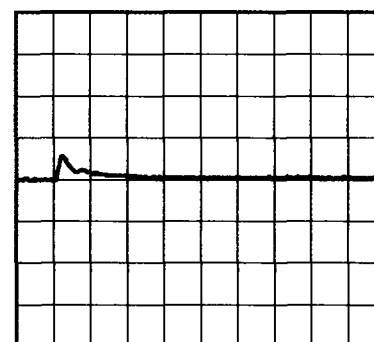

200µs/div

Load 50% (0.15A)  $\longleftrightarrow$   
Load 100% (0.3A)


100mV/div

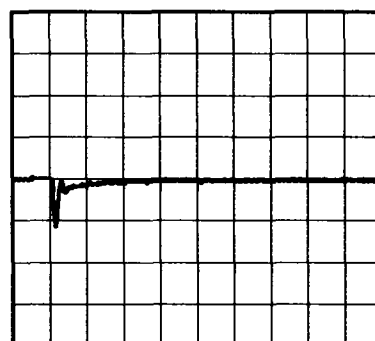

200µs/div



200µs/div

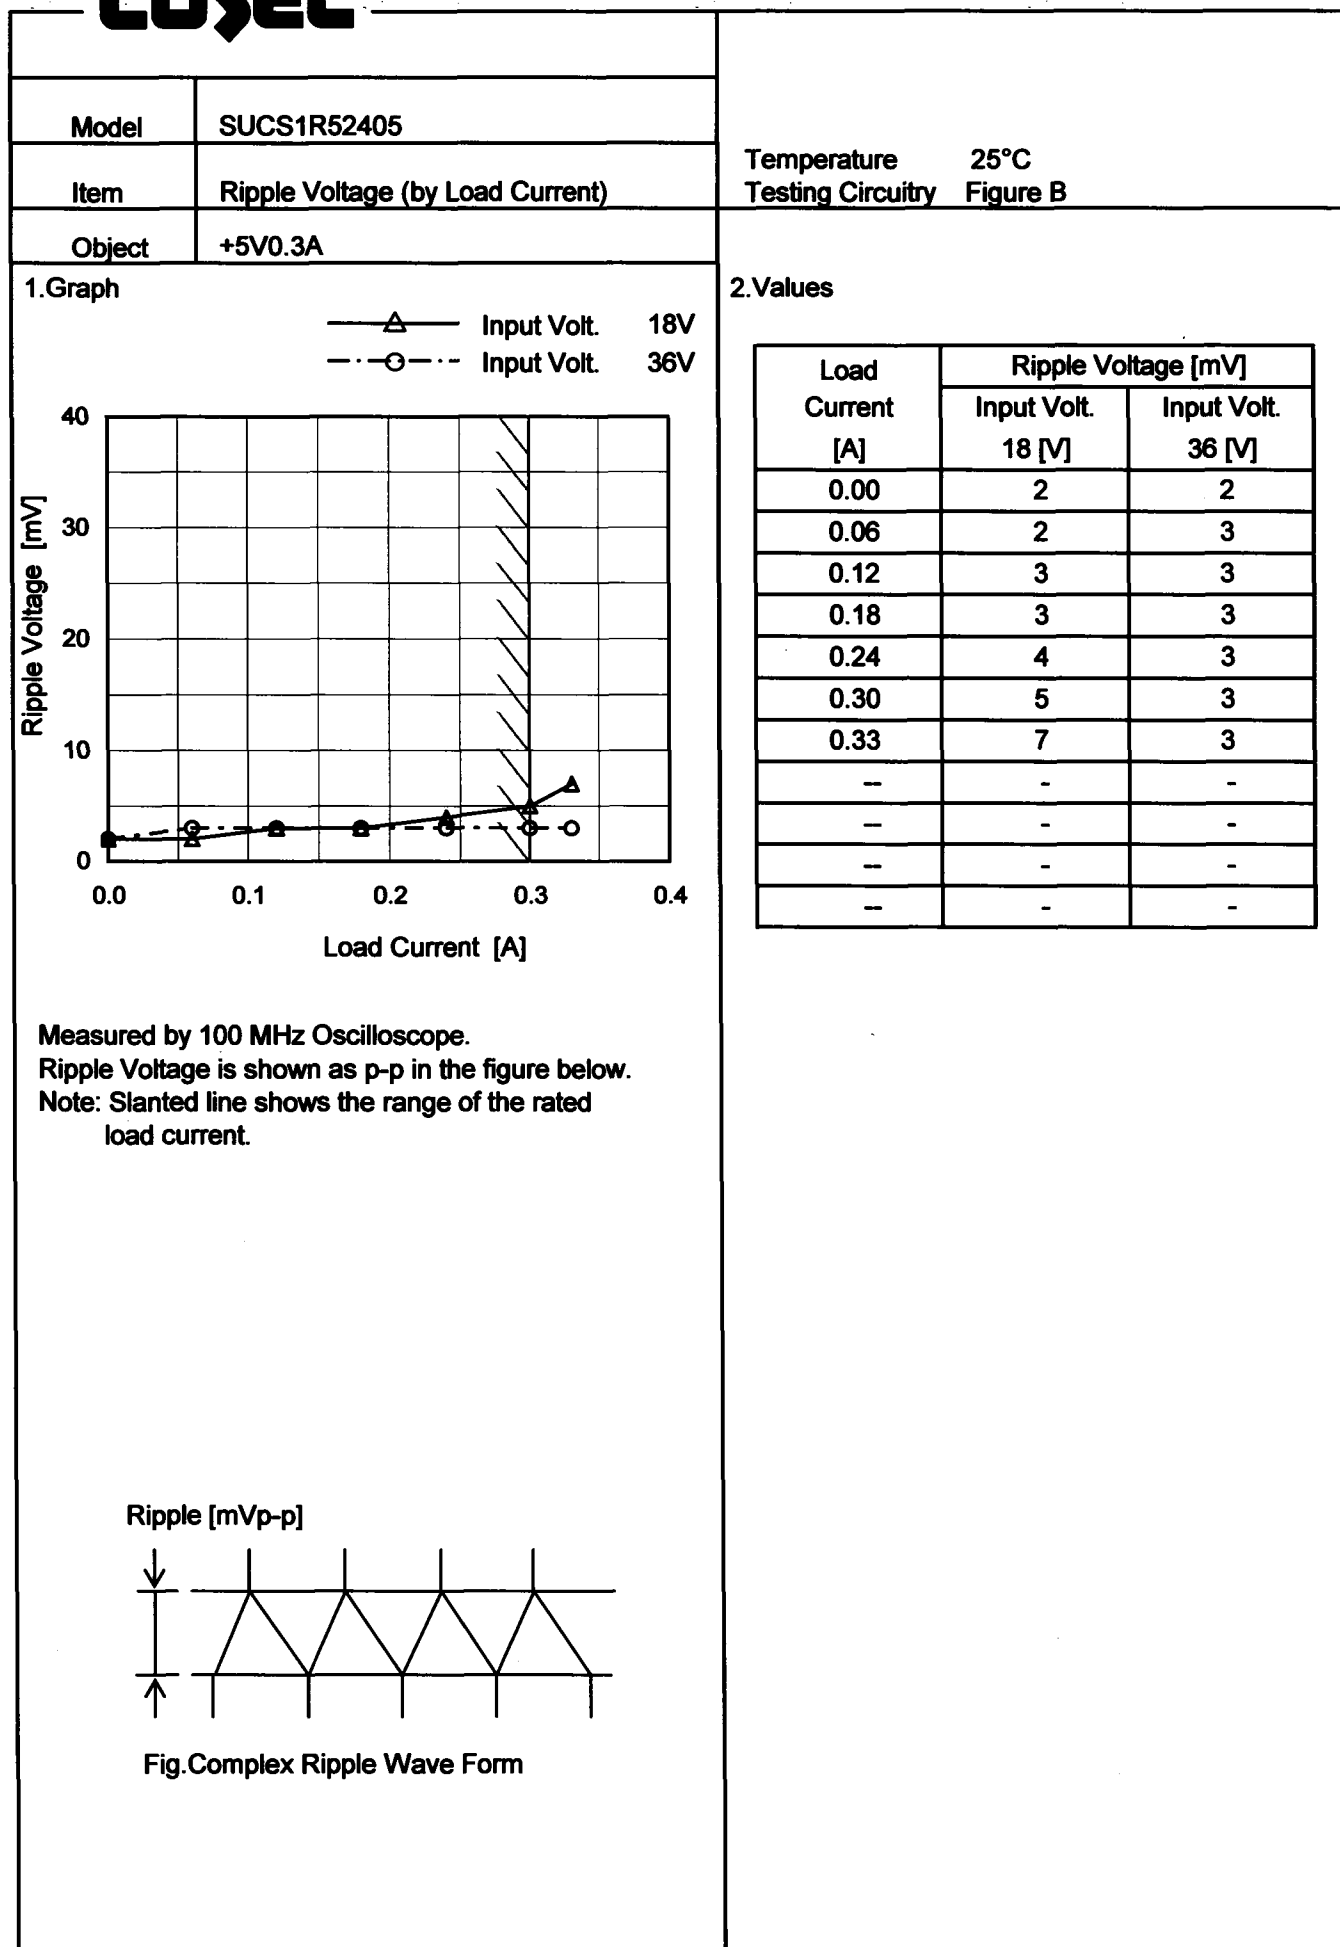**COSEL**

**COSEL**


Model SUCS1R52405

Item Ripple-Noise

Object +5V0.3A

Temperature 25°C  
Testing Circuitry Figure B

## 1. Graph

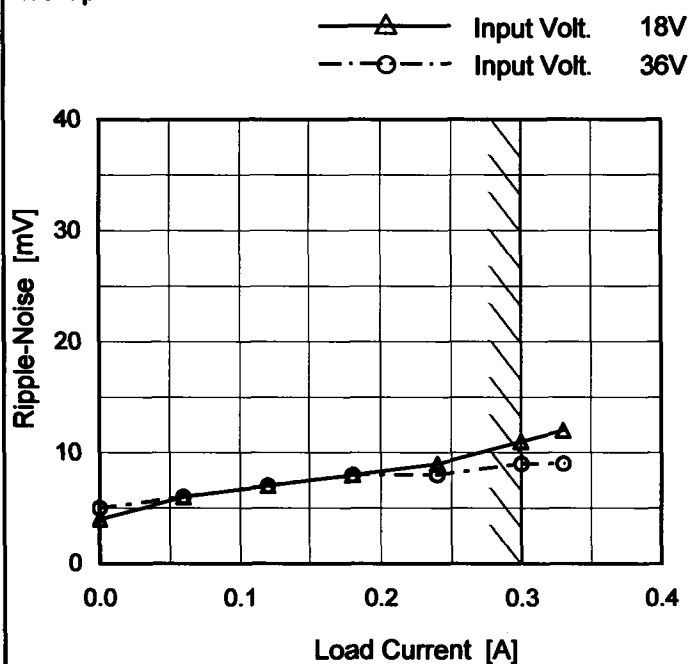

Measured by 100 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

## 2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.00	4	5
0.06	6	6
0.12	7	7
0.18	8	8
0.24	9	8
0.30	11	9
0.33	12	9
—	—	—
—	—	—
—	—	—
—	—	—

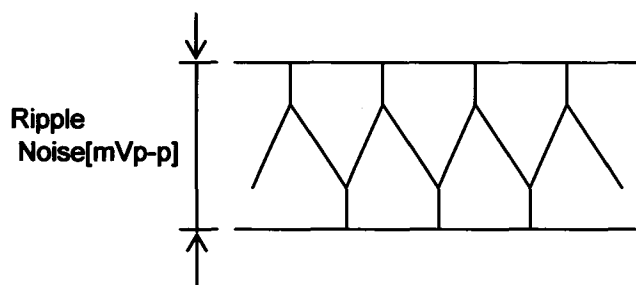


Fig. Complex Ripple Noise Wave Form

**COSEL**

Model

SUCS1R52405

Item


Ripple Voltage (by Ambient Temp.)

Object

+5V0.3A

Testing Circuitry Figure B

## 1. Graph

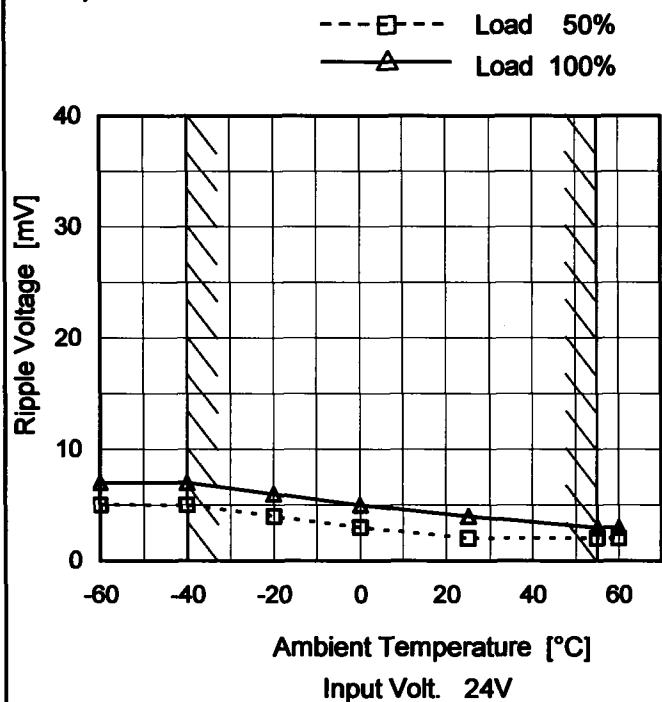

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.

## 2. Values


Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	5	7
-40	5	7
-20	4	6
0	3	5
25	2	4
55	2	3
60	2	3
—	—	—
—	—	—
—	—	—
—	—	—

**COSEL**

Model	SUCS1R52405
Item	Ambient Temperature Drift
Object	+5V0.3A

## 1.Graph

—△— Input Volt. 18V  
 ---□--- Input Volt. 24V  
 -·-○-·- Input Volt. 36V

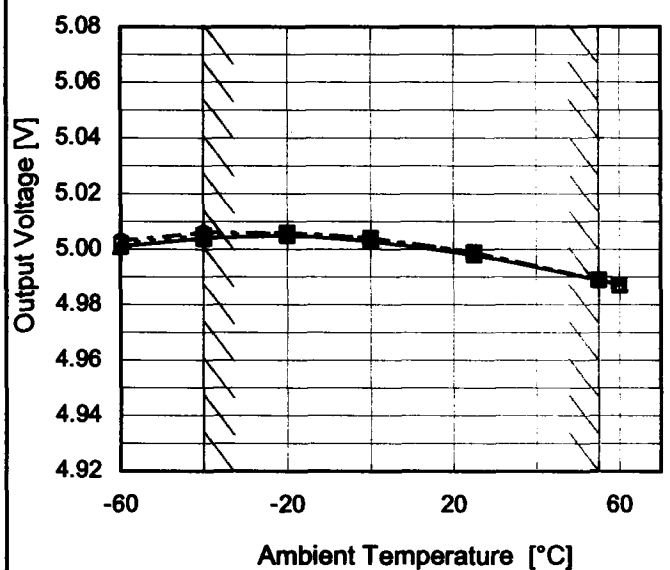

Note: Slanted line shows the range of the rated ambient temperature.

## Testing Circuitry Figure A

## 2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
-60	5.001	5.002	5.003
-40	5.004	5.005	5.006
-20	5.005	5.006	5.006
0	5.003	5.004	5.004
25	4.998	4.999	4.999
55	4.989	4.989	4.989
60	4.987	4.987	4.987
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

**COSEL**

		Testing Circuitry Figure A
Model	SUCS1R52405	
Item	Output Voltage Accuracy	
Object	+5V0.3A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 18 - 36V

Load Current : 0 - 0.3A


\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ratio) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

### 2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	-20	36	0	5.008	±10	±0.2
Minimum Voltage	55	24	0.3	4.989		


**COSEL**

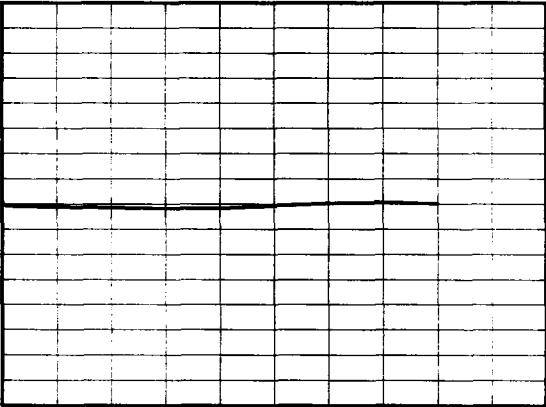Model	SUCS1R52405																								
Item	Time Lapse Drift	Temperature	25°C																						
Object	+5V0.3A	Testing Circuitry	Figure A																						
1.Graph		2.Values																							
<div><div><div>5.08</div><div>5.06</div><div>5.04</div><div>5.02</div><div>5.00</div><div>4.98</div><div>4.96</div><div>4.94</div><div>4.92</div></div><div></div><div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div></div><div><div>Time [H]</div><div>Input Volt. 24V</div><div>Load 100%</div></div></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>5.002</td></tr><tr><td>0.5</td><td>4.999</td></tr><tr><td>1.0</td><td>4.999</td></tr><tr><td>2.0</td><td>4.999</td></tr><tr><td>3.0</td><td>4.998</td></tr><tr><td>4.0</td><td>4.998</td></tr><tr><td>5.0</td><td>4.999</td></tr><tr><td>6.0</td><td>5.000</td></tr><tr><td>7.0</td><td>5.001</td></tr><tr><td>8.0</td><td>5.000</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	5.002	0.5	4.999	1.0	4.999	2.0	4.999	3.0	4.998	4.0	4.998	5.0	4.999	6.0	5.000	7.0	5.001	8.0	5.000
Time since start [H]	Output Voltage [V]																								
0.0	5.002																								
0.5	4.999																								
1.0	4.999																								
2.0	4.999																								
3.0	4.998																								
4.0	4.998																								
5.0	4.999																								
6.0	5.000																								
7.0	5.001																								
8.0	5.000																								

- 14 -

BC-3644

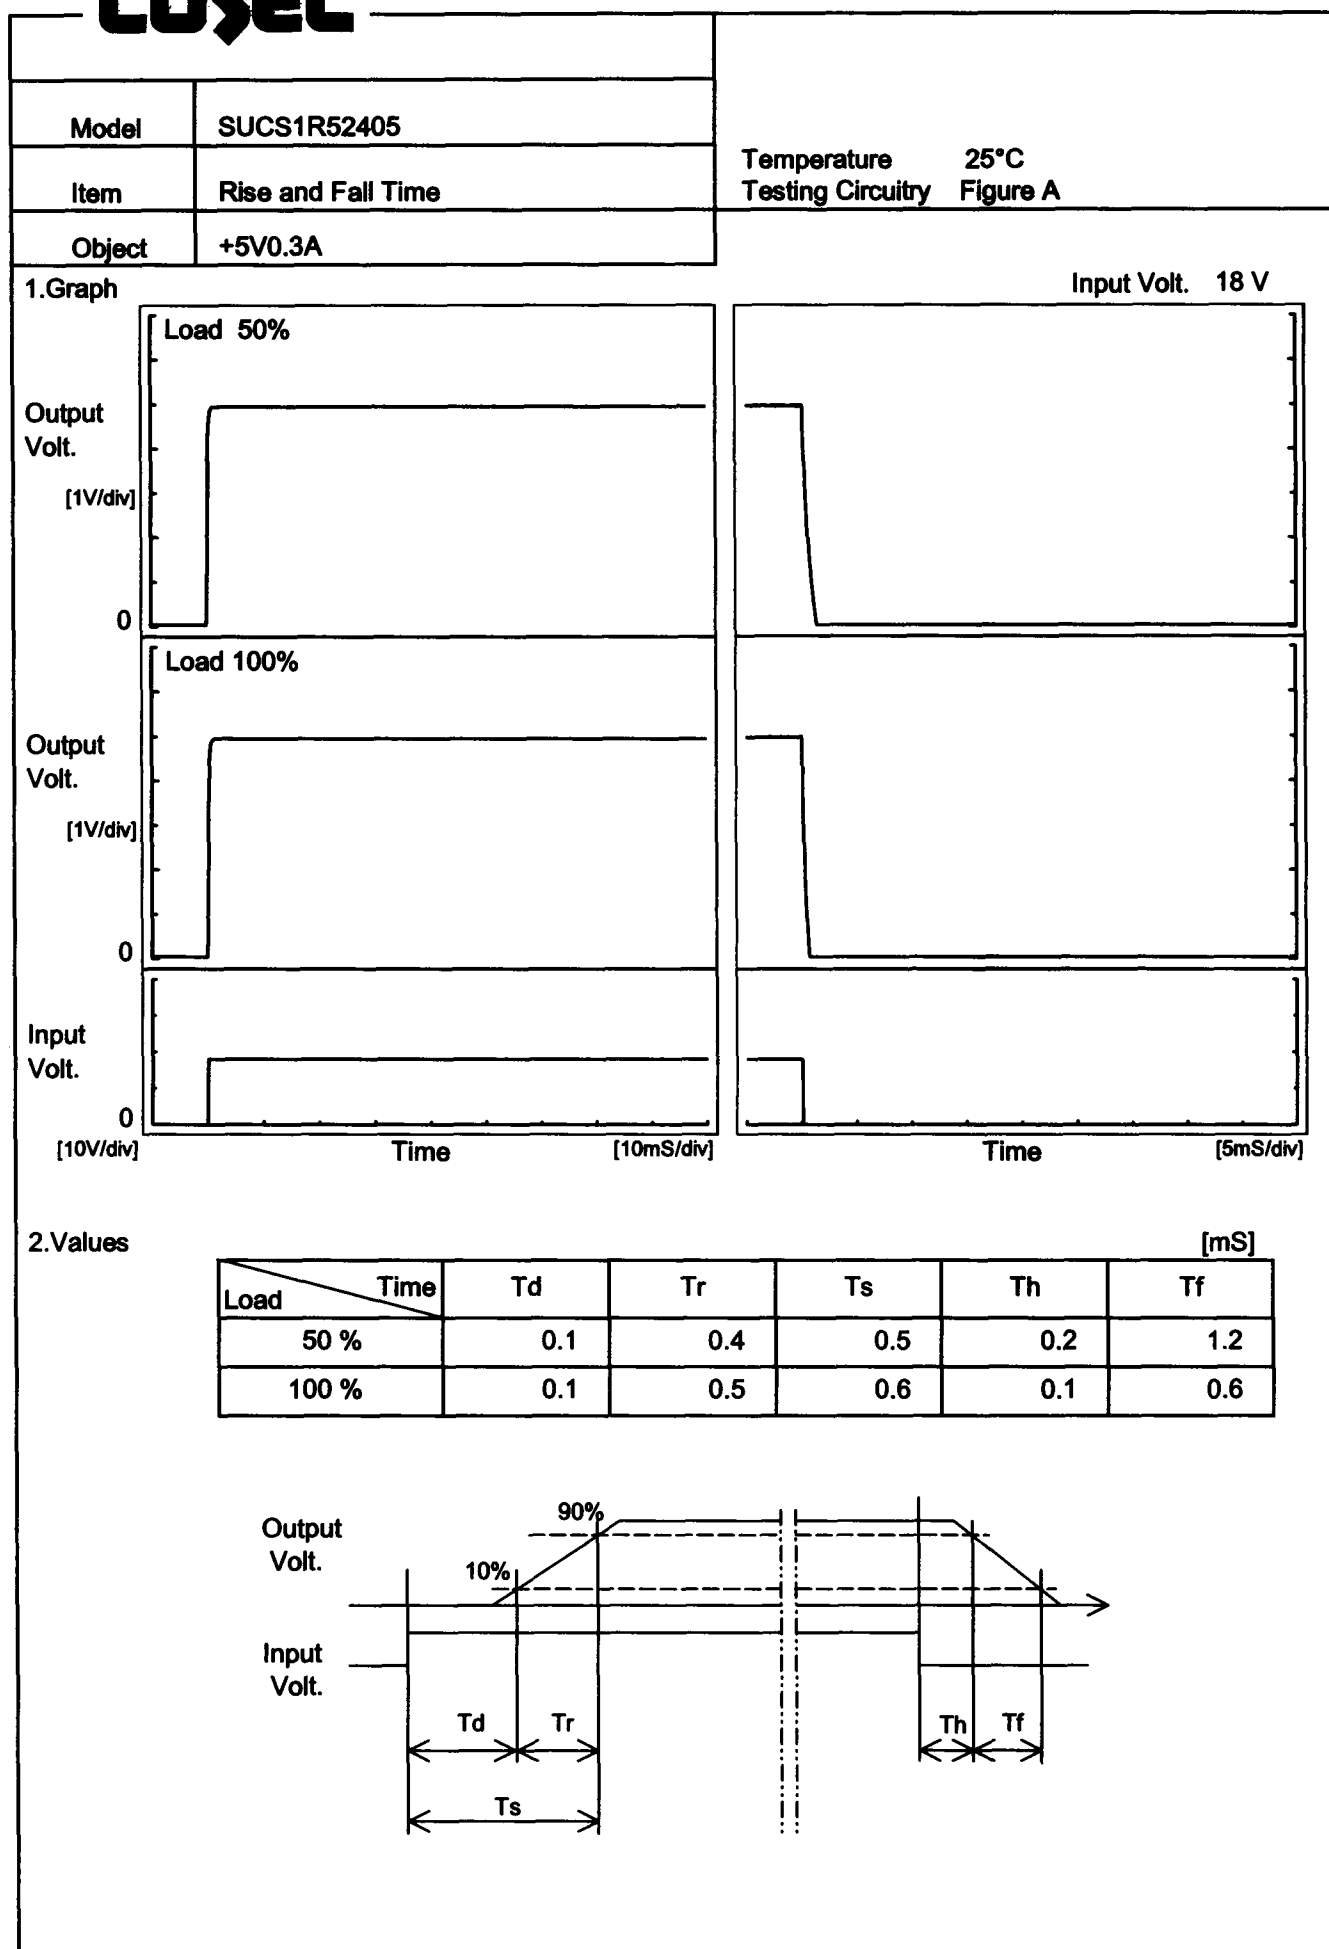

**COSEL**



**COSEL**

Model	SUCS1R52405																																																									
Item	Overcurrent Protection	Temperature	25°C																																																							
Object	+5V0.3A	Testing Circuitry	Figure A																																																							
1.Graph		2.Values																																																								
<div><div><div></div>Input Volt.18V</div><div><div></div>Input Volt.24V</div><div><div></div>Input Volt.36V</div></div> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>5.00</td><td>0.30</td><td>0.30</td><td>0.30</td></tr><tr><td>4.75</td><td>0.49</td><td>0.47</td><td>0.43</td></tr><tr><td>4.50</td><td>0.51</td><td>0.48</td><td>0.44</td></tr><tr><td>4.00</td><td>0.54</td><td>0.51</td><td>0.47</td></tr><tr><td>3.50</td><td>0.57</td><td>0.54</td><td>0.49</td></tr><tr><td>3.00</td><td>0.61</td><td>0.56</td><td>0.52</td></tr><tr><td>2.50</td><td>0.64</td><td>0.59</td><td>0.54</td></tr><tr><td>2.00</td><td>0.68</td><td>0.62</td><td>0.57</td></tr><tr><td>1.50</td><td>0.71</td><td>0.63</td><td>0.58</td></tr><tr><td>1.00</td><td>0.72</td><td>0.64</td><td>0.59</td></tr><tr><td>0.50</td><td>0.72</td><td>0.63</td><td>0.60</td></tr><tr><td>0.00</td><td>0.76</td><td>0.66</td><td>0.66</td></tr></table>		Output Voltage [V]	Load Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	5.00	0.30	0.30	0.30	4.75	0.49	0.47	0.43	4.50	0.51	0.48	0.44	4.00	0.54	0.51	0.47	3.50	0.57	0.54	0.49	3.00	0.61	0.56	0.52	2.50	0.64	0.59	0.54	2.00	0.68	0.62	0.57	1.50	0.71	0.63	0.58	1.00	0.72	0.64	0.59	0.50	0.72	0.63	0.60	0.00	0.76	0.66	0.66
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
5.00	0.30	0.30	0.30																																																							
4.75	0.49	0.47	0.43																																																							
4.50	0.51	0.48	0.44																																																							
4.00	0.54	0.51	0.47																																																							
3.50	0.57	0.54	0.49																																																							
3.00	0.61	0.56	0.52																																																							
2.50	0.64	0.59	0.54																																																							
2.00	0.68	0.62	0.57																																																							
1.50	0.71	0.63	0.58																																																							
1.00	0.72	0.64	0.59																																																							
0.50	0.72	0.63	0.60																																																							
0.00	0.76	0.66	0.66																																																							

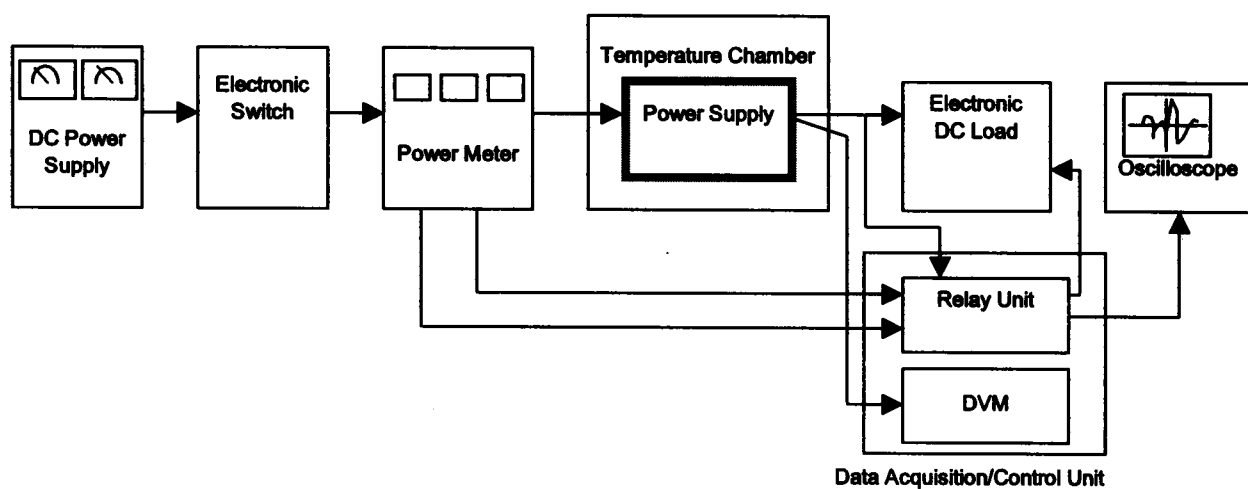


Figure A

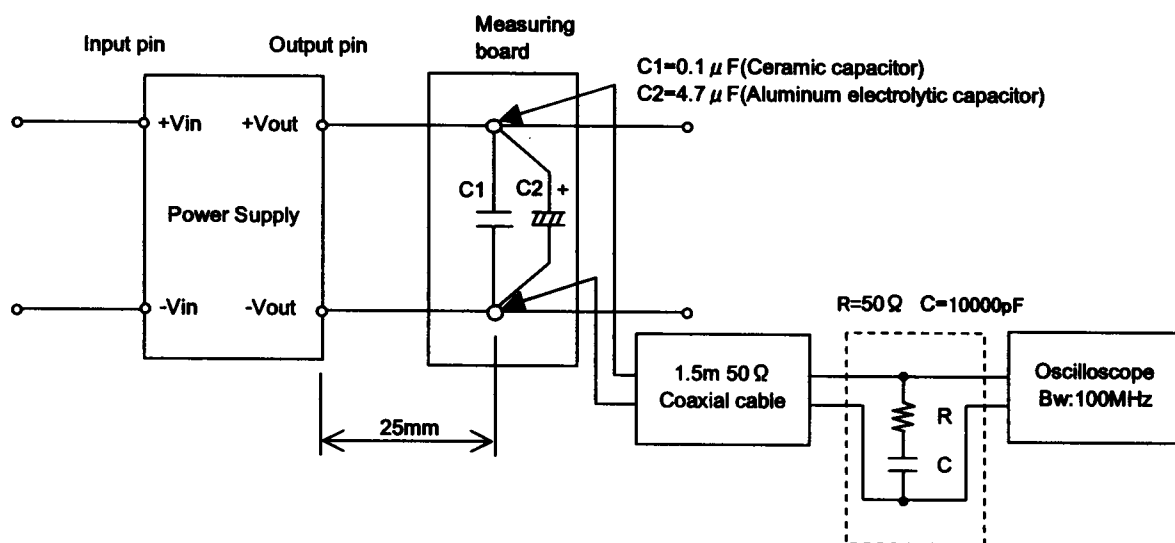


Figure B (Ripple and Ripple noise Characteristic)