

TEST DATA OF SUCS1R5243R3

Regulated DC Power Supply
Sep 17, 2004

Approved by : Tetsuo Sugimori
Tetsuo Sugimori Design Manager

Prepared by : Masahiro Shima
Masahiro Shima Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Input Voltage)	1
2.Input Current (by Load Current)	2
3.Input Power (by Load Current)	3
4.Efficiency (by Input Voltage)	4
5.Efficiency (by Load Current)	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple Voltage (by Load Current)	9
10.Ripple-Noise	10
11.Ripple Voltage (by Ambient Temperature)	11
12.Ambient Temperature Drift	12
13.Output Voltage Accuracy	13
14.Time Lapse Drift	14
15.Rise and Fall Time	15
16.Minimum Input Voltage for Regulated Output Voltage	16
17.Overcurrent Protection	17
18.Figure of Testing Circuitry	18

(Final Page 18)

COSEL

Model		SUCS1R5243R3	
Item		Input Current (by Input Voltage)	
Object			
1.Graph		2.Values	

—△—

Load 100%

---□---

Load 50%


---○---

Load 0%

Note: Slanted line shows the range of the rated input voltage.


Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0	0.000	0.000	0.000
4.0	0.000	0.000	0.000
8.0	0.012	0.000	0.000
8.4	0.011	0.157	0.141
10.4	0.009	0.092	0.187
12.0	0.008	0.077	0.153
16.0	0.007	0.058	0.112
18.0	0.007	0.052	0.099
20.0	0.007	0.047	0.090
24.0	0.006	0.040	0.075
28.0	0.006	0.035	0.065
32.0	0.006	0.032	0.058
36.0	0.007	0.030	0.052
40.0	0.008	0.028	0.048
—	-	-	-
—	-	-	-

COSEL

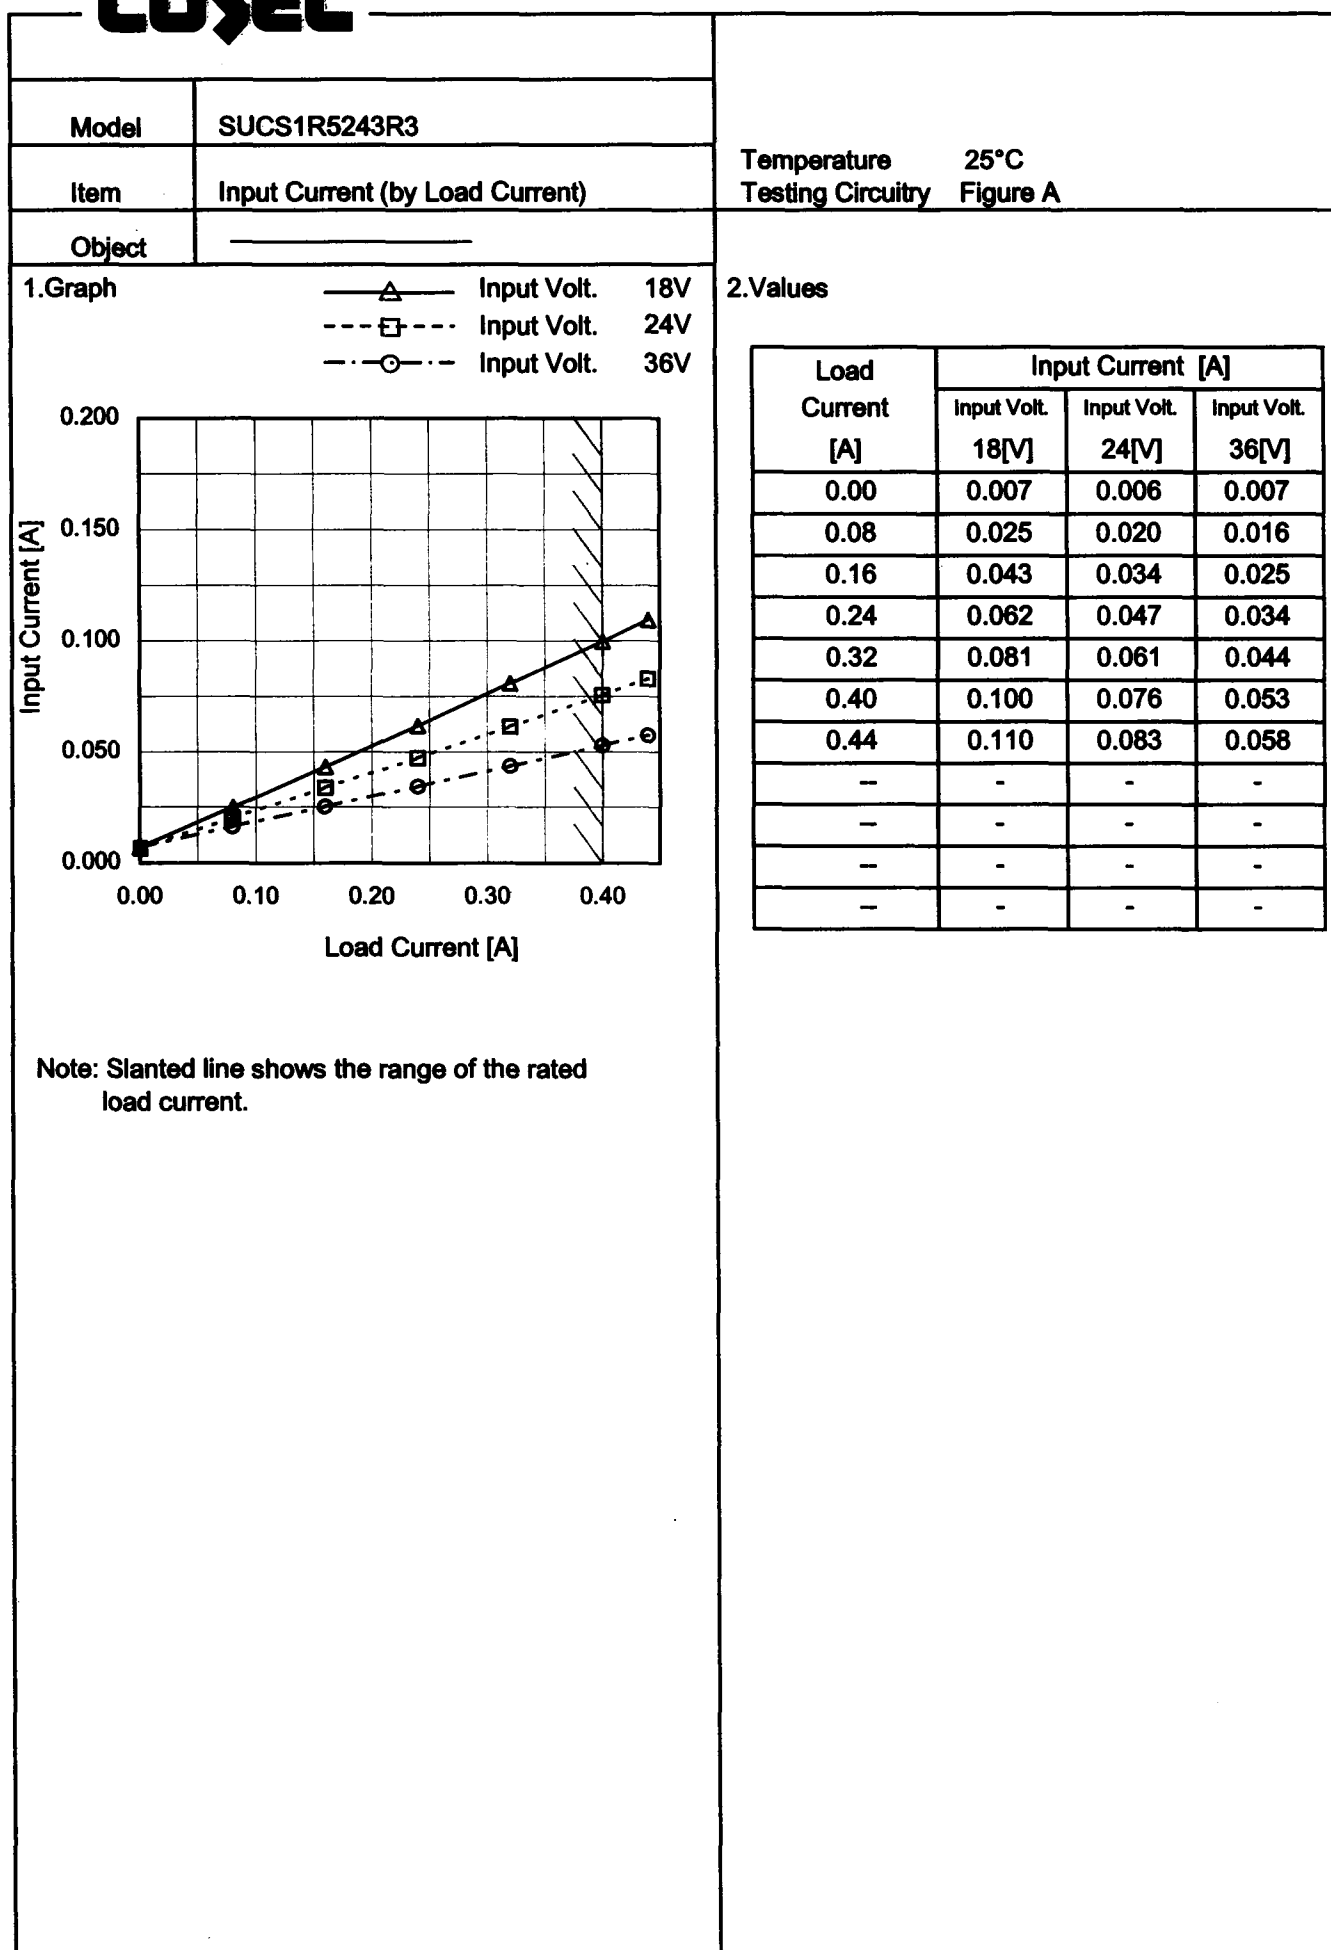

- 3 -

COSEL

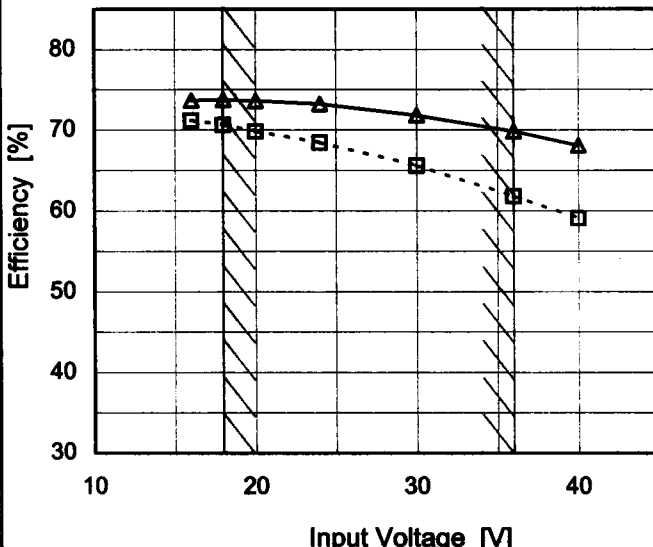Model	SUCS1R5243R3																																		
Item	Efficiency (by Input Voltage)	Temperature	25°C																																
Object		Testing Circuitry	Figure A																																
1.Graph		2.Values																																	
<div><div>---□--- Load 50%</div><div>—△— Load 100%</div><p>Efficiency [%]</p><p>Input Voltage [V]</p><p>Note: Slanted line shows the range of the rated input voltage.</p></div>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>16</td><td>71.2</td><td>73.7</td></tr><tr><td>18</td><td>70.6</td><td>73.7</td></tr><tr><td>20</td><td>69.8</td><td>73.6</td></tr><tr><td>24</td><td>68.5</td><td>73.2</td></tr><tr><td>30</td><td>65.6</td><td>71.8</td></tr><tr><td>36</td><td>61.8</td><td>69.8</td></tr><tr><td>40</td><td>59.1</td><td>68.1</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	16	71.2	73.7	18	70.6	73.7	20	69.8	73.6	24	68.5	73.2	30	65.6	71.8	36	61.8	69.8	40	59.1	68.1	--	-	-	--	-	-
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
16	71.2	73.7																																	
18	70.6	73.7																																	
20	69.8	73.6																																	
24	68.5	73.2																																	
30	65.6	71.8																																	
36	61.8	69.8																																	
40	59.1	68.1																																	
--	-	-																																	
--	-	-																																	

COSEL

Model		SUCS1R5243R3	
Item		Efficiency (by Load Current)	
Object			

1.Graph

—△—

Input Volt.

18V

---□---

Input Volt.

24V

---○---

Input Volt.

36V

Load Current [A]	18V Efficiency [%]	24V Efficiency [%]	36V Efficiency [%]
0.08	59.2	55.7	45.9
0.16	68.4	66.0	58.5
0.24	71.8	70.2	64.5
0.32	73.3	72.1	67.8
0.40	73.8	73.2	69.8
0.44	73.8	73.5	70.5

Note: Slanted line shows the range of the rated load current.


2.Values

Load Current [A]	Efficiency [%]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.00	-	-	-
0.08	59.2	55.7	45.9
0.16	68.4	66.0	58.5
0.24	71.8	70.2	64.5
0.32	73.3	72.1	67.8
0.40	73.8	73.2	69.8
0.44	73.8	73.5	70.5
—	-	-	-
—	-	-	-
—	-	-	-
—	-	-	-

COSEL

Model	SUCS1R5243R3																																
Item	Line Regulation	Temperature	25°C																														
Object	+3.3V0.4A	Testing Circuitry	Figure A																														
1.Graph		2.Values																															
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <table><thead><tr><th>Input Voltage [V]</th><th>Output Voltage [V] Load 50%</th><th>Output Voltage [V] Load 100%</th></tr></thead><tbody><tr><td>16</td><td>3.299</td><td>3.296</td></tr><tr><td>18</td><td>3.299</td><td>3.296</td></tr><tr><td>20</td><td>3.299</td><td>3.297</td></tr><tr><td>24</td><td>3.298</td><td>3.297</td></tr><tr><td>30</td><td>3.298</td><td>3.297</td></tr><tr><td>36</td><td>3.298</td><td>3.298</td></tr><tr><td>40</td><td>3.299</td><td>3.298</td></tr><tr><td>—</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table> <p>Note: Slanted line shows the range of the rated input voltage.</p>		Input Voltage [V]	Output Voltage [V] Load 50%	Output Voltage [V] Load 100%	16	3.299	3.296	18	3.299	3.296	20	3.299	3.297	24	3.298	3.297	30	3.298	3.297	36	3.298	3.298	40	3.299	3.298	—	-	-	--	-	-		
Input Voltage [V]	Output Voltage [V] Load 50%	Output Voltage [V] Load 100%																															
16	3.299	3.296																															
18	3.299	3.296																															
20	3.299	3.297																															
24	3.298	3.297																															
30	3.298	3.297																															
36	3.298	3.298																															
40	3.299	3.298																															
—	-	-																															
--	-	-																															


COSEL

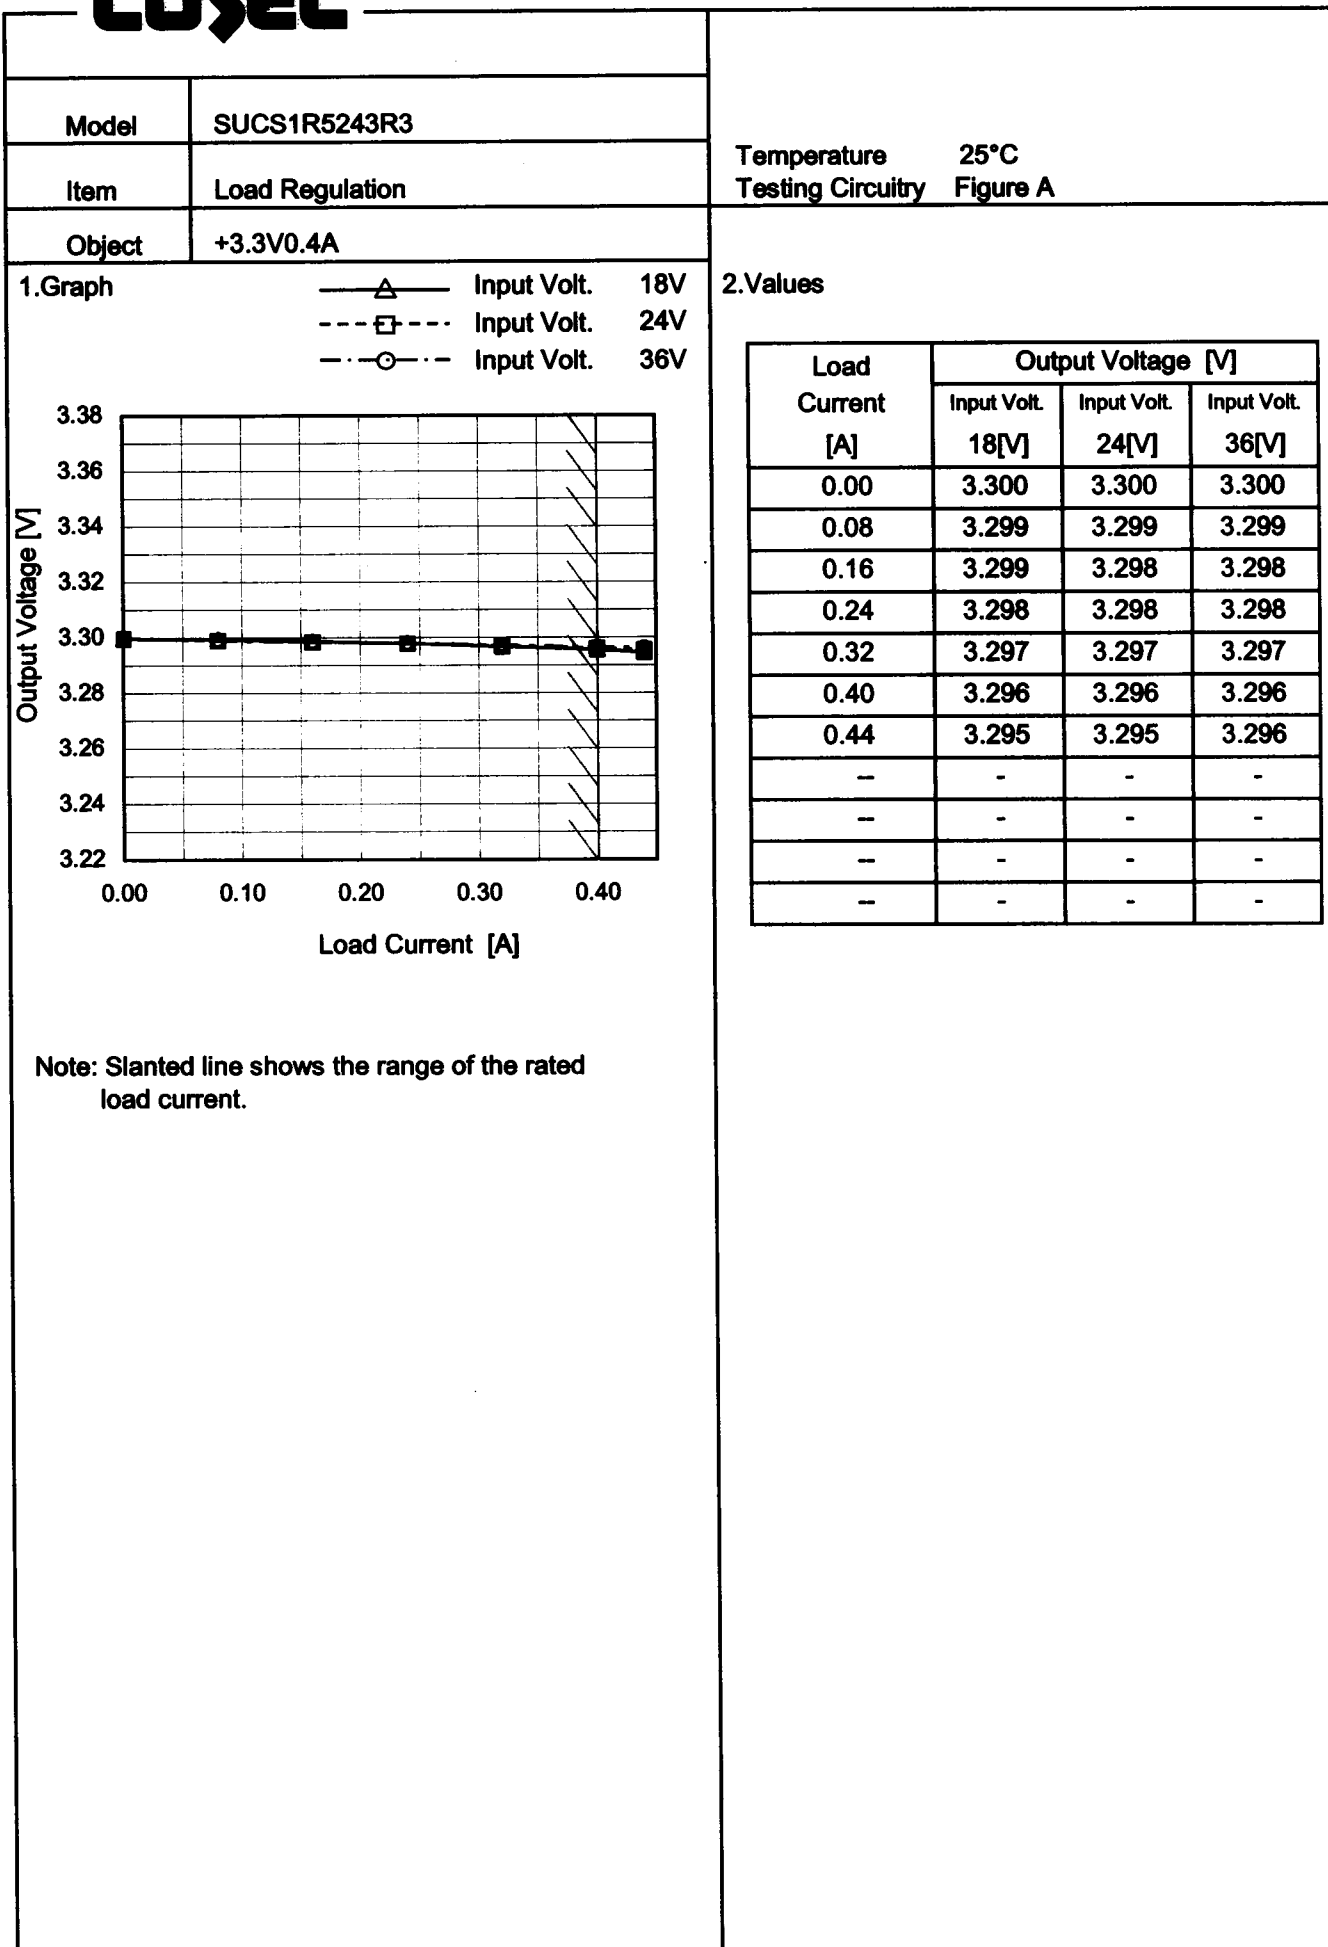


COSEL

Model	SUCS1R5243R3	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+3.3V0.4A		


Input Volt. 24 V
Cycle 100 mS

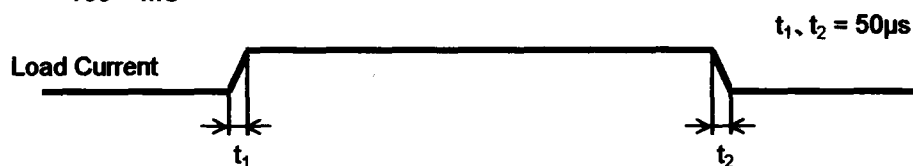

Min. Load (0A) \longleftrightarrow
Load 100% (0.4A)

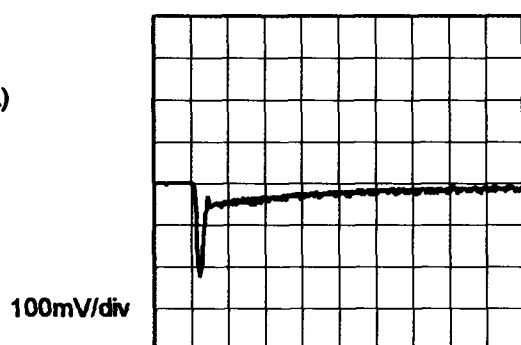


200µs/div

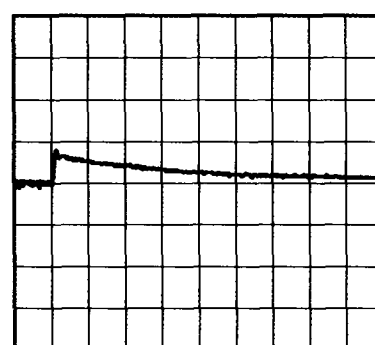


200µs/div

Min. Load (0A) \longleftrightarrow
Load 50% (0.2A)

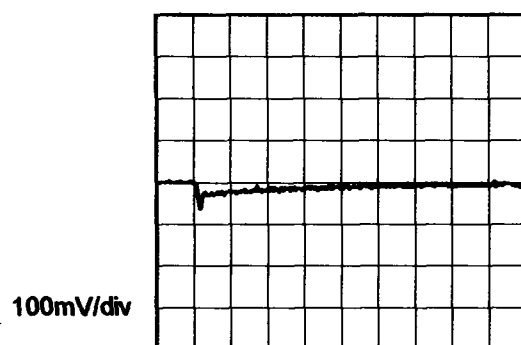


200µs/div

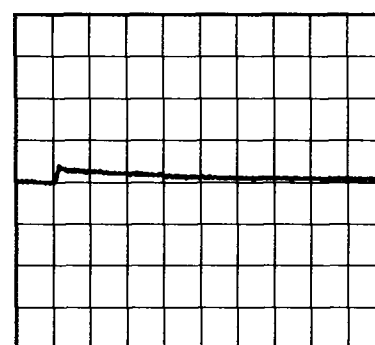


200µs/div


Load 50% (0.2A) \longleftrightarrow
Load 100% (0.4A)

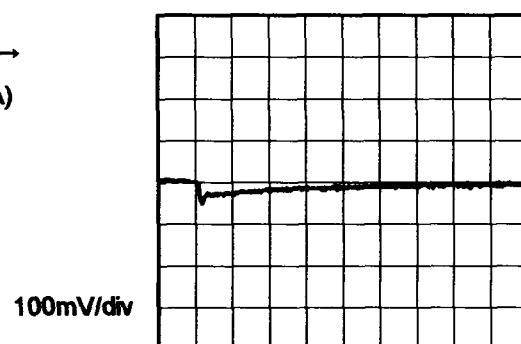

200µs/div

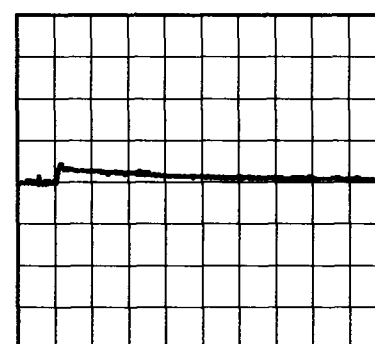

200µs/div

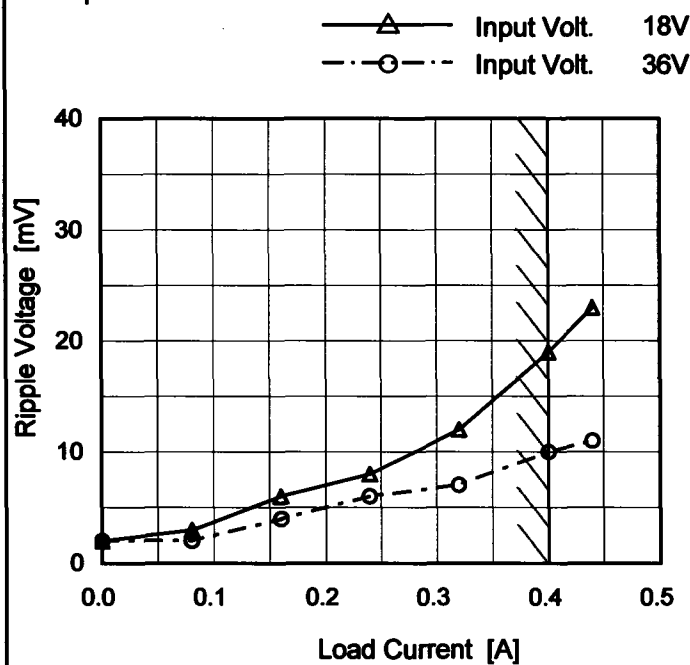COSEL**Model****SUCS1R5243R3****Item****Ripple Voltage (by Load Current)****Object****+3.3V0.4A****Temperature****25°C****Testing Circuitry****Figure B****1. Graph**


Measured by 100 MHz Oscilloscope.


Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.00	2	2
0.08	3	2
0.16	6	4
0.24	8	6
0.32	12	7
0.40	19	10
0.44	23	11
—	—	—
—	—	—
—	—	—
—	—	—

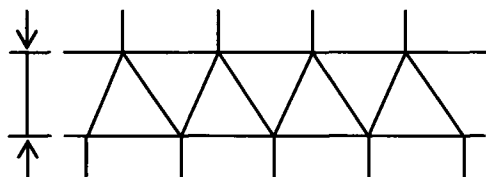Ripple [mVp-p]**Fig. Complex Ripple Wave Form**

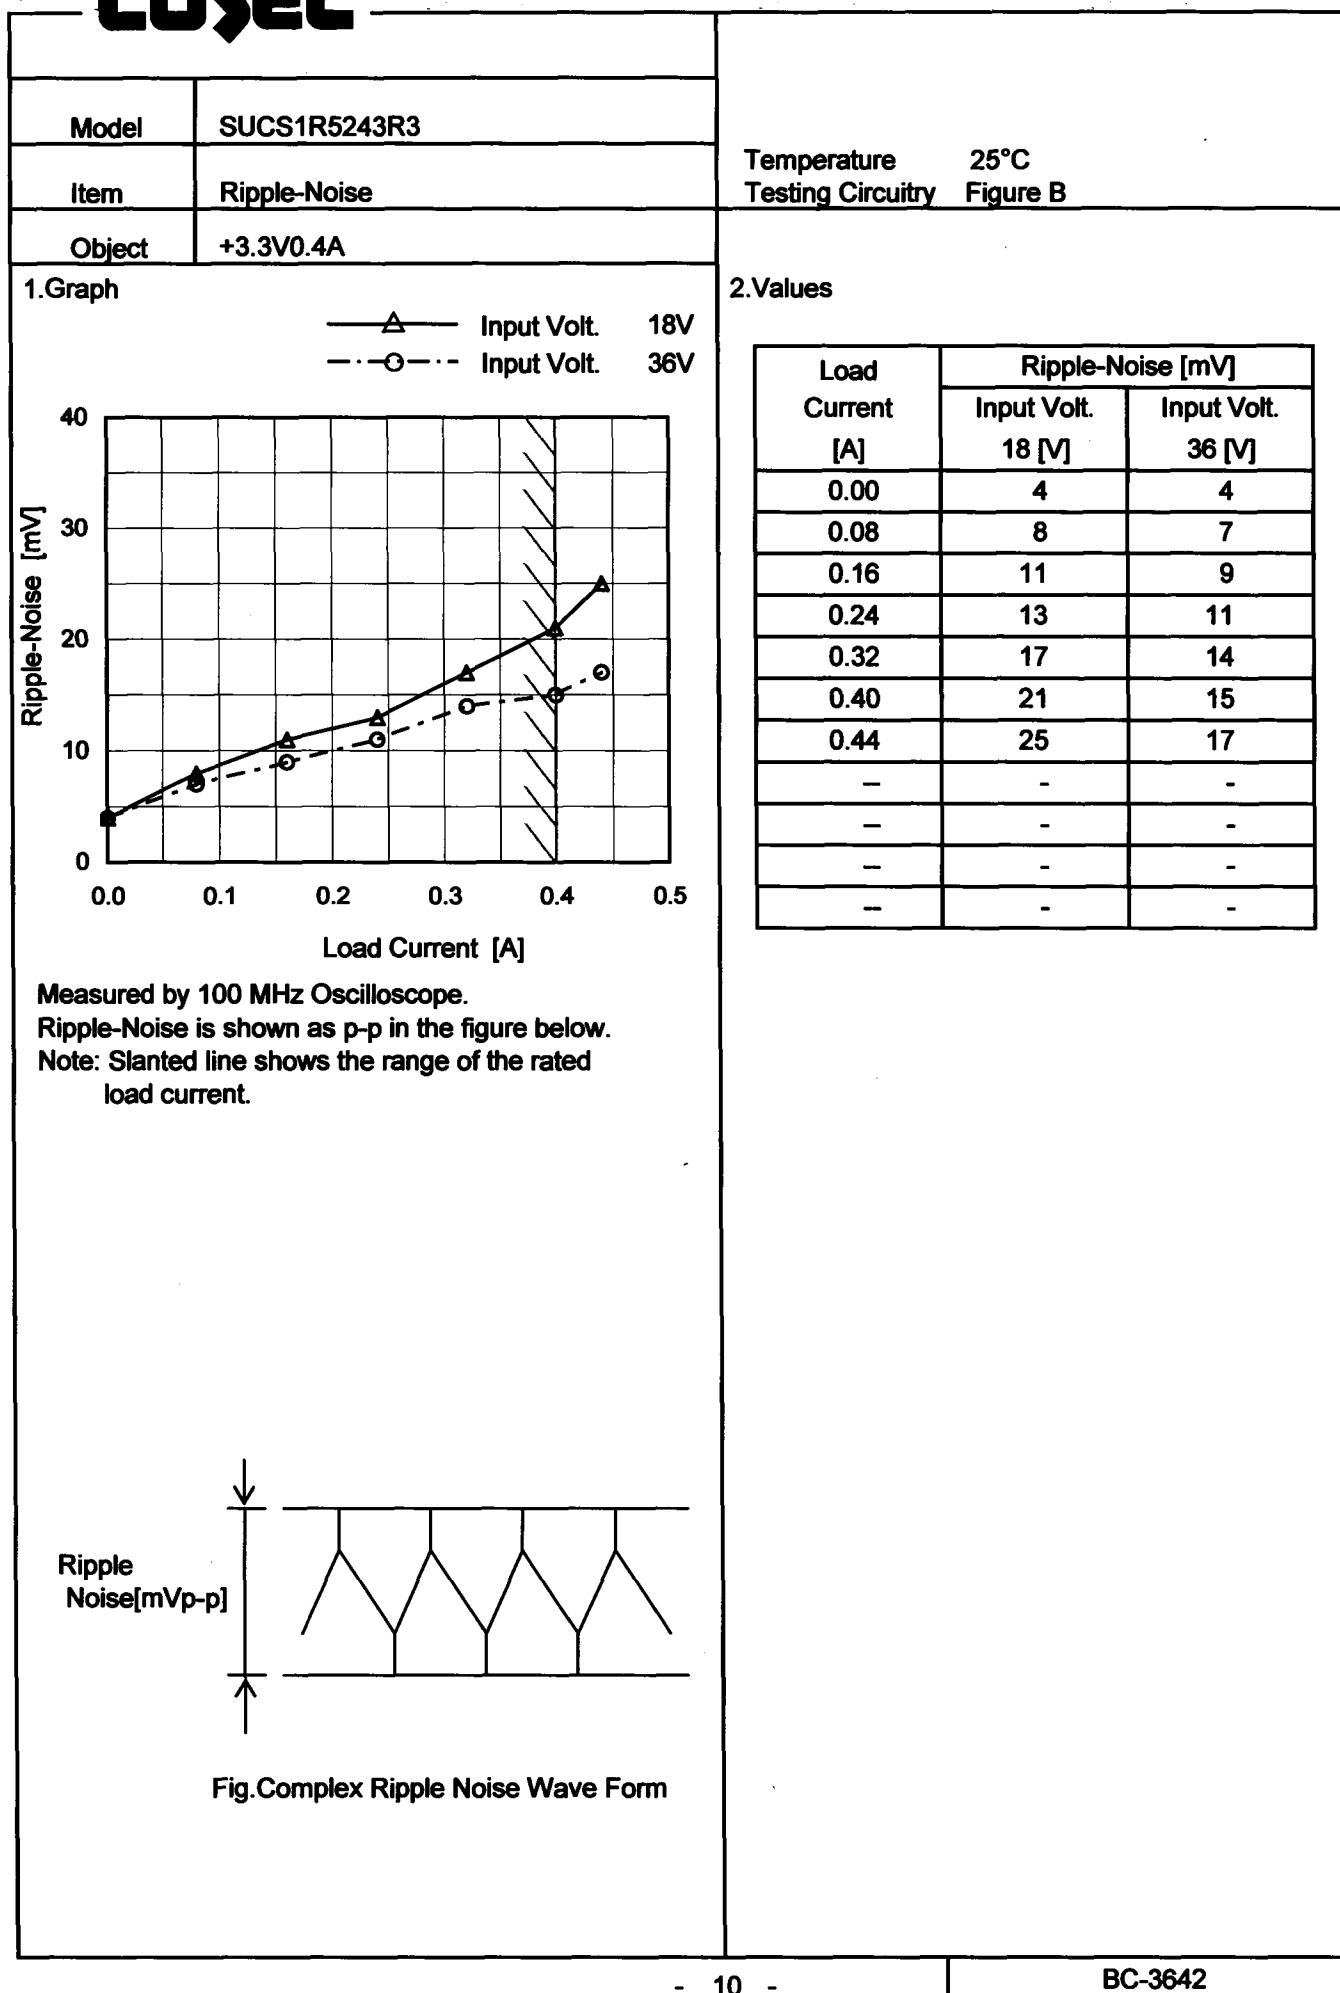COSEL

COSEL

Model

SUCS1R5243R3

Item


Ripple Voltage (by Ambient Temp.)

Object

+3.3V0.4A

Testing Circuitry Figure B

1. Graph

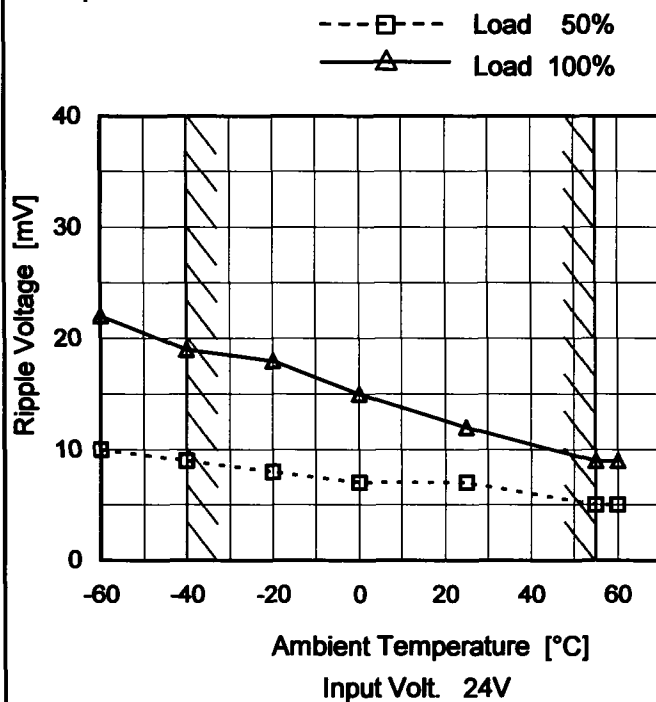

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	10	22
-40	9	19
-20	8	18
0	7	15
25	7	12
55	5	9
60	5	9
—	—	—
—	—	—
—	—	—
—	—	—

Testing Circuitry Figure A



Note: Slanted line shows the range of the rated ambient temperature.

COSEL

		Testing Circuitry Figure A
Model	SUCS1R5243R3	
Item	Output Voltage Accuracy	
Object	+3.3V0.4A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 18 - 36V

Load Current : 0 - 0.4A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	55	36	0	3.304	±14	±0.4
Minimum Voltage	-40	18	0.4	3.277		


COSEL

Model		SUCS1R5243R3	
Item		Time Lapse Drift	
Object		+3.3V0.4A	

1.Graph

Output Voltage [V]


<

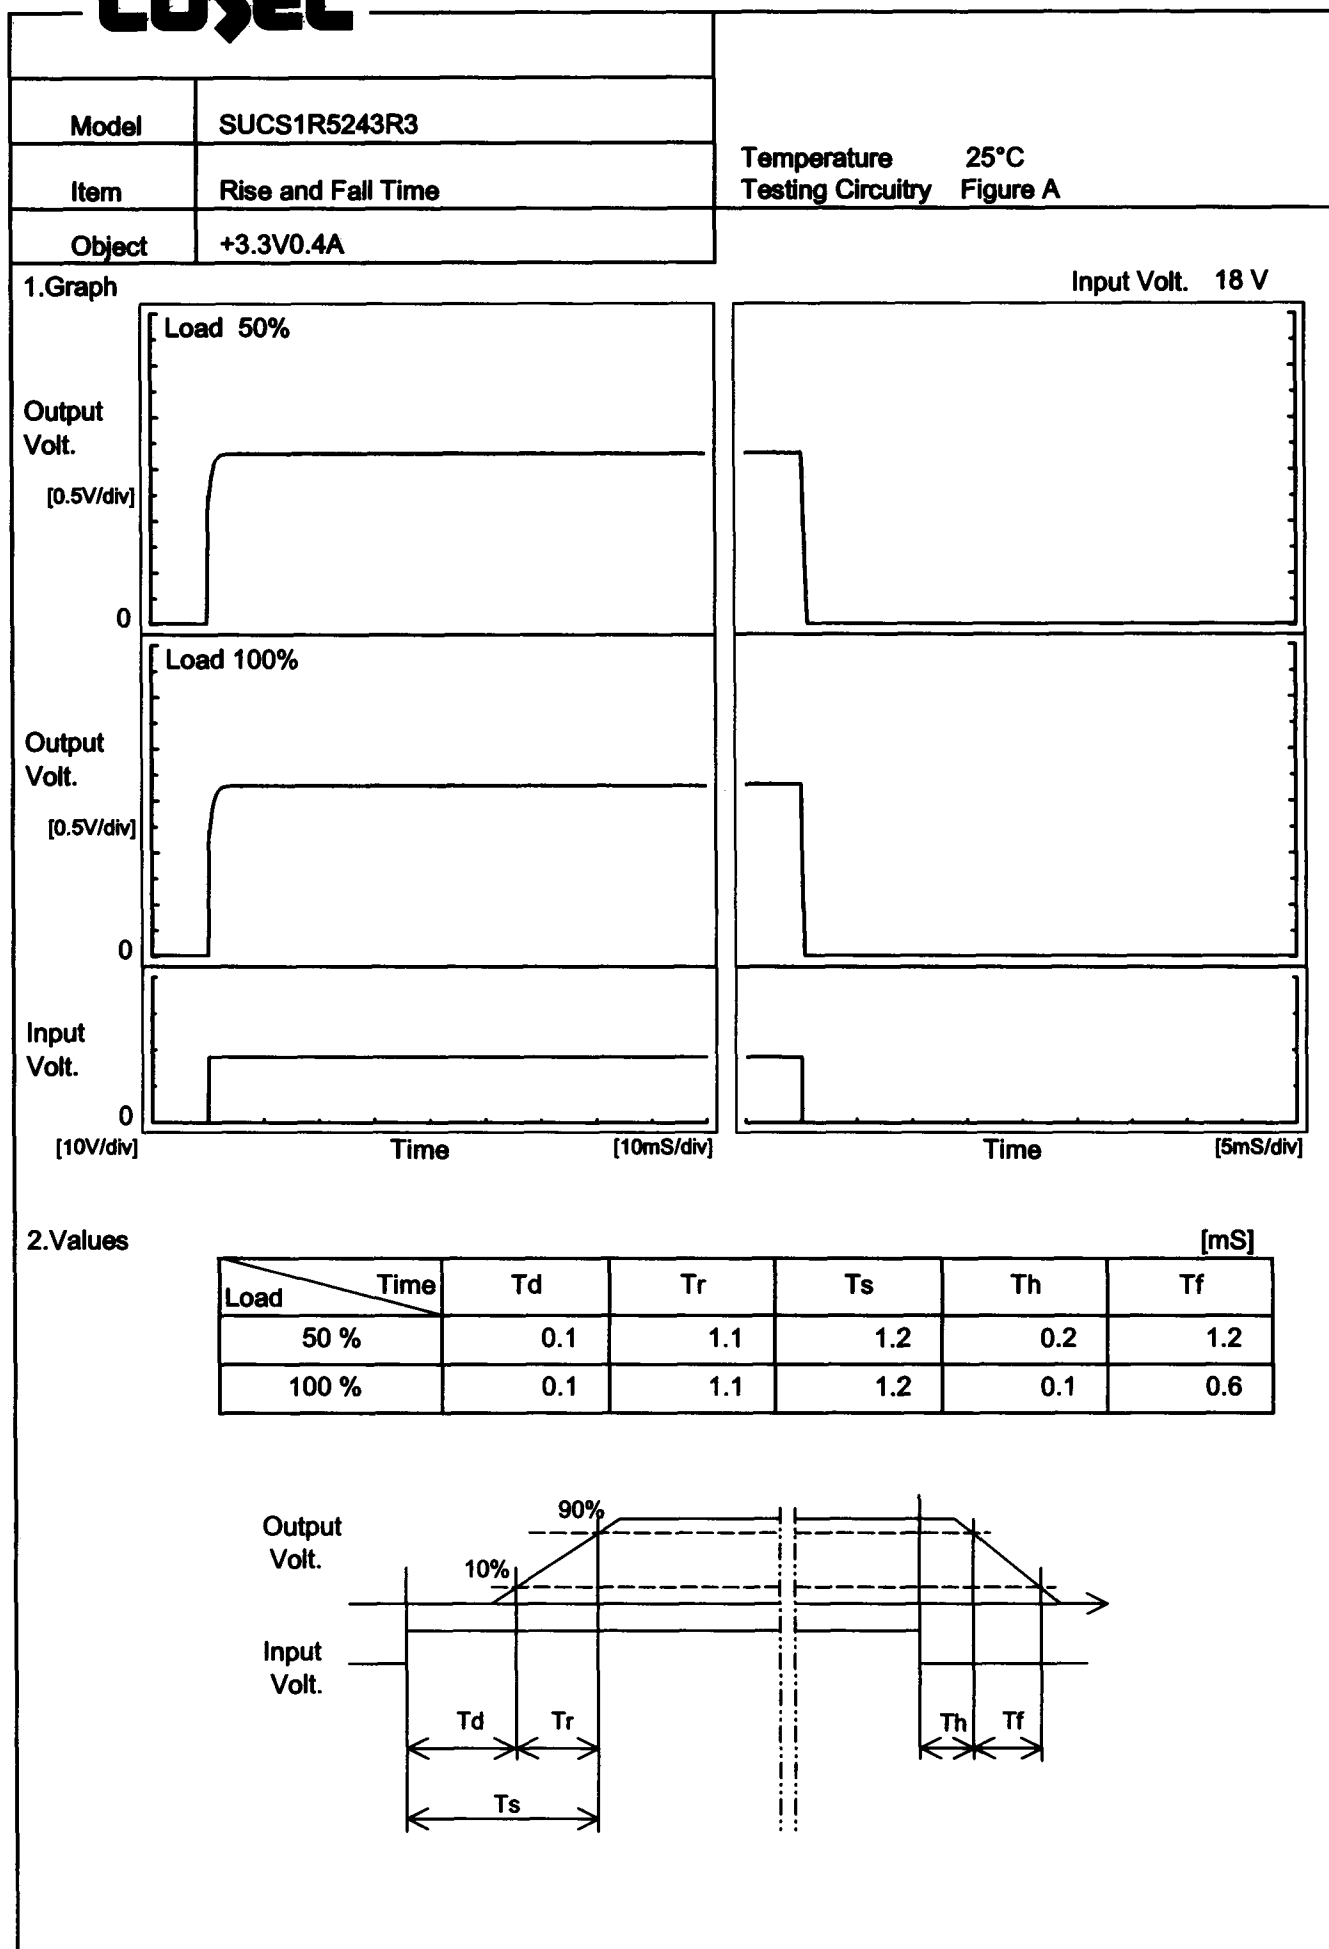COSEL

COSEL

Model	SUCS1R5243R3
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+3.3V0.4A

1. Graph

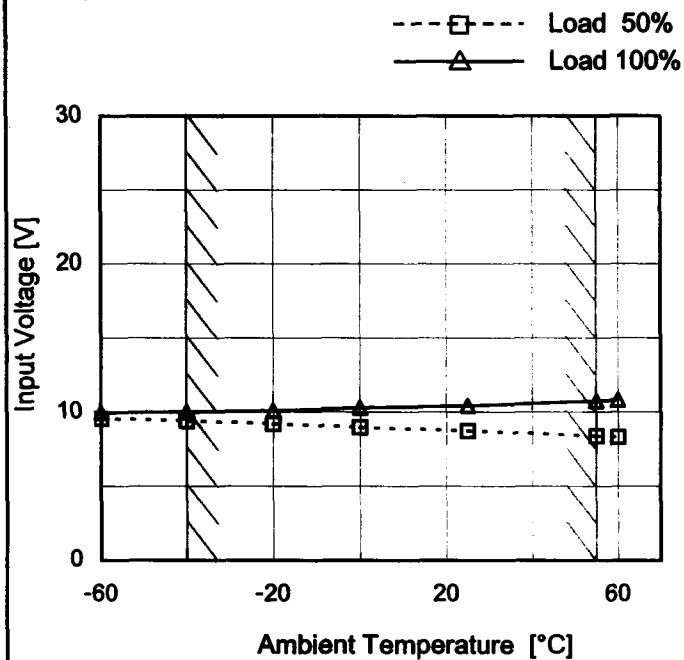

Note: Slanted line shows the range of the rated ambient temperature.


Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	9.6	10.0
-40	9.4	10.1
-20	9.2	10.1
0	9.0	10.4
25	8.8	10.5
55	8.4	10.8
60	8.4	10.9
-	-	-
-	-	-
-	-	-
-	-	-

Temperature 25°C
Testing Circuitry Figure A

_____	Input Volt.	18V
_____	Input Volt.	24V
_____	Input Volt.	36V



Output Voltage [V]	Load Current [A]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
3.30	0.40	0.40	0.40
3.14	0.67	0.66	0.60
2.97	0.69	0.67	0.61
2.64	0.73	0.71	0.64
2.31	0.77	0.74	0.67
1.98	0.81	0.77	0.70
1.65	0.85	0.81	0.73
1.32	0.89	0.83	0.75
0.99	0.93	0.85	0.77
0.66	0.96	0.86	0.78
0.33	0.97	0.86	0.79
0.00	1.02	0.89	0.85

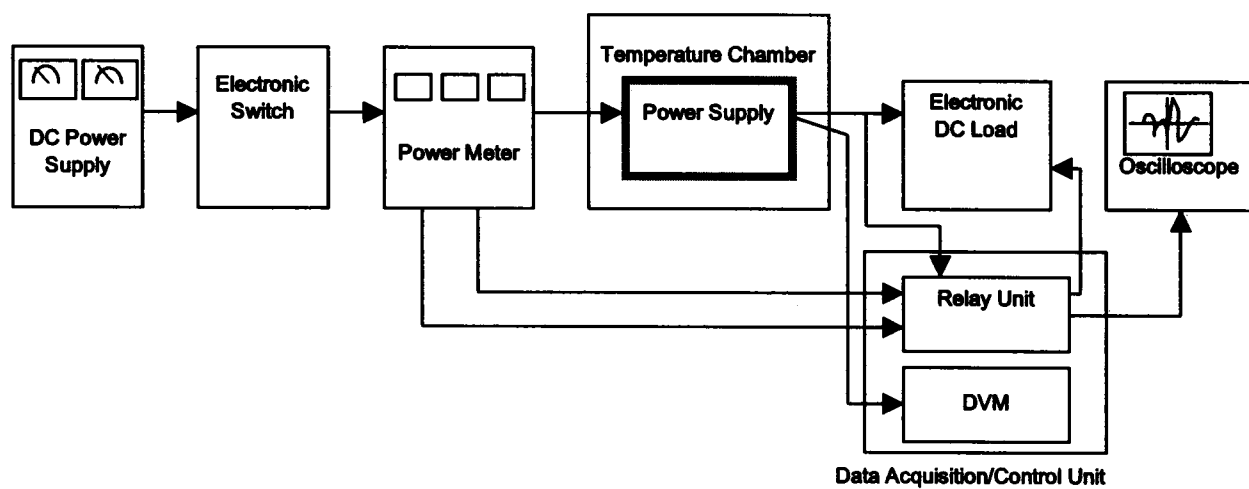


Figure A

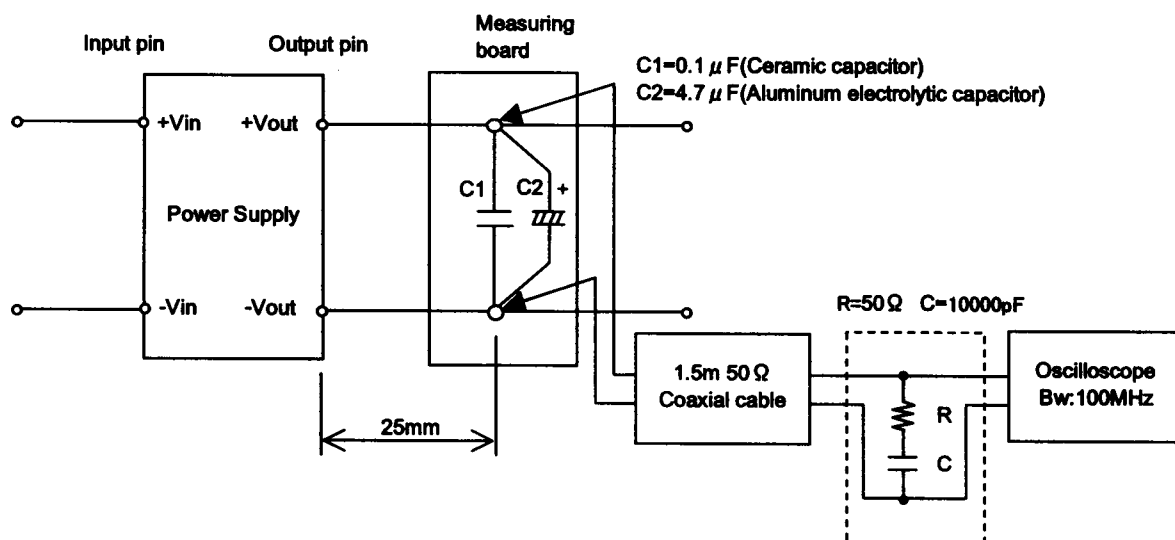


Figure B (Ripple and Ripple noise Characteristic)