

TEST DATA OF SUTS32405

Regulated DC Power Supply
February 18, 2009

Approved by : Kazunari Asano
Kazunari Asano Design Manager


Prepared by : Sho Saito
Sho Saito Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Input Voltage)	1
2.Input Current (by Load Current)	2
3.Input Power (by Load Current)	3
4.Efficiency (by Input Voltage)	4
5.Efficiency (by Load Current)	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple Voltage (by Load Current)	9
10.Ripple-Noise	10
11.Ripple Voltage (by Ambient Temperature)	11
12.Ambient Temperature Drift	12
13.Output Voltage Accuracy	13
14.Time Lapse Drift	14
15.Rise and Fall Time	15
16.Minimum Input Voltage for Regulated Output Voltage	16
17.Overcurrent Protection	17
18.Figure of Testing Circuitry	18

(Final Page 18)

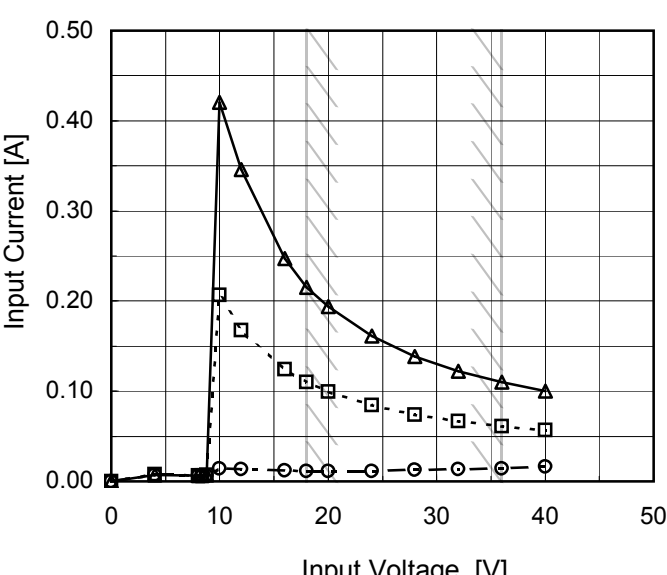Model		SUTS32405		Temperature 25°C																																																																																
Item		Input Current (by Input Voltage)		Testing Circuitry Figure A																																																																																
Object																																																																																				
1.Graph		<div><div><div>—△—</div><div>Load 100%</div></div><div><div>---□---</div><div>Load 50%</div></div><div><div>-·-○-·-</div><div>Load 0%</div></div></div>  <p>Note: Slanted line shows the range of the rated input voltage.</p>		2.Values																																																																																
		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Load 0%</th><th>Load 50%</th><th>Load 100%</th></tr><tr><td>0.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr><tr><td>4.0</td><td>0.007</td><td>0.008</td><td>0.007</td></tr><tr><td>8.0</td><td>0.007</td><td>0.007</td><td>0.007</td></tr><tr><td>8.4</td><td>0.007</td><td>0.007</td><td>0.007</td></tr><tr><td>8.8</td><td>0.007</td><td>0.007</td><td>0.007</td></tr><tr><td>10.0</td><td>0.015</td><td>0.206</td><td>0.421</td></tr><tr><td>12.0</td><td>0.014</td><td>0.167</td><td>0.346</td></tr><tr><td>16.0</td><td>0.012</td><td>0.124</td><td>0.247</td></tr><tr><td>18.0</td><td>0.012</td><td>0.110</td><td>0.215</td></tr><tr><td>20.0</td><td>0.012</td><td>0.100</td><td>0.194</td></tr><tr><td>24.0</td><td>0.012</td><td>0.085</td><td>0.161</td></tr><tr><td>28.0</td><td>0.013</td><td>0.074</td><td>0.139</td></tr><tr><td>32.0</td><td>0.013</td><td>0.067</td><td>0.122</td></tr><tr><td>36.0</td><td>0.015</td><td>0.061</td><td>0.110</td></tr><tr><td>40.0</td><td>0.016</td><td>0.057</td><td>0.100</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>				Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.0	0.000	0.000	0.000	4.0	0.007	0.008	0.007	8.0	0.007	0.007	0.007	8.4	0.007	0.007	0.007	8.8	0.007	0.007	0.007	10.0	0.015	0.206	0.421	12.0	0.014	0.167	0.346	16.0	0.012	0.124	0.247	18.0	0.012	0.110	0.215	20.0	0.012	0.100	0.194	24.0	0.012	0.085	0.161	28.0	0.013	0.074	0.139	32.0	0.013	0.067	0.122	36.0	0.015	0.061	0.110	40.0	0.016	0.057	0.100	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																			
	Load 0%	Load 50%	Load 100%																																																																																	
0.0	0.000	0.000	0.000																																																																																	
4.0	0.007	0.008	0.007																																																																																	
8.0	0.007	0.007	0.007																																																																																	
8.4	0.007	0.007	0.007																																																																																	
8.8	0.007	0.007	0.007																																																																																	
10.0	0.015	0.206	0.421																																																																																	
12.0	0.014	0.167	0.346																																																																																	
16.0	0.012	0.124	0.247																																																																																	
18.0	0.012	0.110	0.215																																																																																	
20.0	0.012	0.100	0.194																																																																																	
24.0	0.012	0.085	0.161																																																																																	
28.0	0.013	0.074	0.139																																																																																	
32.0	0.013	0.067	0.122																																																																																	
36.0	0.015	0.061	0.110																																																																																	
40.0	0.016	0.057	0.100																																																																																	
--	-	-	-																																																																																	
--	-	-	-																																																																																	
--	-	-	-																																																																																	

Model	SUTS32405																																																					
Item	Input Current (by Load Current)	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>18V</div></div><div><div>---□---</div><div>Input Volt.</div><div>24V</div></div><div><div>---○---</div><div>Input Volt.</div><div>36V</div></div></div> <p>Input Current [A]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>0.00</td><td>0.012</td><td>0.012</td><td>0.015</td></tr><tr><td>0.12</td><td>0.050</td><td>0.040</td><td>0.033</td></tr><tr><td>0.24</td><td>0.090</td><td>0.070</td><td>0.052</td></tr><tr><td>0.36</td><td>0.130</td><td>0.099</td><td>0.071</td></tr><tr><td>0.48</td><td>0.172</td><td>0.130</td><td>0.090</td></tr><tr><td>0.60</td><td>0.215</td><td>0.161</td><td>0.110</td></tr><tr><td>0.66</td><td>0.237</td><td>0.177</td><td>0.120</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.012	0.012	0.015	0.12	0.050	0.040	0.033	0.24	0.090	0.070	0.052	0.36	0.130	0.099	0.071	0.48	0.172	0.130	0.090	0.60	0.215	0.161	0.110	0.66	0.237	0.177	0.120	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	0.012	0.012	0.015																																																			
0.12	0.050	0.040	0.033																																																			
0.24	0.090	0.070	0.052																																																			
0.36	0.130	0.099	0.071																																																			
0.48	0.172	0.130	0.090																																																			
0.60	0.215	0.161	0.110																																																			
0.66	0.237	0.177	0.120																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

Model	SUTS32405																																																					
Item	Input Power (by Load Current)	Temperature	25°C																																																			
Object	_____	Testing Circuitry	Figure A																																																			
1.Graph		2.Values																																																				
<div><div>—△—</div><div>---□---</div><div>-·-○-·-</div></div> <div><div>Input Volt.</div><div>Input Volt.</div><div>Input Volt.</div></div> <div><div>18V</div><div>24V</div><div>36V</div></div> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>0.00</td><td>0.19</td><td>0.26</td><td>0.49</td></tr><tr><td>0.12</td><td>0.90</td><td>0.96</td><td>1.17</td></tr><tr><td>0.24</td><td>1.61</td><td>1.66</td><td>1.85</td></tr><tr><td>0.36</td><td>2.35</td><td>2.38</td><td>2.54</td></tr><tr><td>0.48</td><td>3.11</td><td>3.11</td><td>3.24</td></tr><tr><td>0.60</td><td>3.88</td><td>3.85</td><td>3.96</td></tr><tr><td>0.66</td><td>4.29</td><td>4.24</td><td>4.32</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.19	0.26	0.49	0.12	0.90	0.96	1.17	0.24	1.61	1.66	1.85	0.36	2.35	2.38	2.54	0.48	3.11	3.11	3.24	0.60	3.88	3.85	3.96	0.66	4.29	4.24	4.32	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	0.19	0.26	0.49																																																			
0.12	0.90	0.96	1.17																																																			
0.24	1.61	1.66	1.85																																																			
0.36	2.35	2.38	2.54																																																			
0.48	3.11	3.11	3.24																																																			
0.60	3.88	3.85	3.96																																																			
0.66	4.29	4.24	4.32																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

Model	SUTS32405																																		
Item	Efficiency (by Input Voltage)	Temperature	25°C																																
		Testing Circuitry	Figure A																																
Object																																			
1.Graph		2.Values																																	
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <table><thead><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>16</td><td>77.1</td><td>77.6</td></tr><tr><td>18</td><td>77.0</td><td>78.4</td></tr><tr><td>20</td><td>76.7</td><td>78.8</td></tr><tr><td>24</td><td>75.6</td><td>78.9</td></tr><tr><td>30</td><td>72.8</td><td>78.2</td></tr><tr><td>36</td><td>69.5</td><td>77.0</td></tr><tr><td>40</td><td>67.1</td><td>75.6</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	16	77.1	77.6	18	77.0	78.4	20	76.7	78.8	24	75.6	78.9	30	72.8	78.2	36	69.5	77.0	40	67.1	75.6	--	-	-	--	-	-		
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
16	77.1	77.6																																	
18	77.0	78.4																																	
20	76.7	78.8																																	
24	75.6	78.9																																	
30	72.8	78.2																																	
36	69.5	77.0																																	
40	67.1	75.6																																	
--	-	-																																	
--	-	-																																	
Note: Slanted line shows the range of the rated input voltage.																																			

Model	SUTS32405																																																					
Item	Efficiency (by Load Current)	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph		2.Values																																																				
<div><div>—△— Input Volt. 18V</div><div>---□--- Input Volt. 24V</div><div>-·-○-·- Input Volt. 36V</div></div> <p>Efficiency [%]</p> <p>Load Current [A]</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr><tr><td>0.12</td><td>67.9</td><td>63.5</td><td>51.9</td></tr><tr><td>0.24</td><td>75.4</td><td>73.2</td><td>65.7</td></tr><tr><td>0.36</td><td>77.8</td><td>76.7</td><td>71.8</td></tr><tr><td>0.48</td><td>78.3</td><td>78.3</td><td>75.1</td></tr><tr><td>0.60</td><td>78.3</td><td>78.9</td><td>76.8</td></tr><tr><td>0.66</td><td>77.9</td><td>78.9</td><td>77.4</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Efficiency [%]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	-	-	-	0.12	67.9	63.5	51.9	0.24	75.4	73.2	65.7	0.36	77.8	76.7	71.8	0.48	78.3	78.3	75.1	0.60	78.3	78.9	76.8	0.66	77.9	78.9	77.4	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	-	-	-																																																			
0.12	67.9	63.5	51.9																																																			
0.24	75.4	73.2	65.7																																																			
0.36	77.8	76.7	71.8																																																			
0.48	78.3	78.3	75.1																																																			
0.60	78.3	78.9	76.8																																																			
0.66	77.9	78.9	77.4																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						


Model	SUTS32405																																		
Item	Line Regulation	Temperature	25°C																																
		Testing Circuitry	Figure A																																
Object	+5V0.6A																																		
1.Graph		2.Values																																	
<div><div><div>---</div><div>□</div><div>---</div><div>Load 50%</div></div><div><div>—</div><div>△</div><div>—</div><div>Load 100%</div></div></div> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>16</td><td>5.070</td><td>5.067</td></tr><tr><td>18</td><td>5.070</td><td>5.067</td></tr><tr><td>20</td><td>5.070</td><td>5.067</td></tr><tr><td>24</td><td>5.070</td><td>5.067</td></tr><tr><td>30</td><td>5.070</td><td>5.067</td></tr><tr><td>36</td><td>5.069</td><td>5.067</td></tr><tr><td>40</td><td>5.069</td><td>5.067</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	16	5.070	5.067	18	5.070	5.067	20	5.070	5.067	24	5.070	5.067	30	5.070	5.067	36	5.069	5.067	40	5.069	5.067	--	-	-	--	-	-
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
16	5.070	5.067																																	
18	5.070	5.067																																	
20	5.070	5.067																																	
24	5.070	5.067																																	
30	5.070	5.067																																	
36	5.069	5.067																																	
40	5.069	5.067																																	
--	-	-																																	
--	-	-																																	

Model	SUTS32405																																																					
Item	Load Regulation	Temperature	25°C																																																			
Object	+5V0.6A	Testing Circuitry	Figure A																																																			
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>18V</div></div><div><div>---□---</div><div>Input Volt.</div><div>24V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>36V</div></div></div> <div><div>Output Voltage [V]</div><div><div>5.14</div><div>5.12</div><div>5.10</div><div>5.08</div><div>5.06</div><div>5.04</div><div>5.02</div><div>5.00</div></div><div><div>0.0</div><div>0.2</div><div>0.4</div><div>0.6</div></div><div>Load Current [A]</div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>0.00</td><td>5.073</td><td>5.072</td><td>5.073</td></tr><tr><td>0.12</td><td>5.072</td><td>5.071</td><td>5.071</td></tr><tr><td>0.24</td><td>5.070</td><td>5.070</td><td>5.070</td></tr><tr><td>0.36</td><td>5.069</td><td>5.069</td><td>5.069</td></tr><tr><td>0.48</td><td>5.068</td><td>5.068</td><td>5.068</td></tr><tr><td>0.60</td><td>5.067</td><td>5.067</td><td>5.067</td></tr><tr><td>0.66</td><td>5.067</td><td>5.067</td><td>5.066</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	5.073	5.072	5.073	0.12	5.072	5.071	5.071	0.24	5.070	5.070	5.070	0.36	5.069	5.069	5.069	0.48	5.068	5.068	5.068	0.60	5.067	5.067	5.067	0.66	5.067	5.067	5.066	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	5.073	5.072	5.073																																																			
0.12	5.072	5.071	5.071																																																			
0.24	5.070	5.070	5.070																																																			
0.36	5.069	5.069	5.069																																																			
0.48	5.068	5.068	5.068																																																			
0.60	5.067	5.067	5.067																																																			
0.66	5.067	5.067	5.066																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						





Model		SUTS32405	Temperature 25°C Testing Circuitry Figure A
Item		Dynamic Load Response	
Object		+5V0.6A	



Input Volt. 12 V
Cycle 100 mS

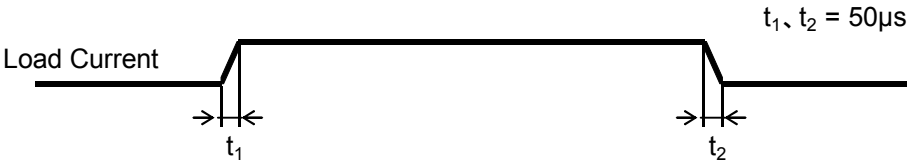



Min. Load (0A) \longleftrightarrow
Load 100% (0.6A)

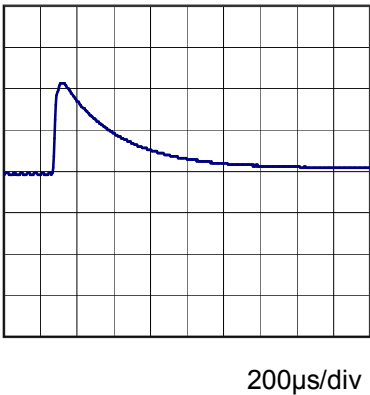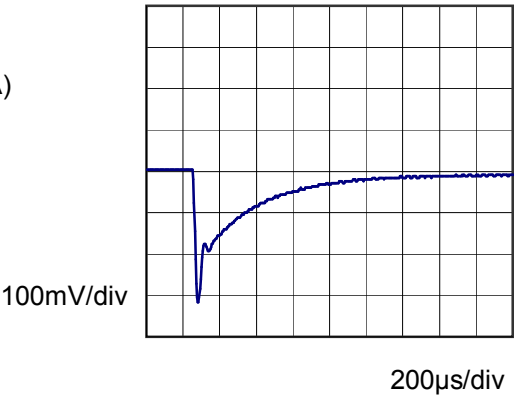

Min. Load (0A) \longleftrightarrow
Load 50% (0.3A)

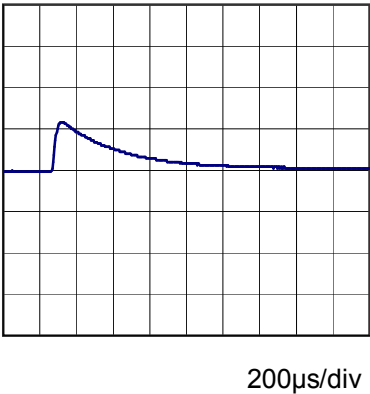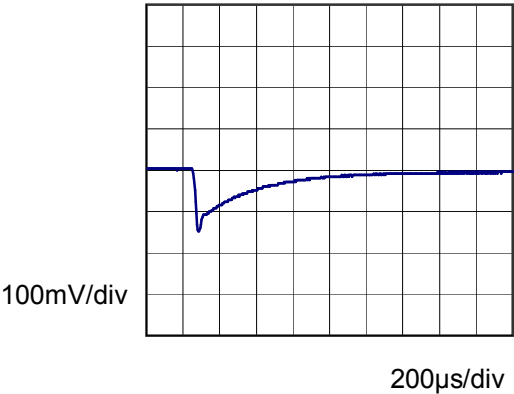

Load 50% (0.3A) \longleftrightarrow
Load 100% (0.6A)

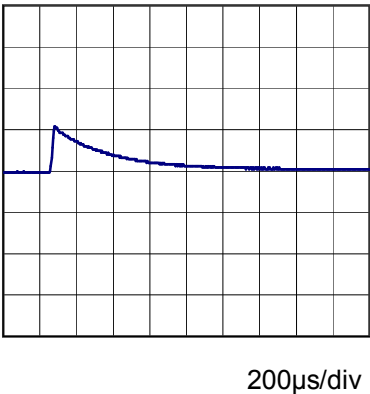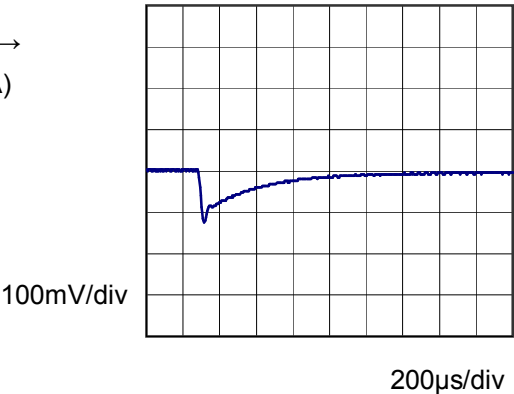

Model	SUTS32405																																								
Item	Ripple Voltage (by Load Current)	Temperature	25°C																																						
		Testing Circuitry	Figure B																																						
Object	+5V0.6A																																								
1.Graph		2.Values																																							
<div><div><div>—△—</div><div>Input Volt.</div><div>18V</div></div><div><div>- -○- -</div><div>Input Volt.</div><div>36V</div></div></div> <p>Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple Voltage [mV]</th></tr><tr><th>Input Volt. 18 [V]</th><th>Input Volt. 36 [V]</th></tr><tr><td>0.00</td><td>4</td><td>4</td></tr><tr><td>0.12</td><td>7</td><td>4</td></tr><tr><td>0.24</td><td>11</td><td>5</td></tr><tr><td>0.36</td><td>15</td><td>7</td></tr><tr><td>0.48</td><td>20</td><td>9</td></tr><tr><td>0.60</td><td>26</td><td>12</td></tr><tr><td>0.66</td><td>31</td><td>15</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple Voltage [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.00	4	4	0.12	7	4	0.24	11	5	0.36	15	7	0.48	20	9	0.60	26	12	0.66	31	15	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																								
	Input Volt. 18 [V]	Input Volt. 36 [V]																																							
0.00	4	4																																							
0.12	7	4																																							
0.24	11	5																																							
0.36	15	7																																							
0.48	20	9																																							
0.60	26	12																																							
0.66	31	15																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<p>Ripple [mVp-p]</p> <p>Fig.Complex Ripple Wave Form</p>																																									

Model	SUTS32405																																								
Item	Ripple-Noise	Temperature	25°C																																						
		Testing Circuitry	Figure B																																						
Object	+5V0.6A																																								
1.Graph		2.Values																																							
<div><div><div>—△— Input Volt. 18V</div><div>- -○- - Input Volt. 36V</div></div><p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple-Noise [mV]</th></tr><tr><th>Input Volt. 18 [V]</th><th>Input Volt. 36 [V]</th></tr><tr><td>0.00</td><td>5</td><td>5</td></tr><tr><td>0.12</td><td>14</td><td>13</td></tr><tr><td>0.24</td><td>23</td><td>18</td></tr><tr><td>0.36</td><td>31</td><td>24</td></tr><tr><td>0.48</td><td>39</td><td>30</td></tr><tr><td>0.60</td><td>56</td><td>35</td></tr><tr><td>0.66</td><td>67</td><td>39</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple-Noise [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.00	5	5	0.12	14	13	0.24	23	18	0.36	31	24	0.48	39	30	0.60	56	35	0.66	67	39	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 18 [V]	Input Volt. 36 [V]																																							
0.00	5	5																																							
0.12	14	13																																							
0.24	23	18																																							
0.36	31	24																																							
0.48	39	30																																							
0.60	56	35																																							
0.66	67	39																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<div><div><div><div></div><div></div></div><div>Ripple Noise[mVp-p]</div></div><p>Fig.Complex Ripple Noise Wave Form</p></div>																																									

Model	SUTS32405																																								
Item	Ripple Voltage (by Ambient Temp.)	Testing Circuitry Figure B																																							
Object	+5V0.6A																																								
1.Graph		2.Values																																							
<div><div>---□--- Load 50%</div><div>—△— Load 100%</div></div> <p>Measured by 100 MHz Oscilloscope. Note: Slanted line shows the range of the rated ambient temperature.</p>		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Ripple Voltage [mV]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>-60</td><td>10</td><td>22</td></tr><tr><td>-40</td><td>10</td><td>22</td></tr><tr><td>-20</td><td>10</td><td>21</td></tr><tr><td>0</td><td>9</td><td>20</td></tr><tr><td>25</td><td>8</td><td>20</td></tr><tr><td>55</td><td>8</td><td>18</td></tr><tr><td>60</td><td>7</td><td>18</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-60	10	22	-40	10	22	-20	10	21	0	9	20	25	8	20	55	8	18	60	7	18	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																								
	Load 50%	Load 100%																																							
-60	10	22																																							
-40	10	22																																							
-20	10	21																																							
0	9	20																																							
25	8	20																																							
55	8	18																																							
60	7	18																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							

Model	SUTS32405																																																						
Item	Ambient Temperature Drift	Testing Circuitry Figure A																																																					
Object	+5V0.6A																																																						
1.Graph		2.Values																																																					
<div><div>—△— Input Volt. 18V</div><div>---□--- Input Volt. 24V</div><div>-·-○-·- Input Volt. 36V</div></div> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>-60</td><td>5.030</td><td>5.031</td><td>5.031</td></tr><tr><td>-40</td><td>5.042</td><td>5.043</td><td>5.043</td></tr><tr><td>-20</td><td>5.052</td><td>5.052</td><td>5.052</td></tr><tr><td>0</td><td>5.060</td><td>5.060</td><td>5.060</td></tr><tr><td>25</td><td>5.066</td><td>5.066</td><td>5.066</td></tr><tr><td>55</td><td>5.070</td><td>5.070</td><td>5.070</td></tr><tr><td>60</td><td>5.070</td><td>5.070</td><td>5.070</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>			Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-60	5.030	5.031	5.031	-40	5.042	5.043	5.043	-20	5.052	5.052	5.052	0	5.060	5.060	5.060	25	5.066	5.066	5.066	55	5.070	5.070	5.070	60	5.070	5.070	5.070	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																						
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																				
-60	5.030	5.031	5.031																																																				
-40	5.042	5.043	5.043																																																				
-20	5.052	5.052	5.052																																																				
0	5.060	5.060	5.060																																																				
25	5.066	5.066	5.066																																																				
55	5.070	5.070	5.070																																																				
60	5.070	5.070	5.070																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				



Model		Testing Circuitry Figure A
SUTS32405		
Item	Output Voltage Accuracy	
Object	+5V0.6A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 18 - 36V

Load Current : 0 - 0.6A


* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$


* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	55	36	0	5.076	±17	±0.3
Minimum Voltage	-40	18	0.6	5.042		

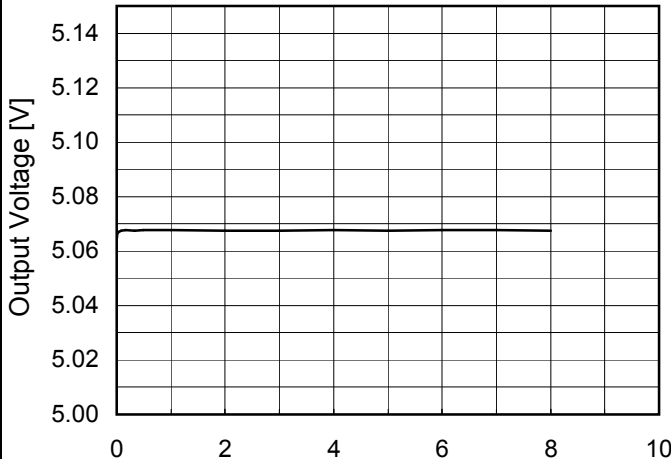

Model	SUTS32405																								
Item	Time Lapse Drift	Temperature	25°C																						
		Testing Circuitry	Figure A																						
Object	+5V0.6A																								
1.Graph		2.Values																							
<div><p>Output Voltage [V]</p><p>Time [H]</p><p>Input Volt. 24V</p><p>Load 100%</p></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>5.064</td></tr><tr><td>0.5</td><td>5.068</td></tr><tr><td>1.0</td><td>5.068</td></tr><tr><td>2.0</td><td>5.068</td></tr><tr><td>3.0</td><td>5.068</td></tr><tr><td>4.0</td><td>5.068</td></tr><tr><td>5.0</td><td>5.068</td></tr><tr><td>6.0</td><td>5.068</td></tr><tr><td>7.0</td><td>5.068</td></tr><tr><td>8.0</td><td>5.068</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	5.064	0.5	5.068	1.0	5.068	2.0	5.068	3.0	5.068	4.0	5.068	5.0	5.068	6.0	5.068	7.0	5.068	8.0	5.068
Time since start [H]	Output Voltage [V]																								
0.0	5.064																								
0.5	5.068																								
1.0	5.068																								
2.0	5.068																								
3.0	5.068																								
4.0	5.068																								
5.0	5.068																								
6.0	5.068																								
7.0	5.068																								
8.0	5.068																								

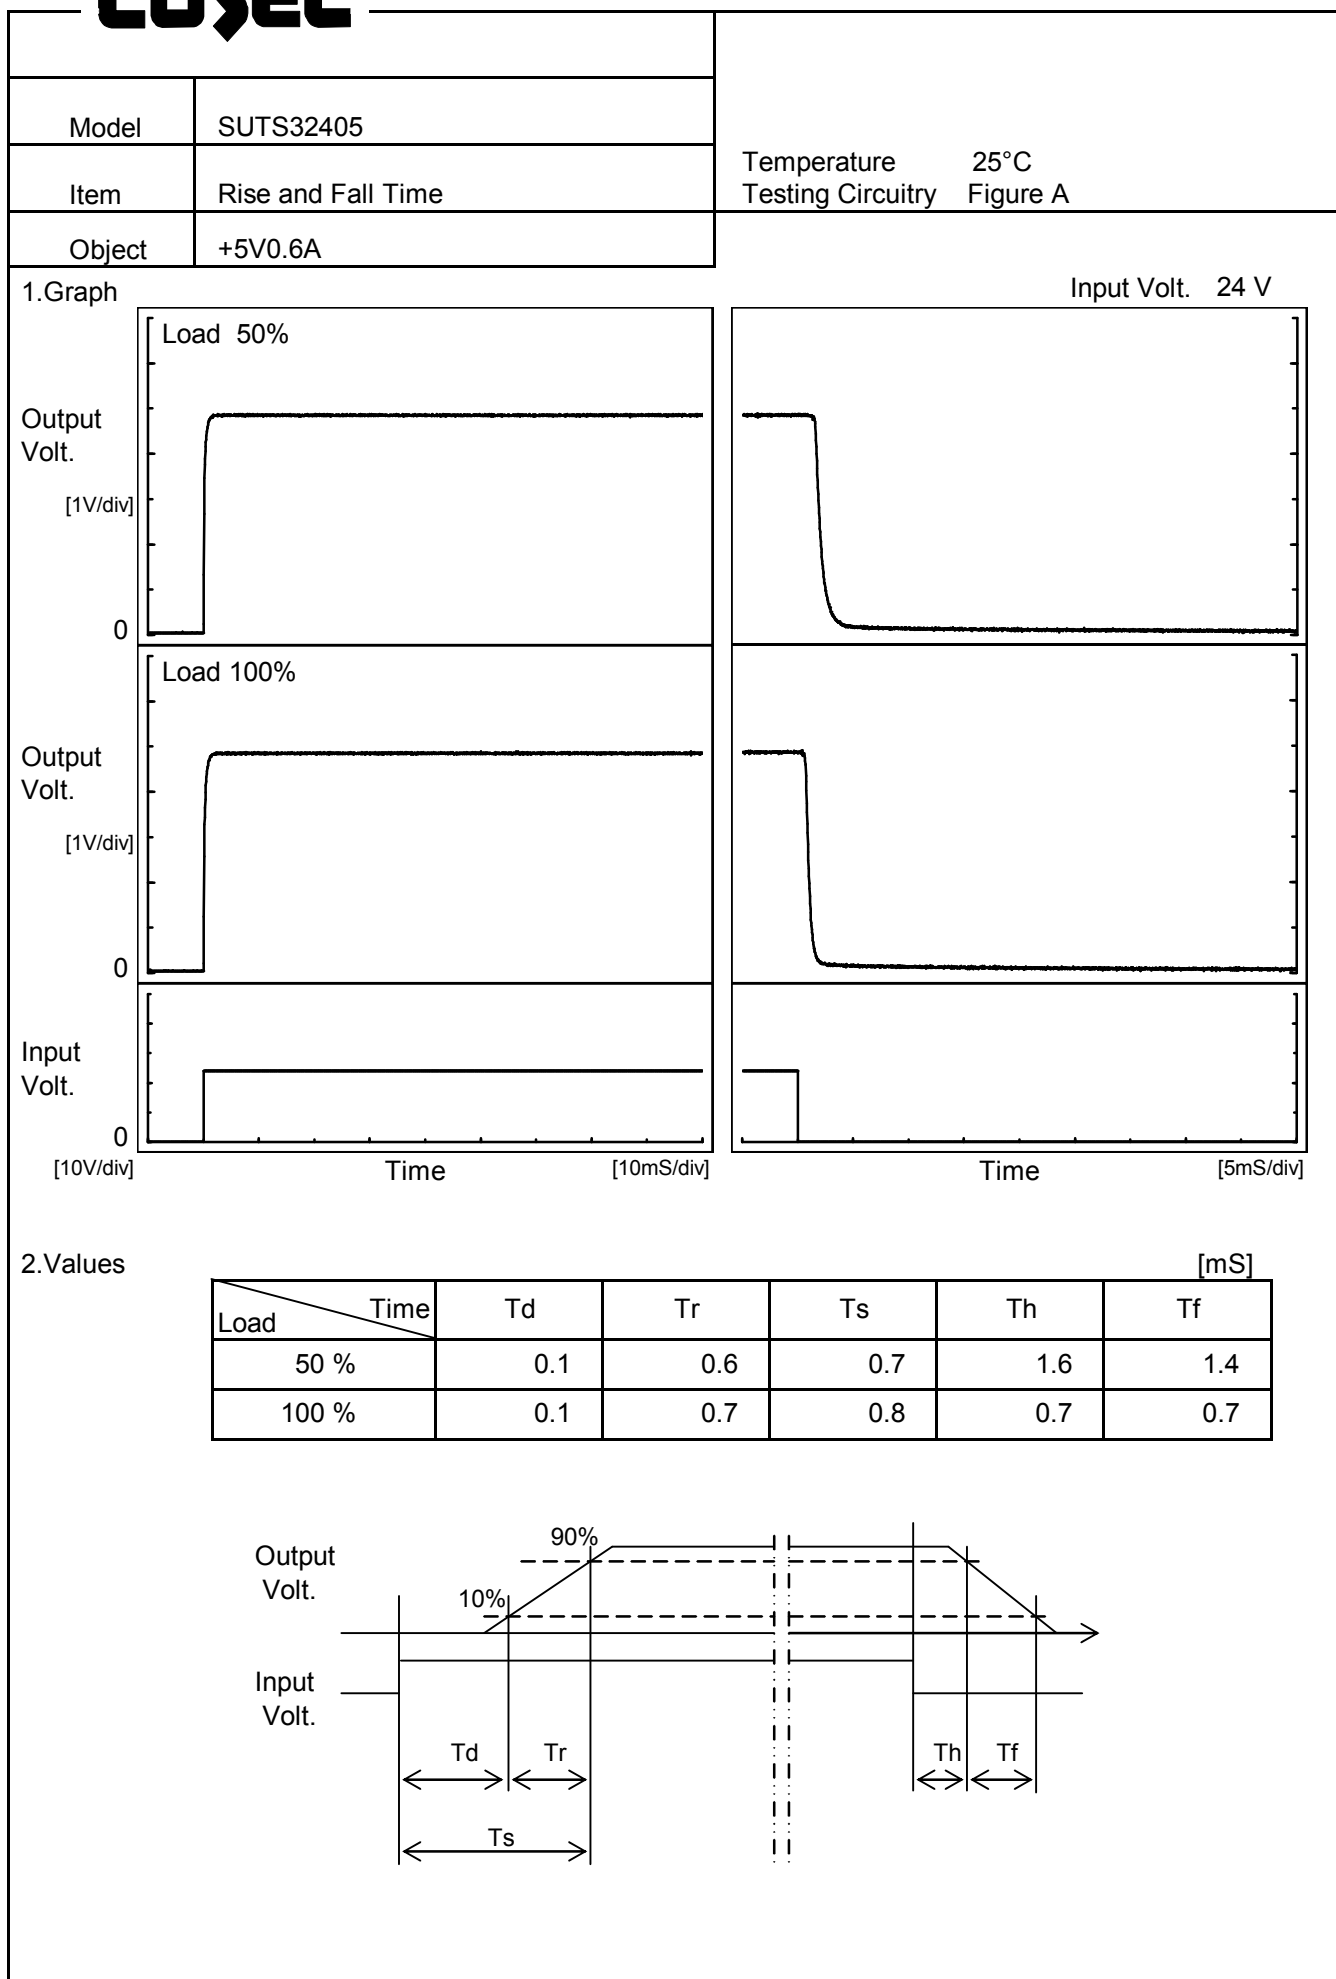

		Testing Circuitry Figure A																																						
Model	SUTS32405																																							
Item	Minimum Input Voltage for Regulated Output Voltage																																							
Object	+5V0.6A																																							
1.Graph		2.Values																																						
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								
		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Input Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>-60</td><td>7.5</td><td>9.6</td></tr><tr><td>-40</td><td>7.4</td><td>9.7</td></tr><tr><td>-20</td><td>7.3</td><td>9.9</td></tr><tr><td>0</td><td>7.2</td><td>10.0</td></tr><tr><td>25</td><td>7.1</td><td>10.3</td></tr><tr><td>55</td><td>7.2</td><td>10.6</td></tr><tr><td>60</td><td>7.3</td><td>10.7</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-60	7.5	9.6	-40	7.4	9.7	-20	7.3	9.9	0	7.2	10.0	25	7.1	10.3	55	7.2	10.6	60	7.3	10.7	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-60	7.5	9.6																																						
-40	7.4	9.7																																						
-20	7.3	9.9																																						
0	7.2	10.0																																						
25	7.1	10.3																																						
55	7.2	10.6																																						
60	7.3	10.7																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						

Model	SUTS32405																																																									
Item	Overcurrent Protection	Temperature	25°C																																																							
Object	+5V0.6A	Testing Circuitry	Figure A																																																							
1.Graph		2.Values																																																								
<div><div><div></div><div></div><div></div></div><div><div>Input Volt. 18V</div><div>Input Volt. 24V</div><div>Input Volt. 36V</div></div></div> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 18[V]</th><th>Input Volt. 24[V]</th><th>Input Volt. 36[V]</th></tr><tr><td>5.00</td><td>0.62</td><td>0.62</td><td>0.62</td></tr><tr><td>4.75</td><td>0.97</td><td>0.99</td><td>1.00</td></tr><tr><td>4.50</td><td>0.99</td><td>1.01</td><td>1.01</td></tr><tr><td>4.00</td><td>1.04</td><td>1.04</td><td>1.03</td></tr><tr><td>3.50</td><td>1.08</td><td>1.07</td><td>1.04</td></tr><tr><td>3.00</td><td>1.13</td><td>1.10</td><td>1.05</td></tr><tr><td>2.50</td><td>1.17</td><td>1.12</td><td>1.05</td></tr><tr><td>2.00</td><td>1.22</td><td>1.13</td><td>1.03</td></tr><tr><td>1.50</td><td>1.24</td><td>1.12</td><td>1.00</td></tr><tr><td>1.00</td><td>1.23</td><td>1.06</td><td>0.94</td></tr><tr><td>0.50</td><td>1.14</td><td>1.02</td><td>0.85</td></tr><tr><td>0.00</td><td>1.43</td><td>0.98</td><td>0.86</td></tr></table>		Output Voltage [V]	Load Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	5.00	0.62	0.62	0.62	4.75	0.97	0.99	1.00	4.50	0.99	1.01	1.01	4.00	1.04	1.04	1.03	3.50	1.08	1.07	1.04	3.00	1.13	1.10	1.05	2.50	1.17	1.12	1.05	2.00	1.22	1.13	1.03	1.50	1.24	1.12	1.00	1.00	1.23	1.06	0.94	0.50	1.14	1.02	0.85	0.00	1.43	0.98	0.86
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
5.00	0.62	0.62	0.62																																																							
4.75	0.97	0.99	1.00																																																							
4.50	0.99	1.01	1.01																																																							
4.00	1.04	1.04	1.03																																																							
3.50	1.08	1.07	1.04																																																							
3.00	1.13	1.10	1.05																																																							
2.50	1.17	1.12	1.05																																																							
2.00	1.22	1.13	1.03																																																							
1.50	1.24	1.12	1.00																																																							
1.00	1.23	1.06	0.94																																																							
0.50	1.14	1.02	0.85																																																							
0.00	1.43	0.98	0.86																																																							



Figure A

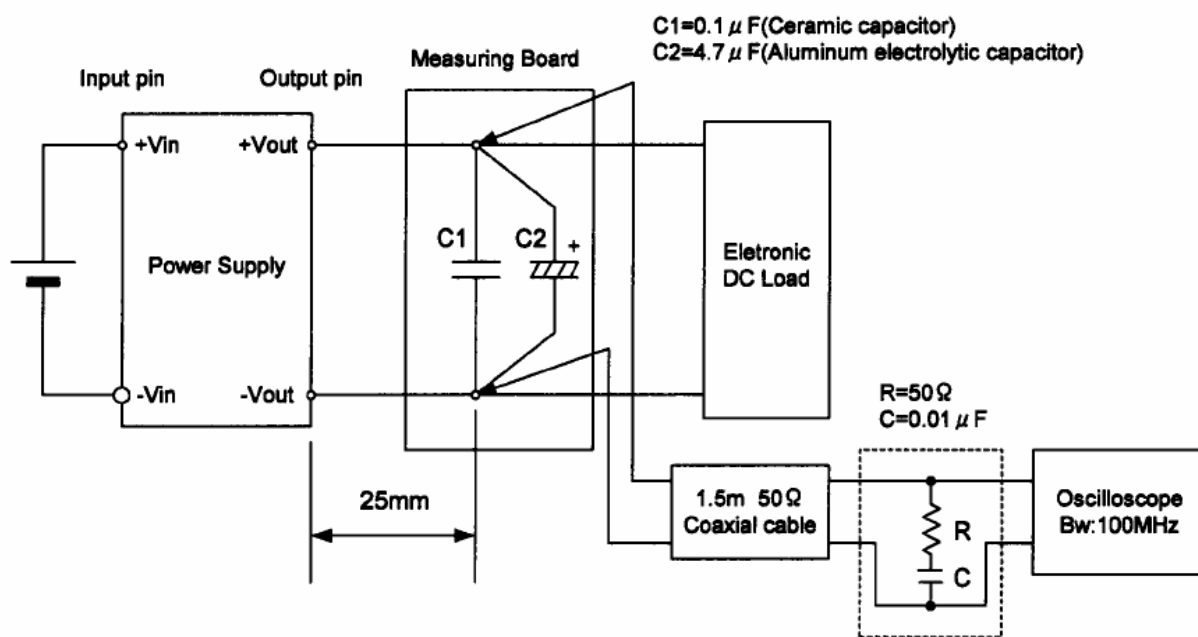


Figure B (Ripple and Ripple noise Characteristic)