

TEST DATA OF SUTS6053R3

Regulated DC Power Supply
March 5, 2009

Approved by : Kazunari Asano
Kazunari Asano Design Manager


Prepared by : Sho Saito
Sho Saito Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Input Voltage)	1
2.Input Current (by Load Current)	2
3.Input Power (by Load Current)	3
4.Efficiency (by Input Voltage)	4
5.Efficiency (by Load Current)	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple Voltage (by Load Current)	9
10.Ripple-Noise	10
11.Ripple Voltage (by Ambient Temperature)	11
12.Ambient Temperature Drift	12
13.Output Voltage Accuracy	13
14.Time Lapse Drift	14
15.Rise and Fall Time	15
16.Minimum Input Voltage for Regulated Output Voltage	16
17.Overcurrent Protection	17
18.Figure of Testing Circuitry	18

(Final Page 18)

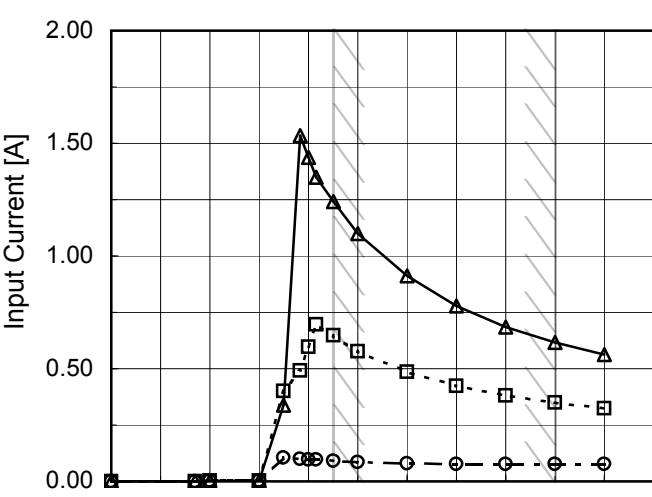Model	SUTS6053R3																																																																																	
Item	Input Current (by Input Voltage)	Temperature	25°C																																																																															
Object		Testing Circuitry	Figure A																																																																															
1.Graph		2.Values																																																																																
<div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div> <div></div> <div>Note: Slanted line shows the range of the rated input voltage.</div>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Load 0%</th><th>Load 50%</th><th>Load 100%</th></tr><tr><td>0.00</td><td>0.000</td><td>0.000</td><td>0.000</td></tr><tr><td>1.70</td><td>0.001</td><td>0.001</td><td>0.001</td></tr><tr><td>2.00</td><td>0.002</td><td>0.002</td><td>0.002</td></tr><tr><td>3.00</td><td>0.002</td><td>0.003</td><td>0.003</td></tr><tr><td>3.49</td><td>0.107</td><td>0.402</td><td>0.337</td></tr><tr><td>3.83</td><td>0.100</td><td>0.493</td><td>1.534</td></tr><tr><td>4.00</td><td>0.097</td><td>0.596</td><td>1.438</td></tr><tr><td>4.16</td><td>0.096</td><td>0.696</td><td>1.350</td></tr><tr><td>4.50</td><td>0.090</td><td>0.647</td><td>1.240</td></tr><tr><td>5.00</td><td>0.085</td><td>0.578</td><td>1.101</td></tr><tr><td>6.00</td><td>0.079</td><td>0.485</td><td>0.911</td></tr><tr><td>7.00</td><td>0.077</td><td>0.424</td><td>0.779</td></tr><tr><td>8.00</td><td>0.076</td><td>0.381</td><td>0.685</td></tr><tr><td>9.00</td><td>0.077</td><td>0.348</td><td>0.616</td></tr><tr><td>10.00</td><td>0.078</td><td>0.323</td><td>0.563</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.00	0.000	0.000	0.000	1.70	0.001	0.001	0.001	2.00	0.002	0.002	0.002	3.00	0.002	0.003	0.003	3.49	0.107	0.402	0.337	3.83	0.100	0.493	1.534	4.00	0.097	0.596	1.438	4.16	0.096	0.696	1.350	4.50	0.090	0.647	1.240	5.00	0.085	0.578	1.101	6.00	0.079	0.485	0.911	7.00	0.077	0.424	0.779	8.00	0.076	0.381	0.685	9.00	0.077	0.348	0.616	10.00	0.078	0.323	0.563	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																	
	Load 0%	Load 50%	Load 100%																																																																															
0.00	0.000	0.000	0.000																																																																															
1.70	0.001	0.001	0.001																																																																															
2.00	0.002	0.002	0.002																																																																															
3.00	0.002	0.003	0.003																																																																															
3.49	0.107	0.402	0.337																																																																															
3.83	0.100	0.493	1.534																																																																															
4.00	0.097	0.596	1.438																																																																															
4.16	0.096	0.696	1.350																																																																															
4.50	0.090	0.647	1.240																																																																															
5.00	0.085	0.578	1.101																																																																															
6.00	0.079	0.485	0.911																																																																															
7.00	0.077	0.424	0.779																																																																															
8.00	0.076	0.381	0.685																																																																															
9.00	0.077	0.348	0.616																																																																															
10.00	0.078	0.323	0.563																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															


Model	SUTS6053R3																																																					
Item	Input Current (by Load Current)	Temperature	25°C																																																			
Object		Testing Circuitry	Figure A																																																			
1.Graph		2.Values																																																				
<div><div>—△— Input Volt. 4.5V</div><div>---□--- Input Volt. 5V</div><div>-·-○-·- Input Volt. 9V</div></div> <p>Input Current [A]</p> <p>Load Current [A]</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 4.5[V]</th><th>Input Volt. 5[V]</th><th>Input Volt. 9[V]</th></tr><tr><td>0.00</td><td>0.089</td><td>0.084</td><td>0.076</td></tr><tr><td>0.24</td><td>0.305</td><td>0.277</td><td>0.188</td></tr><tr><td>0.48</td><td>0.530</td><td>0.477</td><td>0.295</td></tr><tr><td>0.72</td><td>0.770</td><td>0.686</td><td>0.403</td></tr><tr><td>0.96</td><td>0.988</td><td>0.891</td><td>0.513</td></tr><tr><td>1.20</td><td>1.283</td><td>1.130</td><td>0.625</td></tr><tr><td>1.32</td><td>1.342</td><td>1.223</td><td>0.682</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Current [A]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	0.089	0.084	0.076	0.24	0.305	0.277	0.188	0.48	0.530	0.477	0.295	0.72	0.770	0.686	0.403	0.96	0.988	0.891	0.513	1.20	1.283	1.130	0.625	1.32	1.342	1.223	0.682	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0.00	0.089	0.084	0.076																																																			
0.24	0.305	0.277	0.188																																																			
0.48	0.530	0.477	0.295																																																			
0.72	0.770	0.686	0.403																																																			
0.96	0.988	0.891	0.513																																																			
1.20	1.283	1.130	0.625																																																			
1.32	1.342	1.223	0.682																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

Model	SUTS6053R3																																																					
Item	Input Power (by Load Current)	Temperature	25°C																																																			
Object	_____	Testing Circuitry	Figure A																																																			
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>4.5V</div></div><div><div>---□---</div><div>Input Volt.</div><div>5V</div></div><div><div>---○---</div><div>Input Volt.</div><div>9V</div></div></div> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 4.5[V]</th><th>Input Volt. 5[V]</th><th>Input Volt. 9[V]</th></tr><tr><td>0.00</td><td>0.40</td><td>0.42</td><td>0.68</td></tr><tr><td>0.24</td><td>1.36</td><td>1.37</td><td>1.69</td></tr><tr><td>0.48</td><td>2.35</td><td>2.36</td><td>2.63</td></tr><tr><td>0.72</td><td>3.38</td><td>3.37</td><td>3.60</td></tr><tr><td>0.96</td><td>4.44</td><td>4.42</td><td>4.58</td></tr><tr><td>1.20</td><td>5.58</td><td>5.50</td><td>5.56</td></tr><tr><td>1.32</td><td>6.11</td><td>6.05</td><td>6.06</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Power [W]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	0.40	0.42	0.68	0.24	1.36	1.37	1.69	0.48	2.35	2.36	2.63	0.72	3.38	3.37	3.60	0.96	4.44	4.42	4.58	1.20	5.58	5.50	5.56	1.32	6.11	6.05	6.06	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0.00	0.40	0.42	0.68																																																			
0.24	1.36	1.37	1.69																																																			
0.48	2.35	2.36	2.63																																																			
0.72	3.38	3.37	3.60																																																			
0.96	4.44	4.42	4.58																																																			
1.20	5.58	5.50	5.56																																																			
1.32	6.11	6.05	6.06																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

Model	SUTS6053R3																																		
Item	Efficiency (by Input Voltage)	Temperature	25°C																																
		Testing Circuitry	Figure A																																
Object																																			
1.Graph		2.Values																																	
<div><div><div>---</div><div>□</div><div>---</div><div>Load 50%</div></div><div><div>—</div><div>△</div><div>—</div><div>Load 100%</div></div></div> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>4.0</td><td>68.9</td><td>69.7</td></tr><tr><td>4.5</td><td>69.4</td><td>71.1</td></tr><tr><td>5.0</td><td>69.4</td><td>71.7</td></tr><tr><td>6.0</td><td>68.6</td><td>72.6</td></tr><tr><td>7.0</td><td>67.1</td><td>72.6</td></tr><tr><td>8.0</td><td>65.4</td><td>72.1</td></tr><tr><td>9.0</td><td>63.5</td><td>71.1</td></tr><tr><td>9.5</td><td>62.6</td><td>70.6</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	4.0	68.9	69.7	4.5	69.4	71.1	5.0	69.4	71.7	6.0	68.6	72.6	7.0	67.1	72.6	8.0	65.4	72.1	9.0	63.5	71.1	9.5	62.6	70.6	--	-	-
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
4.0	68.9	69.7																																	
4.5	69.4	71.1																																	
5.0	69.4	71.7																																	
6.0	68.6	72.6																																	
7.0	67.1	72.6																																	
8.0	65.4	72.1																																	
9.0	63.5	71.1																																	
9.5	62.6	70.6																																	
--	-	-																																	

Model	SUTS6053R3																																																					
Item	Efficiency (by Load Current)	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph		2.Values																																																				
<div><div>—△— Input Volt. 4.5V</div><div>---□--- Input Volt. 5V</div><div>-·-○-·- Input Volt. 9V</div></div> <p>Efficiency [%]</p> <p>Load Current [A]</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 4.5[V]</th><th>Input Volt. 5[V]</th><th>Input Volt. 9[V]</th></tr><tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr><tr><td>0.24</td><td>58.4</td><td>57.6</td><td>47.0</td></tr><tr><td>0.48</td><td>67.3</td><td>67.0</td><td>60.1</td></tr><tr><td>0.72</td><td>70.2</td><td>70.5</td><td>65.9</td></tr><tr><td>0.96</td><td>71.2</td><td>71.6</td><td>69.1</td></tr><tr><td>1.20</td><td>70.8</td><td>71.8</td><td>71.1</td></tr><tr><td>1.32</td><td>71.2</td><td>71.8</td><td>71.7</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Efficiency [%]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	-	-	-	0.24	58.4	57.6	47.0	0.48	67.3	67.0	60.1	0.72	70.2	70.5	65.9	0.96	71.2	71.6	69.1	1.20	70.8	71.8	71.1	1.32	71.2	71.8	71.7	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0.00	-	-	-																																																			
0.24	58.4	57.6	47.0																																																			
0.48	67.3	67.0	60.1																																																			
0.72	70.2	70.5	65.9																																																			
0.96	71.2	71.6	69.1																																																			
1.20	70.8	71.8	71.1																																																			
1.32	71.2	71.8	71.7																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

Model	SUTS6053R3																																																																
Item	Line Regulation	Temperature	25°C																																																														
Object	+3.3V1.2A	Testing Circuitry	Figure A																																																														
1.Graph		2.Values																																																															
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <table><thead><tr><th>Input Voltage [V]</th><th>Output Voltage [V] (Load 50%)</th><th>Output Voltage [V] (Load 100%)</th></tr></thead><tbody><tr><td>4.0</td><td>3.296</td><td>3.291</td></tr><tr><td>4.5</td><td>3.296</td><td>3.291</td></tr><tr><td>5.0</td><td>3.297</td><td>3.291</td></tr><tr><td>6.0</td><td>3.296</td><td>3.291</td></tr><tr><td>7.0</td><td>3.296</td><td>3.291</td></tr><tr><td>8.0</td><td>3.296</td><td>3.291</td></tr><tr><td>9.0</td><td>3.296</td><td>3.291</td></tr><tr><td>9.5</td><td>3.296</td><td>3.291</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table>		Input Voltage [V]	Output Voltage [V] (Load 50%)	Output Voltage [V] (Load 100%)	4.0	3.296	3.291	4.5	3.296	3.291	5.0	3.297	3.291	6.0	3.296	3.291	7.0	3.296	3.291	8.0	3.296	3.291	9.0	3.296	3.291	9.5	3.296	3.291	--	-	-	<table><thead><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>4.0</td><td>3.296</td><td>3.291</td></tr><tr><td>4.5</td><td>3.296</td><td>3.291</td></tr><tr><td>5.0</td><td>3.297</td><td>3.291</td></tr><tr><td>6.0</td><td>3.296</td><td>3.291</td></tr><tr><td>7.0</td><td>3.296</td><td>3.291</td></tr><tr><td>8.0</td><td>3.296</td><td>3.291</td></tr><tr><td>9.0</td><td>3.296</td><td>3.291</td></tr><tr><td>9.5</td><td>3.296</td><td>3.291</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	4.0	3.296	3.291	4.5	3.296	3.291	5.0	3.297	3.291	6.0	3.296	3.291	7.0	3.296	3.291	8.0	3.296	3.291	9.0	3.296	3.291	9.5	3.296	3.291	--	-	-
Input Voltage [V]	Output Voltage [V] (Load 50%)	Output Voltage [V] (Load 100%)																																																															
4.0	3.296	3.291																																																															
4.5	3.296	3.291																																																															
5.0	3.297	3.291																																																															
6.0	3.296	3.291																																																															
7.0	3.296	3.291																																																															
8.0	3.296	3.291																																																															
9.0	3.296	3.291																																																															
9.5	3.296	3.291																																																															
--	-	-																																																															
Input Voltage [V]	Output Voltage [V]																																																																
	Load 50%	Load 100%																																																															
4.0	3.296	3.291																																																															
4.5	3.296	3.291																																																															
5.0	3.297	3.291																																																															
6.0	3.296	3.291																																																															
7.0	3.296	3.291																																																															
8.0	3.296	3.291																																																															
9.0	3.296	3.291																																																															
9.5	3.296	3.291																																																															
--	-	-																																																															
Note: Slanted line shows the range of the rated input voltage.																																																																	

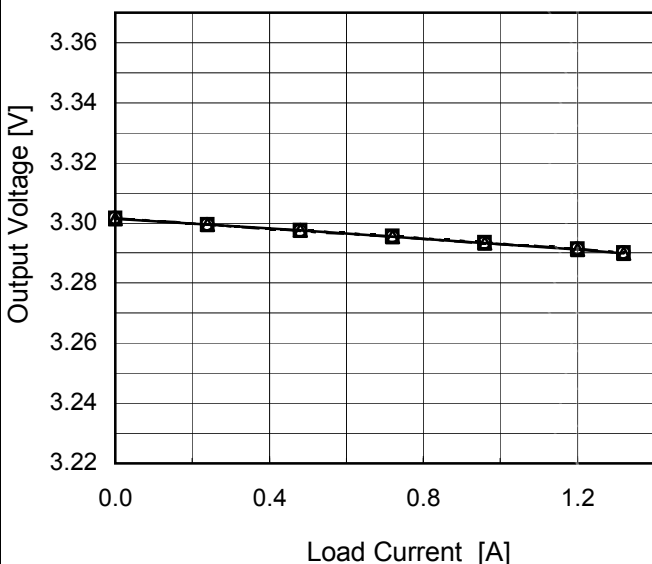Model	SUTS6053R3																																																					
Item	Load Regulation	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	+3.3V1.2A																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>4.5V</div></div><div><div>---□---</div><div>Input Volt.</div><div>5V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>9V</div></div></div>  <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 4.5[V]</th><th>Input Volt. 5[V]</th><th>Input Volt. 9[V]</th></tr><tr><td>0.00</td><td>3.301</td><td>3.302</td><td>3.302</td></tr><tr><td>0.24</td><td>3.299</td><td>3.300</td><td>3.299</td></tr><tr><td>0.48</td><td>3.298</td><td>3.298</td><td>3.297</td></tr><tr><td>0.72</td><td>3.295</td><td>3.296</td><td>3.295</td></tr><tr><td>0.96</td><td>3.293</td><td>3.294</td><td>3.293</td></tr><tr><td>1.20</td><td>3.291</td><td>3.291</td><td>3.291</td></tr><tr><td>1.32</td><td>3.290</td><td>3.290</td><td>3.290</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Output Voltage [V]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	3.301	3.302	3.302	0.24	3.299	3.300	3.299	0.48	3.298	3.298	3.297	0.72	3.295	3.296	3.295	0.96	3.293	3.294	3.293	1.20	3.291	3.291	3.291	1.32	3.290	3.290	3.290	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0.00	3.301	3.302	3.302																																																			
0.24	3.299	3.300	3.299																																																			
0.48	3.298	3.298	3.297																																																			
0.72	3.295	3.296	3.295																																																			
0.96	3.293	3.294	3.293																																																			
1.20	3.291	3.291	3.291																																																			
1.32	3.290	3.290	3.290																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			




Model		SUTS6053R3	Temperature 25°C Testing Circuitry Figure A
Item		Dynamic Load Response	
Object		+3.3V1.2A	

Input Volt. 5 V
Cycle 100 mS




Min. Load (0A) \longleftrightarrow
Load 100% (1.2A)

100mV/div

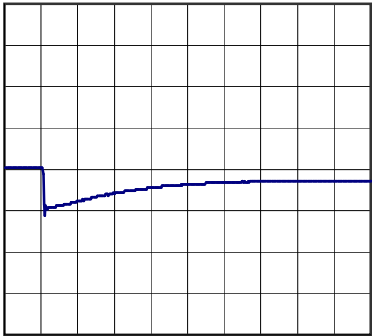


500µs/div

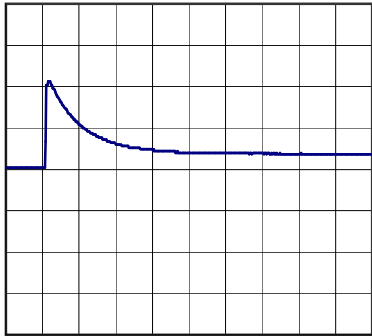


500µs/div

Min. Load (0A) \longleftrightarrow
Load 50% (0.6A)

100mV/div

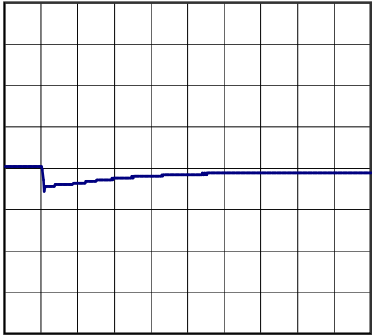


500µs/div

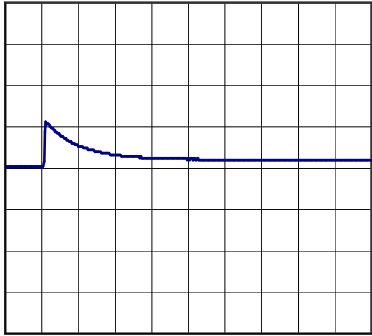


500µs/div

Load 50% (0.6A) \longleftrightarrow
Load 100% (1.2A)

100mV/div


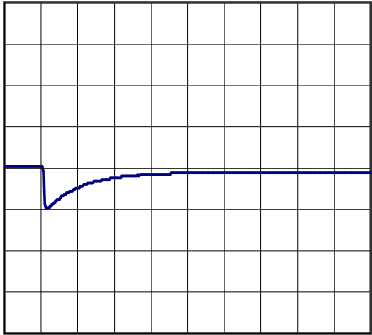


500µs/div

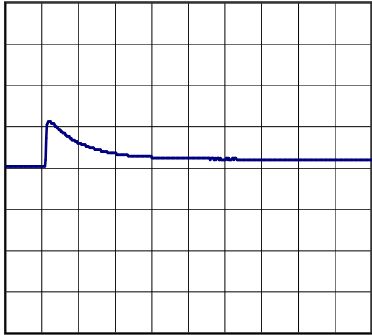

500µs/div


Model	SUTS6053R3																																								
Item	Ripple Voltage (by Load Current)	Temperature	25°C																																						
		Testing Circuitry	Figure B																																						
Object	+3.3V1.2A																																								
1.Graph		2.Values																																							
<div><div><div>—△—</div><div>Input Volt.</div><div>4.5V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>9V</div></div></div> <table><thead><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple Voltage [mV]</th></tr><tr><th>Input Volt. 4.5 [V]</th><th>Input Volt. 9 [V]</th></tr></thead><tbody><tr><td>0.00</td><td>2</td><td>2</td></tr><tr><td>0.24</td><td>3</td><td>3</td></tr><tr><td>0.48</td><td>4</td><td>4</td></tr><tr><td>0.72</td><td>5</td><td>5</td></tr><tr><td>0.96</td><td>6</td><td>6</td></tr><tr><td>1.20</td><td>8</td><td>7</td></tr><tr><td>1.32</td><td>9</td><td>8</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table>		Load Current [A]	Ripple Voltage [mV]		Input Volt. 4.5 [V]	Input Volt. 9 [V]	0.00	2	2	0.24	3	3	0.48	4	4	0.72	5	5	0.96	6	6	1.20	8	7	1.32	9	8	--	-	-	--	-	-	--	-	-	--	-	-		
Load Current [A]	Ripple Voltage [mV]																																								
	Input Volt. 4.5 [V]	Input Volt. 9 [V]																																							
0.00	2	2																																							
0.24	3	3																																							
0.48	4	4																																							
0.72	5	5																																							
0.96	6	6																																							
1.20	8	7																																							
1.32	9	8																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.																																									
<div>Ripple [mVp-p]</div> <div>Fig.Complex Ripple Wave Form</div>																																									

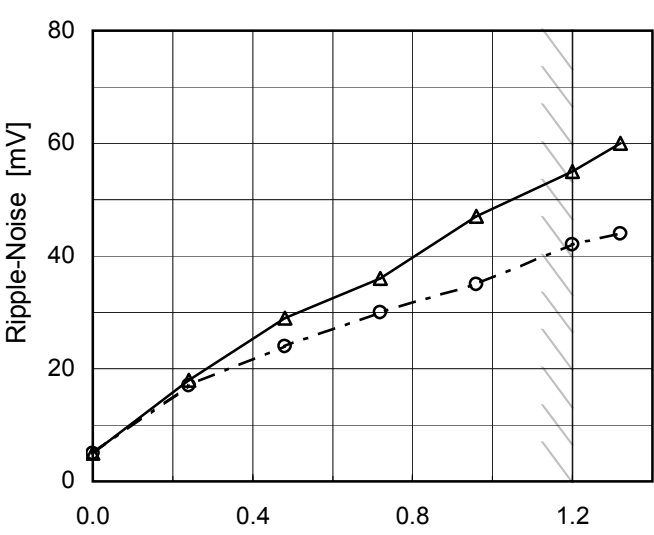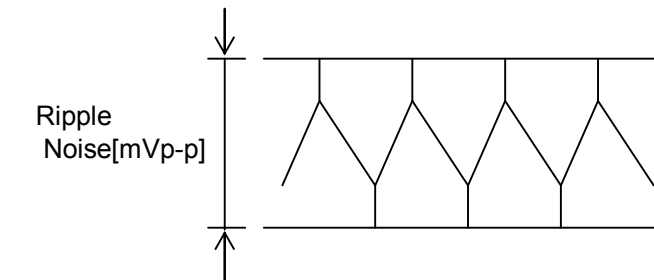Model	SUTS6053R3																																								
Item	Ripple-Noise	Temperature	25°C																																						
Object	+3.3V1.2A	Testing Circuitry	Figure B																																						
1.Graph		2.Values																																							
<div><div><div>—△— Input Volt. 4.5V</div><div>-·-○-·- Input Volt. 9V</div></div><p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple-Noise [mV]</th></tr><tr><th>Input Volt. 4.5 [V]</th><th>Input Volt. 9 [V]</th></tr><tr><td>0.00</td><td>5</td><td>5</td></tr><tr><td>0.24</td><td>18</td><td>17</td></tr><tr><td>0.48</td><td>29</td><td>24</td></tr><tr><td>0.72</td><td>36</td><td>30</td></tr><tr><td>0.96</td><td>47</td><td>35</td></tr><tr><td>1.20</td><td>55</td><td>42</td></tr><tr><td>1.32</td><td>60</td><td>44</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple-Noise [mV]		Input Volt. 4.5 [V]	Input Volt. 9 [V]	0.00	5	5	0.24	18	17	0.48	29	24	0.72	36	30	0.96	47	35	1.20	55	42	1.32	60	44	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 4.5 [V]	Input Volt. 9 [V]																																							
0.00	5	5																																							
0.24	18	17																																							
0.48	29	24																																							
0.72	36	30																																							
0.96	47	35																																							
1.20	55	42																																							
1.32	60	44																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<div><div><div></div><div></div></div><p>Fig.Complex Ripple Noise Wave Form</p></div>																																									

Model	SUTS6053R3																																								
Item	Ripple Voltage (by Ambient Temp.)	Testing Circuitry Figure B																																							
Object	+3.3V1.2A																																								
1.Graph		2.Values																																							
<div><div>---□--- Load 50%</div><div>—△— Load 100%</div></div> <p>Measured by 100 MHz Oscilloscope. Note: Slanted line shows the range of the rated ambient temperature.</p>		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Ripple Voltage [mV]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>-60</td><td>10</td><td>15</td></tr><tr><td>-40</td><td>10</td><td>13</td></tr><tr><td>-20</td><td>8</td><td>10</td></tr><tr><td>0</td><td>6</td><td>9</td></tr><tr><td>25</td><td>6</td><td>8</td></tr><tr><td>55</td><td>5</td><td>7</td></tr><tr><td>60</td><td>5</td><td>7</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-60	10	15	-40	10	13	-20	8	10	0	6	9	25	6	8	55	5	7	60	5	7	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																								
	Load 50%	Load 100%																																							
-60	10	15																																							
-40	10	13																																							
-20	8	10																																							
0	6	9																																							
25	6	8																																							
55	5	7																																							
60	5	7																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							

Model	SUTS6053R3																																																					
Item	Ambient Temperature Drift	Testing Circuitry Figure A																																																				
Object	+3.3V1.2A																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>4.5V</div></div><div><div>---□---</div><div>Input Volt.</div><div>5V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>9V</div></div></div> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 4.5[V]</th><th>Input Volt. 5[V]</th><th>Input Volt. 9[V]</th></tr><tr><td>-60</td><td>3.277</td><td>3.280</td><td>3.281</td></tr><tr><td>-40</td><td>3.284</td><td>3.286</td><td>3.287</td></tr><tr><td>-20</td><td>3.289</td><td>3.290</td><td>3.290</td></tr><tr><td>0</td><td>3.292</td><td>3.293</td><td>3.293</td></tr><tr><td>25</td><td>3.293</td><td>3.293</td><td>3.293</td></tr><tr><td>55</td><td>3.290</td><td>3.290</td><td>3.289</td></tr><tr><td>60</td><td>3.289</td><td>3.289</td><td>3.289</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	-60	3.277	3.280	3.281	-40	3.284	3.286	3.287	-20	3.289	3.290	3.290	0	3.292	3.293	3.293	25	3.293	3.293	3.293	55	3.290	3.290	3.289	60	3.289	3.289	3.289	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
-60	3.277	3.280	3.281																																																			
-40	3.284	3.286	3.287																																																			
-20	3.289	3.290	3.290																																																			
0	3.292	3.293	3.293																																																			
25	3.293	3.293	3.293																																																			
55	3.290	3.290	3.289																																																			
60	3.289	3.289	3.289																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			



			
Model	SUTS6053R3		
Item	Output Voltage Accuracy		Testing Circuitry Figure A
Object	+3.3V1.2A		

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 4.5 - 9V

Load Current : 0 - 1.2A


* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$


* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	25	4.5	0	3.303	±10	±0.3
Minimum Voltage	-40	4.5	1.2	3.284		

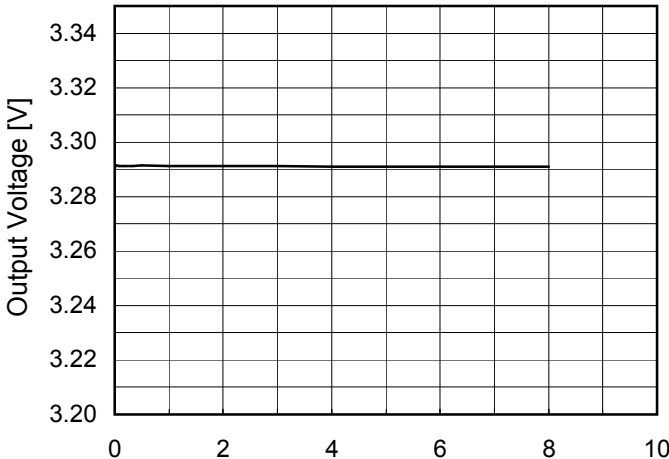

Model	SUTS6053R3																								
Item	Time Lapse Drift	Temperature	25°C																						
		Testing Circuitry	Figure A																						
Object	+3.3V1.2A																								
1.Graph		2.Values																							
<div><p>Output Voltage [V]</p><p>Time [H]</p><p>Input Volt. 5V</p><p>Load 100%</p></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>3.290</td></tr><tr><td>0.5</td><td>3.291</td></tr><tr><td>1.0</td><td>3.291</td></tr><tr><td>2.0</td><td>3.291</td></tr><tr><td>3.0</td><td>3.291</td></tr><tr><td>4.0</td><td>3.291</td></tr><tr><td>5.0</td><td>3.291</td></tr><tr><td>6.0</td><td>3.291</td></tr><tr><td>7.0</td><td>3.291</td></tr><tr><td>8.0</td><td>3.291</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	3.290	0.5	3.291	1.0	3.291	2.0	3.291	3.0	3.291	4.0	3.291	5.0	3.291	6.0	3.291	7.0	3.291	8.0	3.291
Time since start [H]	Output Voltage [V]																								
0.0	3.290																								
0.5	3.291																								
1.0	3.291																								
2.0	3.291																								
3.0	3.291																								
4.0	3.291																								
5.0	3.291																								
6.0	3.291																								
7.0	3.291																								
8.0	3.291																								

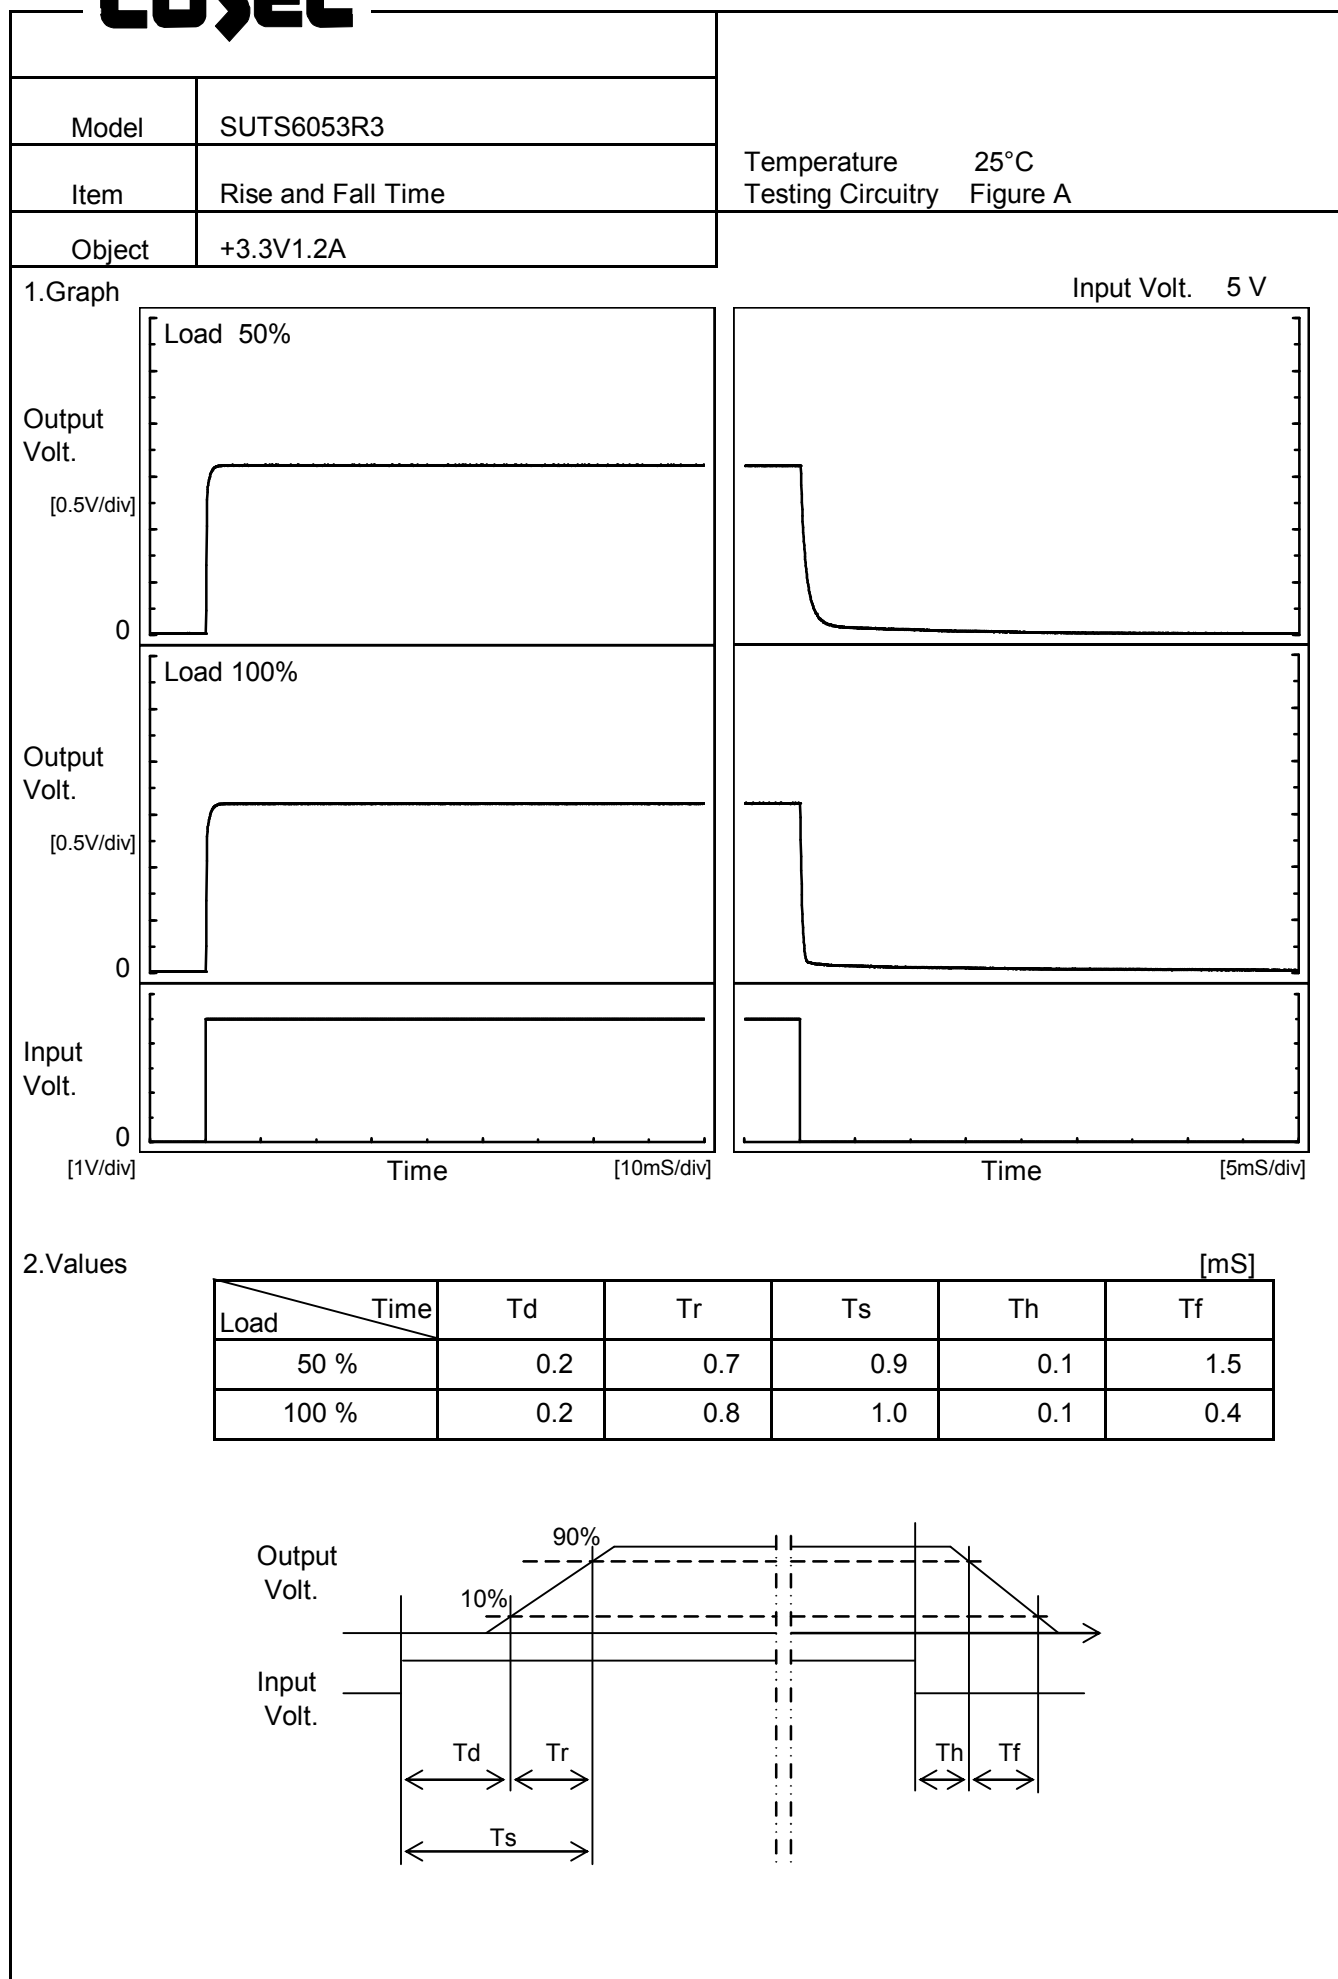

Model

SUTS6053R3

Item


Minimum Input Voltage
for Regulated Output Voltage

Object

+3.3V1.2A

Testing Circuitry Figure A

1. Graph

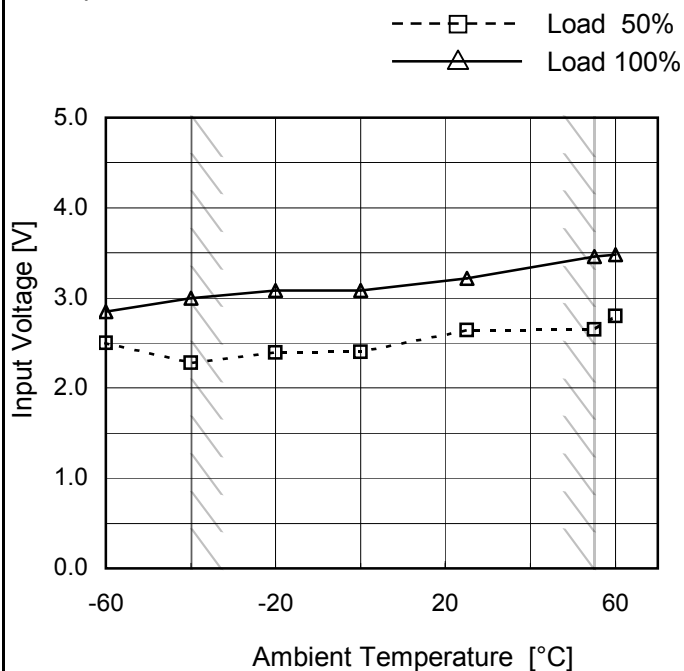

Note: Slanted line shows the range of the rated ambient temperature.

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	2.5	2.9
-40	2.3	3.0
-20	2.4	3.1
0	2.4	3.1
25	2.7	3.3
55	2.7	3.5
60	2.8	3.5
--	-	-
--	-	-
--	-	-
--	-	-

Model	SUTS6053R3																																																									
Item	Overcurrent Protection	Temperature	25°C																																																							
Object	+3.3V1.2A	Testing Circuitry	Figure A																																																							
1.Graph		2.Values																																																								
<div><div><div></div><div></div><div></div></div><div><div>Input Volt.</div><div>Input Volt.</div><div>Input Volt.</div></div><div><div>4.5V</div><div>5V</div><div>9V</div></div></div> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 4.5[V]</th><th>Input Volt. 5[V]</th><th>Input Volt. 9[V]</th></tr><tr><td>3.30</td><td>1.20</td><td>1.20</td><td>1.20</td></tr><tr><td>3.14</td><td>1.59</td><td>1.66</td><td>1.68</td></tr><tr><td>2.97</td><td>1.61</td><td>1.68</td><td>1.69</td></tr><tr><td>2.64</td><td>1.65</td><td>1.72</td><td>1.70</td></tr><tr><td>2.31</td><td>1.70</td><td>1.77</td><td>1.71</td></tr><tr><td>1.98</td><td>1.76</td><td>1.84</td><td>1.75</td></tr><tr><td>1.65</td><td>1.84</td><td>1.91</td><td>1.79</td></tr><tr><td>1.32</td><td>1.89</td><td>1.95</td><td>1.81</td></tr><tr><td>0.99</td><td>1.92</td><td>1.96</td><td>1.82</td></tr><tr><td>0.66</td><td>1.89</td><td>1.93</td><td>1.80</td></tr><tr><td>0.33</td><td>1.81</td><td>1.82</td><td>1.73</td></tr><tr><td>0.00</td><td>1.49</td><td>1.52</td><td>1.50</td></tr></table>		Output Voltage [V]	Load Current [A]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	3.30	1.20	1.20	1.20	3.14	1.59	1.66	1.68	2.97	1.61	1.68	1.69	2.64	1.65	1.72	1.70	2.31	1.70	1.77	1.71	1.98	1.76	1.84	1.75	1.65	1.84	1.91	1.79	1.32	1.89	1.95	1.81	0.99	1.92	1.96	1.82	0.66	1.89	1.93	1.80	0.33	1.81	1.82	1.73	0.00	1.49	1.52	1.50
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																							
3.30	1.20	1.20	1.20																																																							
3.14	1.59	1.66	1.68																																																							
2.97	1.61	1.68	1.69																																																							
2.64	1.65	1.72	1.70																																																							
2.31	1.70	1.77	1.71																																																							
1.98	1.76	1.84	1.75																																																							
1.65	1.84	1.91	1.79																																																							
1.32	1.89	1.95	1.81																																																							
0.99	1.92	1.96	1.82																																																							
0.66	1.89	1.93	1.80																																																							
0.33	1.81	1.82	1.73																																																							
0.00	1.49	1.52	1.50																																																							



Figure A

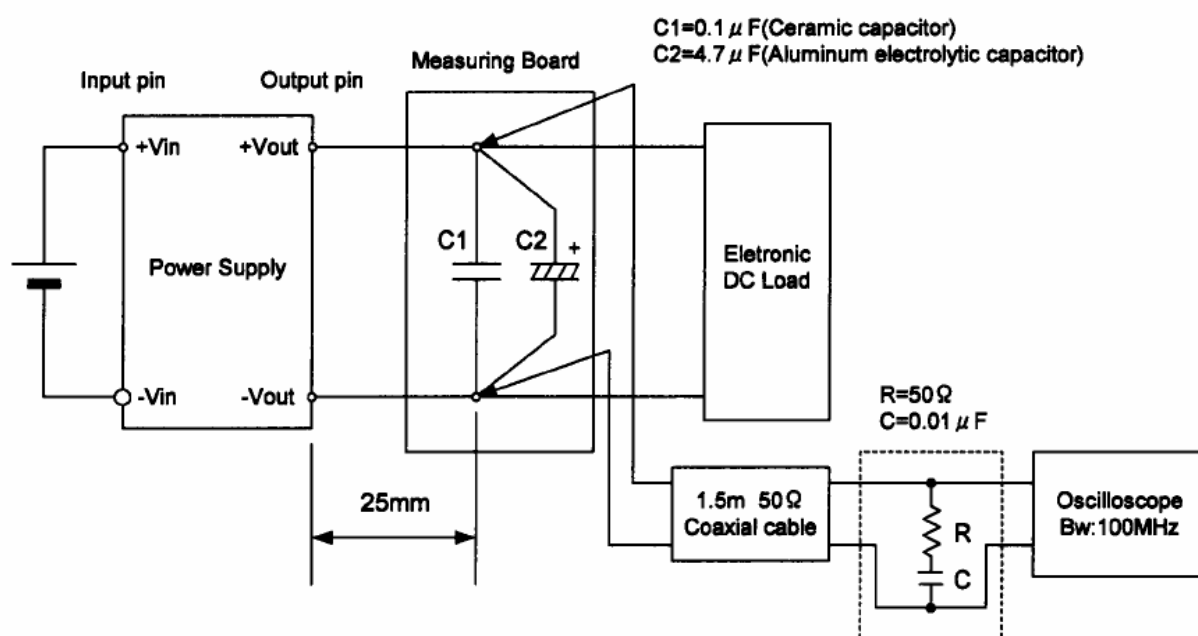


Figure B (Ripple and Ripple noise Characteristic)