

# TEST DATA OF TUHS10F05

Regulated DC Power Supply  
February 28, 2014

Approved by : Nobuyuki Shiraishi  
Nobuyuki Shiraishi Design Manager

Prepared by : Sakae Minamide  
Sakae Minamide Design Engineer

**COSEL CO.,LTD.**

## CONTENTS

1.Input Current (by Load Current) . . . . .	1
2.Input Power (by Load Current) . . . . .	2
3.Efficiency (by Input Voltage) . . . . .	3
4.Efficiency (by Load Current) . . . . .	4
5.Power Factor (by Input Voltage) . . . . .	5
6.Power Factor (by Load Current) . . . . .	6
7.Inrush Current . . . . .	7
8.Leakage Current . . . . .	8
9.Line Regulation . . . . .	9
10.Load Regulation . . . . .	10
11.Dynamic Load Response . . . . .	11
12.Ripple Voltage (by Load Current) . . . . .	12
13.Ripple-Noise . . . . .	13
14.Ripple Voltage (by Ambient Temperature) . . . . .	14
15.Ambient Temperature Drift . . . . .	15
16.Output Voltage Accuracy . . . . .	16
17.Time Lapse Drift . . . . .	17
18.Rise and Fall Time . . . . .	18
19.Hold-Up Time . . . . .	19
20.Instantaneous Interruption Compensation . . . . .	20
21.Minimum Input Voltage for Regulated Output Voltage . . . . .	21
22.Overcurrent Protection . . . . .	22
23.Overvoltage Protection . . . . .	23
24.Figure of Testing Circuitry . . . . .	24

(Final Page 25)

Model	TUHS10F05																																																					
Item	Input Current (by Load Current)	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph		2.Values																																																				
<div><div>—△—</div><div>Input Volt.</div><div>100V</div></div> <div><div>---□---</div><div>Input Volt.</div><div>200V</div></div> <div><div>---○---</div><div>Input Volt.</div><div>230V</div></div> <p>Input Current [A]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>0.002</td><td>0.001</td><td>0.001</td></tr><tr><td>0.40</td><td>0.057</td><td>0.037</td><td>0.034</td></tr><tr><td>0.80</td><td>0.099</td><td>0.063</td><td>0.058</td></tr><tr><td>1.20</td><td>0.139</td><td>0.087</td><td>0.079</td></tr><tr><td>1.60</td><td>0.178</td><td>0.110</td><td>0.100</td></tr><tr><td>2.00</td><td>0.217</td><td>0.132</td><td>0.120</td></tr><tr><td>2.20</td><td>0.237</td><td>0.143</td><td>0.131</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Current [A]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.002	0.001	0.001	0.40	0.057	0.037	0.034	0.80	0.099	0.063	0.058	1.20	0.139	0.087	0.079	1.60	0.178	0.110	0.100	2.00	0.217	0.132	0.120	2.20	0.237	0.143	0.131	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	0.002	0.001	0.001																																																			
0.40	0.057	0.037	0.034																																																			
0.80	0.099	0.063	0.058																																																			
1.20	0.139	0.087	0.079																																																			
1.60	0.178	0.110	0.100																																																			
2.00	0.217	0.132	0.120																																																			
2.20	0.237	0.143	0.131																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

Model	TUHS10F05																																																					
Item	Input Power (by Load Current)	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>100V</div></div><div><div>---□---</div><div>Input Volt.</div><div>200V</div></div><div><div>---○---</div><div>Input Volt.</div><div>230V</div></div></div> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>0.06</td><td>0.07</td><td>0.08</td></tr><tr><td>0.40</td><td>2.62</td><td>2.74</td><td>2.78</td></tr><tr><td>0.80</td><td>5.00</td><td>5.12</td><td>5.16</td></tr><tr><td>1.20</td><td>7.43</td><td>7.48</td><td>7.52</td></tr><tr><td>1.60</td><td>9.91</td><td>9.88</td><td>9.92</td></tr><tr><td>2.00</td><td>12.42</td><td>12.32</td><td>12.35</td></tr><tr><td>2.20</td><td>13.70</td><td>13.55</td><td>13.58</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Power [W]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.06	0.07	0.08	0.40	2.62	2.74	2.78	0.80	5.00	5.12	5.16	1.20	7.43	7.48	7.52	1.60	9.91	9.88	9.92	2.00	12.42	12.32	12.35	2.20	13.70	13.55	13.58	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	0.06	0.07	0.08																																																			
0.40	2.62	2.74	2.78																																																			
0.80	5.00	5.12	5.16																																																			
1.20	7.43	7.48	7.52																																																			
1.60	9.91	9.88	9.92																																																			
2.00	12.42	12.32	12.35																																																			
2.20	13.70	13.55	13.58																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

Model		TUHS10F05		Temperature 25°C																																	
Item		Efficiency (by Input Voltage)		Testing Circuitry Figure A																																	
Object																																					
1.Graph				2.Values																																	
<div><div><div><div><div></div><div></div></div><div></div><div></div></div><div><div></div><div></div></div><div><div></div><div></div></div></div><div>Load 50%</div><div>Load 100%</div></div> <table><thead><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>75</td><td>80.6</td><td>79.6</td></tr><tr><td>85</td><td>80.9</td><td>80.4</td></tr><tr><td>100</td><td>81.2</td><td>81.1</td></tr><tr><td>120</td><td>81.2</td><td>81.6</td></tr><tr><td>200</td><td>80.0</td><td>81.6</td></tr><tr><td>230</td><td>79.5</td><td>81.4</td></tr><tr><td>264</td><td>78.3</td><td>81.0</td></tr><tr><td>280</td><td>77.4</td><td>80.5</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table> <p>Note: Slanted line shows the range of the rated input voltage.</p>				Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	75	80.6	79.6	85	80.9	80.4	100	81.2	81.1	120	81.2	81.6	200	80.0	81.6	230	79.5	81.4	264	78.3	81.0	280	77.4	80.5	--	-	-		
Input Voltage [V]	Efficiency [%]																																				
	Load 50%	Load 100%																																			
75	80.6	79.6																																			
85	80.9	80.4																																			
100	81.2	81.1																																			
120	81.2	81.6																																			
200	80.0	81.6																																			
230	79.5	81.4																																			
264	78.3	81.0																																			
280	77.4	80.5																																			
--	-	-																																			

Model	TUHS10F05																																																					
Item	Efficiency (by Load Current)	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>100V</div></div><div><div>---□---</div><div>Input Volt.</div><div>200V</div></div><div><div>---○---</div><div>Input Volt.</div><div>230V</div></div></div> <p>Efficiency [%]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr><tr><td>0.4</td><td>76.7</td><td>73.5</td><td>72.4</td></tr><tr><td>0.8</td><td>80.6</td><td>78.7</td><td>77.9</td></tr><tr><td>1.2</td><td>81.4</td><td>80.8</td><td>80.3</td></tr><tr><td>1.6</td><td>81.4</td><td>81.6</td><td>81.2</td></tr><tr><td>2.0</td><td>81.1</td><td>81.6</td><td>81.4</td></tr><tr><td>2.2</td><td>80.7</td><td>81.6</td><td>81.4</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Efficiency [%]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.0	-	-	-	0.4	76.7	73.5	72.4	0.8	80.6	78.7	77.9	1.2	81.4	80.8	80.3	1.6	81.4	81.6	81.2	2.0	81.1	81.6	81.4	2.2	80.7	81.6	81.4	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.0	-	-	-																																																			
0.4	76.7	73.5	72.4																																																			
0.8	80.6	78.7	77.9																																																			
1.2	81.4	80.8	80.3																																																			
1.6	81.4	81.6	81.2																																																			
2.0	81.1	81.6	81.4																																																			
2.2	80.7	81.6	81.4																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			




Model	TUHS10F05																																
Item	Power Factor (by Input Voltage)	Temperature	25°C																														
		Testing Circuitry	Figure A																														
Object																																	
1.Graph		2.Values																															
<div><div><div>---</div><div>□</div><div>---</div></div><div>Load 50%</div></div> <div><div>—</div><div>△</div><div>—</div></div> <div>Load 100%</div> <table><thead><tr><th>Input Voltage [V]</th><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>75</td><td>0.557</td><td>0.614</td></tr><tr><td>85</td><td>0.537</td><td>0.593</td></tr><tr><td>100</td><td>0.511</td><td>0.565</td></tr><tr><td>120</td><td>0.484</td><td>0.536</td></tr><tr><td>200</td><td>0.412</td><td>0.456</td></tr><tr><td>230</td><td>0.395</td><td>0.438</td></tr><tr><td>264</td><td>0.379</td><td>0.419</td></tr><tr><td>280</td><td>0.372</td><td>0.411</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table>		Input Voltage [V]	Load 50%	Load 100%	75	0.557	0.614	85	0.537	0.593	100	0.511	0.565	120	0.484	0.536	200	0.412	0.456	230	0.395	0.438	264	0.379	0.419	280	0.372	0.411	--	-	-		
Input Voltage [V]	Load 50%	Load 100%																															
75	0.557	0.614																															
85	0.537	0.593																															
100	0.511	0.565																															
120	0.484	0.536																															
200	0.412	0.456																															
230	0.395	0.438																															
264	0.379	0.419																															
280	0.372	0.411																															
--	-	-																															
Note: Slanted line shows the range of the rated input voltage.																																	

Model	TUHS10F05																																																					
Item	Power Factor (by Load Current)	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>100V</div></div><div><div>---□---</div><div>Input Volt.</div><div>200V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>230V</div></div></div> <div>Power Factor</div> <div>Load Current [A]</div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Power Factor</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>0.287</td><td>0.269</td><td>0.286</td></tr><tr><td>0.40</td><td>0.449</td><td>0.362</td><td>0.351</td></tr><tr><td>0.80</td><td>0.495</td><td>0.399</td><td>0.383</td></tr><tr><td>1.20</td><td>0.524</td><td>0.423</td><td>0.406</td></tr><tr><td>1.60</td><td>0.547</td><td>0.441</td><td>0.423</td></tr><tr><td>2.00</td><td>0.565</td><td>0.456</td><td>0.438</td></tr><tr><td>2.20</td><td>0.574</td><td>0.463</td><td>0.444</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Power Factor			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.287	0.269	0.286	0.40	0.449	0.362	0.351	0.80	0.495	0.399	0.383	1.20	0.524	0.423	0.406	1.60	0.547	0.441	0.423	2.00	0.565	0.456	0.438	2.20	0.574	0.463	0.444	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Power Factor																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	0.287	0.269	0.286																																																			
0.40	0.449	0.362	0.351																																																			
0.80	0.495	0.399	0.383																																																			
1.20	0.524	0.423	0.406																																																			
1.60	0.547	0.441	0.423																																																			
2.00	0.565	0.456	0.438																																																			
2.20	0.574	0.463	0.444																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						





Model	TUHS10F05	Temperature     25°C Testing Circuitry   Figure A	
Item	Inrush Current		
Object	_____		

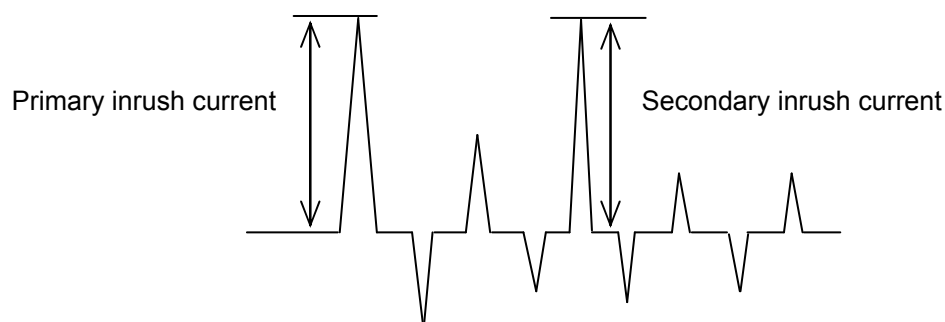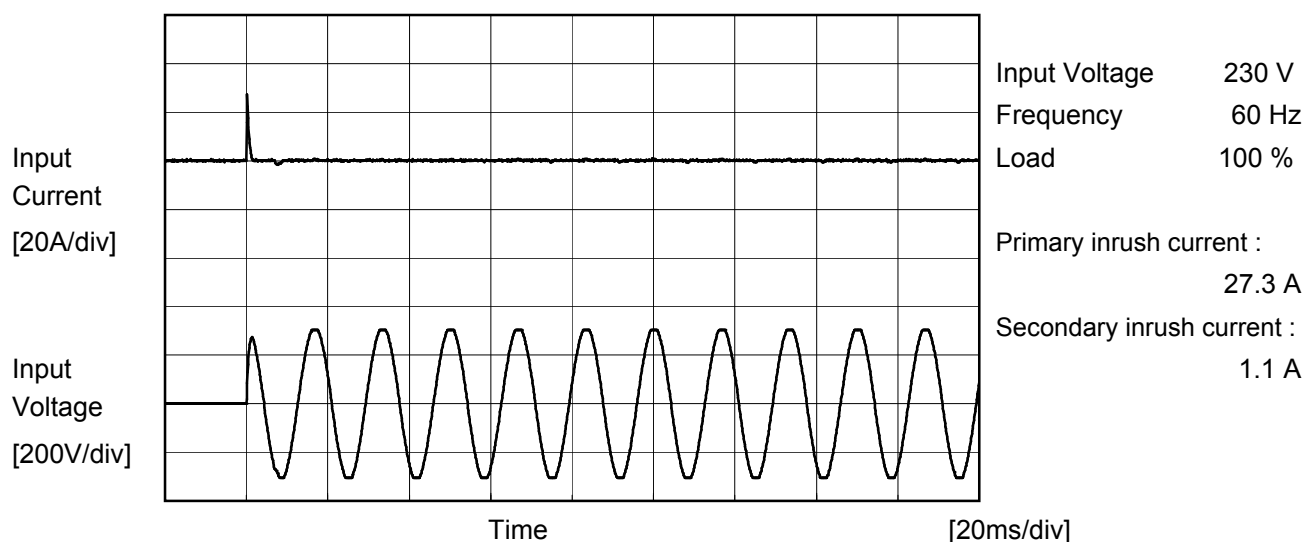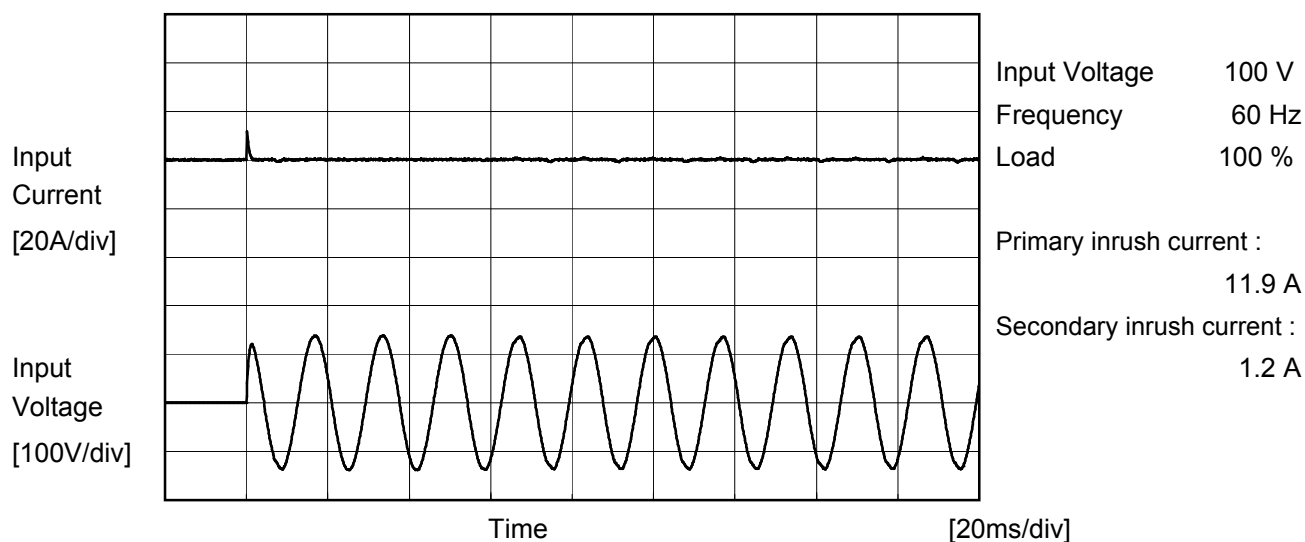

		Temperature 25°C Testing Circuitry Figure B
Model	TUHS10F05	
Item	Leakage Current	
Object	_____	

## 1.Results

[mA]

Standards		Input Volt.			Note
		100 [V]	200 [V]	230 [V]	
DEN-AN	Both phases	0.005	0.008	0.008	Operation
	One of phases	0.004	0.010	0.011	Stand by
IEC60950-1	Both phases	0.003	0.006	0.007	Operation
	One of phases	0.004	0.009	0.010	Stand by

The value for "One of phases" is the reference value only.


## 2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.



There is no FG in TUHS series and it is a reinforced insulation power supply of the class 2.


Model	TUHS10F05																																
Item	Line Regulation	Temperature	25°C																														
		Testing Circuitry	Figure A																														
Object	+5V2A																																
1.Graph		2.Values																															
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <table><thead><tr><th>Input Voltage [V]</th><th>Output Voltage [V] (Load 50%)</th><th>Output Voltage [V] (Load 100%)</th></tr></thead><tbody><tr><td>75</td><td>5.065</td><td>5.063</td></tr><tr><td>85</td><td>5.065</td><td>5.064</td></tr><tr><td>100</td><td>5.065</td><td>5.064</td></tr><tr><td>120</td><td>5.065</td><td>5.064</td></tr><tr><td>200</td><td>5.066</td><td>5.064</td></tr><tr><td>230</td><td>5.065</td><td>5.064</td></tr><tr><td>264</td><td>5.065</td><td>5.064</td></tr><tr><td>280</td><td>5.065</td><td>5.064</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table>		Input Voltage [V]	Output Voltage [V] (Load 50%)	Output Voltage [V] (Load 100%)	75	5.065	5.063	85	5.065	5.064	100	5.065	5.064	120	5.065	5.064	200	5.066	5.064	230	5.065	5.064	264	5.065	5.064	280	5.065	5.064	--	-	-		
Input Voltage [V]	Output Voltage [V] (Load 50%)	Output Voltage [V] (Load 100%)																															
75	5.065	5.063																															
85	5.065	5.064																															
100	5.065	5.064																															
120	5.065	5.064																															
200	5.066	5.064																															
230	5.065	5.064																															
264	5.065	5.064																															
280	5.065	5.064																															
--	-	-																															
Note: Slanted line shows the range of the rated input voltage.																																	

Model	TUHS10F05																																																					
Item	Load Regulation	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	+5V2A																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>100V</div></div><div><div>---□---</div><div>Input Volt.</div><div>200V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>230V</div></div></div> <p>Output Voltage [V]</p> <p>Load Current [A]</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>5.065</td><td>5.066</td><td>5.065</td></tr><tr><td>0.40</td><td>5.065</td><td>5.066</td><td>5.065</td></tr><tr><td>0.80</td><td>5.065</td><td>5.066</td><td>5.065</td></tr><tr><td>1.20</td><td>5.065</td><td>5.065</td><td>5.065</td></tr><tr><td>1.60</td><td>5.064</td><td>5.065</td><td>5.064</td></tr><tr><td>2.00</td><td>5.064</td><td>5.064</td><td>5.064</td></tr><tr><td>2.20</td><td>5.063</td><td>5.064</td><td>5.063</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	5.065	5.066	5.065	0.40	5.065	5.066	5.065	0.80	5.065	5.066	5.065	1.20	5.065	5.065	5.065	1.60	5.064	5.065	5.064	2.00	5.064	5.064	5.064	2.20	5.063	5.064	5.063	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	5.065	5.066	5.065																																																			
0.40	5.065	5.066	5.065																																																			
0.80	5.065	5.066	5.065																																																			
1.20	5.065	5.065	5.065																																																			
1.60	5.064	5.065	5.064																																																			
2.00	5.064	5.064	5.064																																																			
2.20	5.063	5.064	5.063																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

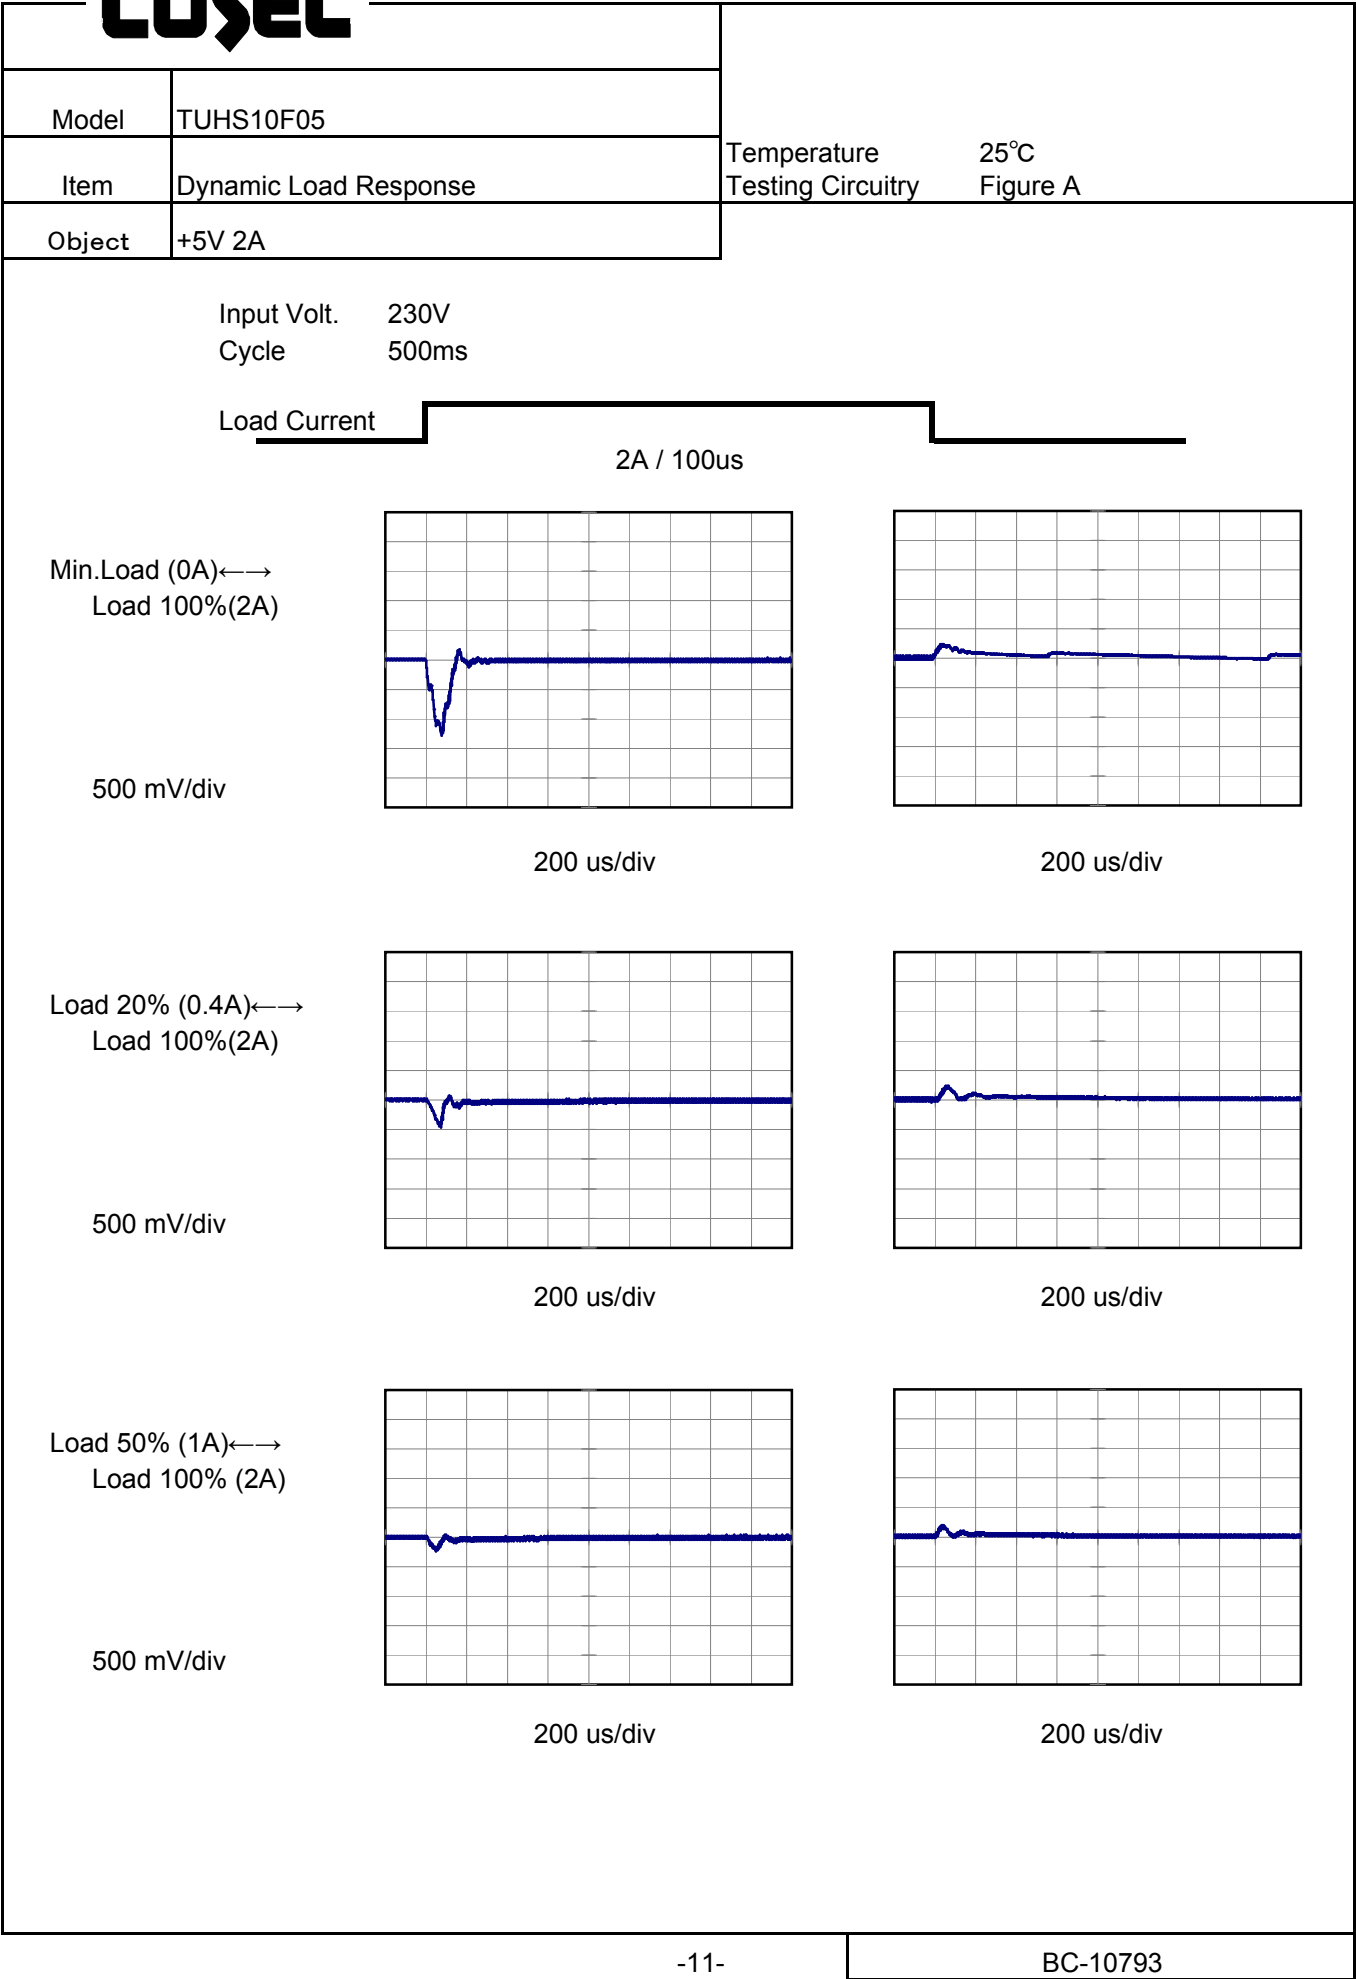


Model	TUHS10F05																																								
Item	Ripple Voltage (by Load Current)	Temperature	25°C																																						
Object	+5V2A	Testing Circuitry	Figure C																																						
1.Graph		2.Values																																							
<div><div><div><div></div><div>Input Volt. 100V</div></div><div><div></div><div>Input Volt. 230V</div></div></div><div><p>Ripple Voltage [mV]</p><p>Load Current [A]</p></div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple Voltage [mV]</th></tr><tr><th>Input Volt. 100 [V]</th><th>Input Volt. 230 [V]</th></tr><tr><td>0.00</td><td>40</td><td>100</td></tr><tr><td>0.40</td><td>10</td><td>10</td></tr><tr><td>0.80</td><td>10</td><td>10</td></tr><tr><td>1.20</td><td>10</td><td>15</td></tr><tr><td>1.60</td><td>15</td><td>15</td></tr><tr><td>2.00</td><td>25</td><td>15</td></tr><tr><td>2.20</td><td>35</td><td>15</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple Voltage [mV]		Input Volt. 100 [V]	Input Volt. 230 [V]	0.00	40	100	0.40	10	10	0.80	10	10	1.20	10	15	1.60	15	15	2.00	25	15	2.20	35	15	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																								
	Input Volt. 100 [V]	Input Volt. 230 [V]																																							
0.00	40	100																																							
0.40	10	10																																							
0.80	10	10																																							
1.20	10	15																																							
1.60	15	15																																							
2.00	25	15																																							
2.20	35	15																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<p>Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																									
<div><div><div></div><div>T1: Due to AC Input Line</div></div><div><div></div><div>T2: Due to Switching</div></div></div> <div><p>Ripple [mVp-p]</p><p>T1</p><p>T2</p></div>																																									
Fig. Complex Ripple Wave Form																																									

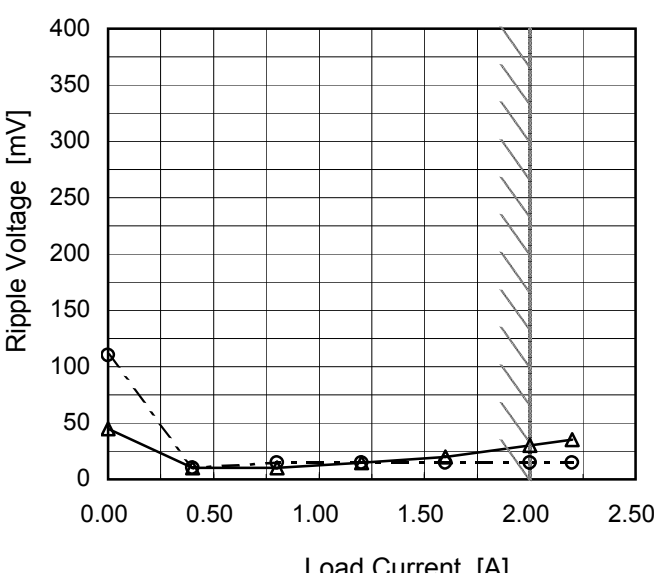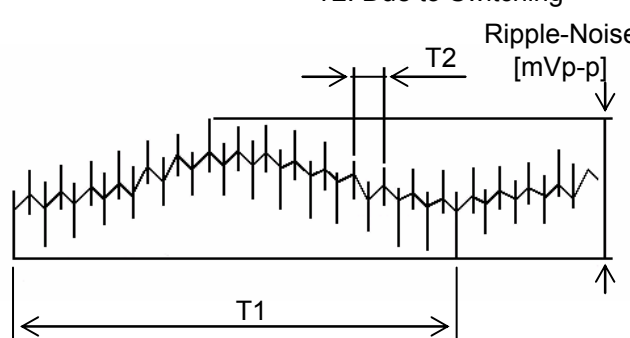Model	TUHS10F05																																								
Item	Ripple-Noise	Temperature	25°C																																						
		Testing Circuitry	Figure C																																						
Object	+5V2A																																								
1.Graph		2.Values																																							
<div><div><div><div></div><div>Input Volt. 100V</div></div><div><div></div><div>Input Volt. 230V</div></div></div><div></div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple-Noise [mV]</th></tr><tr><th>Input Volt. 100 [V]</th><th>Input Volt. 230 [V]</th></tr><tr><td>0.00</td><td>45</td><td>110</td></tr><tr><td>0.40</td><td>10</td><td>10</td></tr><tr><td>0.80</td><td>10</td><td>15</td></tr><tr><td>1.20</td><td>15</td><td>15</td></tr><tr><td>1.60</td><td>20</td><td>15</td></tr><tr><td>2.00</td><td>30</td><td>15</td></tr><tr><td>2.20</td><td>35</td><td>15</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple-Noise [mV]		Input Volt. 100 [V]	Input Volt. 230 [V]	0.00	45	110	0.40	10	10	0.80	10	15	1.20	15	15	1.60	20	15	2.00	30	15	2.20	35	15	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 100 [V]	Input Volt. 230 [V]																																							
0.00	45	110																																							
0.40	10	10																																							
0.80	10	15																																							
1.20	15	15																																							
1.60	20	15																																							
2.00	30	15																																							
2.20	35	15																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<div>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</div>																																									
<div><div><div><div></div><div>T1: Due to AC Input Line</div></div><div><div></div><div>T2: Due to Switching</div></div></div><div></div></div>																																									
Fig. Complex Ripple Wave Form																																									

	
Model	TUHS10F05
Item	Ripple Voltage (by Ambient Temp.)
Object	+5V2A

## 1. Graph

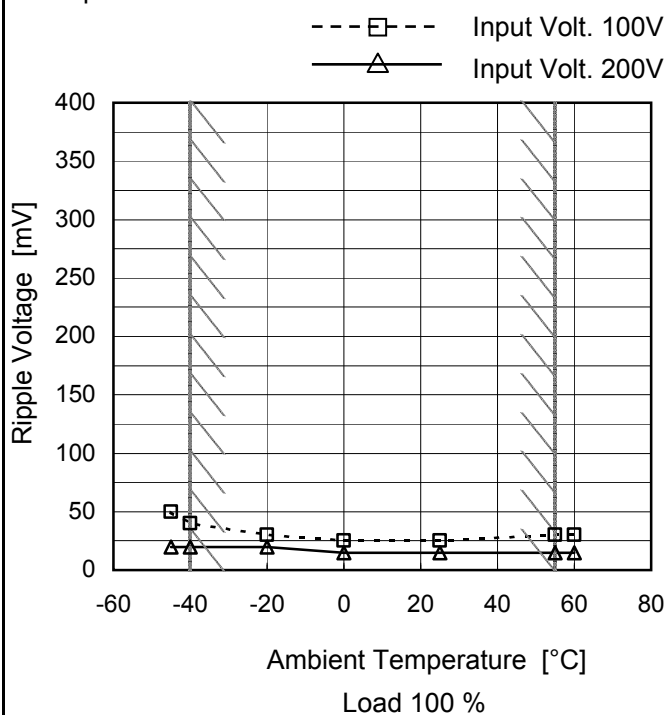

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.

## 2.Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Input Volt. 100V	Input Volt. 230V
-45	50	20
-40	40	20
-20	30	20
0	25	15
25	25	15
55	30	15
60	30	15
--	-	-
--	-	-
--	-	-
--	-	-



Model	TUHS10F05																																																					
Item	Ambient Temperature Drift	Testing Circuitry    Figure A																																																				
Object	+5V2A																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>100V</div></div><div><div>---□---</div><div>Input Volt.</div><div>200V</div></div><div><div>---○---</div><div>Input Volt.</div><div>230V</div></div></div> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>-45</td><td>5.063</td><td>5.064</td><td>5.064</td></tr><tr><td>-40</td><td>5.069</td><td>5.070</td><td>5.070</td></tr><tr><td>-20</td><td>5.072</td><td>5.073</td><td>5.073</td></tr><tr><td>0</td><td>5.071</td><td>5.071</td><td>5.071</td></tr><tr><td>25</td><td>5.064</td><td>5.064</td><td>5.064</td></tr><tr><td>55</td><td>5.055</td><td>5.056</td><td>5.056</td></tr><tr><td>60</td><td>5.053</td><td>5.053</td><td>5.053</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	-45	5.063	5.064	5.064	-40	5.069	5.070	5.070	-20	5.072	5.073	5.073	0	5.071	5.071	5.071	25	5.064	5.064	5.064	55	5.055	5.056	5.056	60	5.053	5.053	5.053	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
-45	5.063	5.064	5.064																																																			
-40	5.069	5.070	5.070																																																			
-20	5.072	5.073	5.073																																																			
0	5.071	5.071	5.071																																																			
25	5.064	5.064	5.064																																																			
55	5.055	5.056	5.056																																																			
60	5.053	5.053	5.053																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			



Model		TUHS10F05	Testing Circuitry Figure A
Item		Output Voltage Accuracy	
Object		+5V2A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 85 - 264V

Load Current : 0 - 2A


\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ratio) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

### 2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	0	264	0	5.076	±11	±0.2
Minimum Voltage	55	264	2	5.054		


Model	TUHS10F05																								
Item	Time Lapse Drift	Temperature	25°C																						
		Testing Circuitry	Figure A																						
Object	+5V2A																								
1.Graph		2.Values																							
<div><div><div>5.12</div><div>5.10</div><div>5.08</div><div>5.06</div><div>5.04</div><div>5.02</div><div>5.00</div><div>4.98</div></div><div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div></div><div><div>Output Voltage [V]</div><div>Time [H]</div></div><div><div>Input Volt.</div><div>100V</div></div><div><div>Load</div><div>100%</div></div></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>5.064</td></tr><tr><td>0.5</td><td>5.059</td></tr><tr><td>1.0</td><td>5.059</td></tr><tr><td>2.0</td><td>5.059</td></tr><tr><td>3.0</td><td>5.059</td></tr><tr><td>4.0</td><td>5.059</td></tr><tr><td>5.0</td><td>5.059</td></tr><tr><td>6.0</td><td>5.059</td></tr><tr><td>7.0</td><td>5.059</td></tr><tr><td>8.0</td><td>5.059</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	5.064	0.5	5.059	1.0	5.059	2.0	5.059	3.0	5.059	4.0	5.059	5.0	5.059	6.0	5.059	7.0	5.059	8.0	5.059
Time since start [H]	Output Voltage [V]																								
0.0	5.064																								
0.5	5.059																								
1.0	5.059																								
2.0	5.059																								
3.0	5.059																								
4.0	5.059																								
5.0	5.059																								
6.0	5.059																								
7.0	5.059																								
8.0	5.059																								
* The characteristic of AC230V is equal.																									

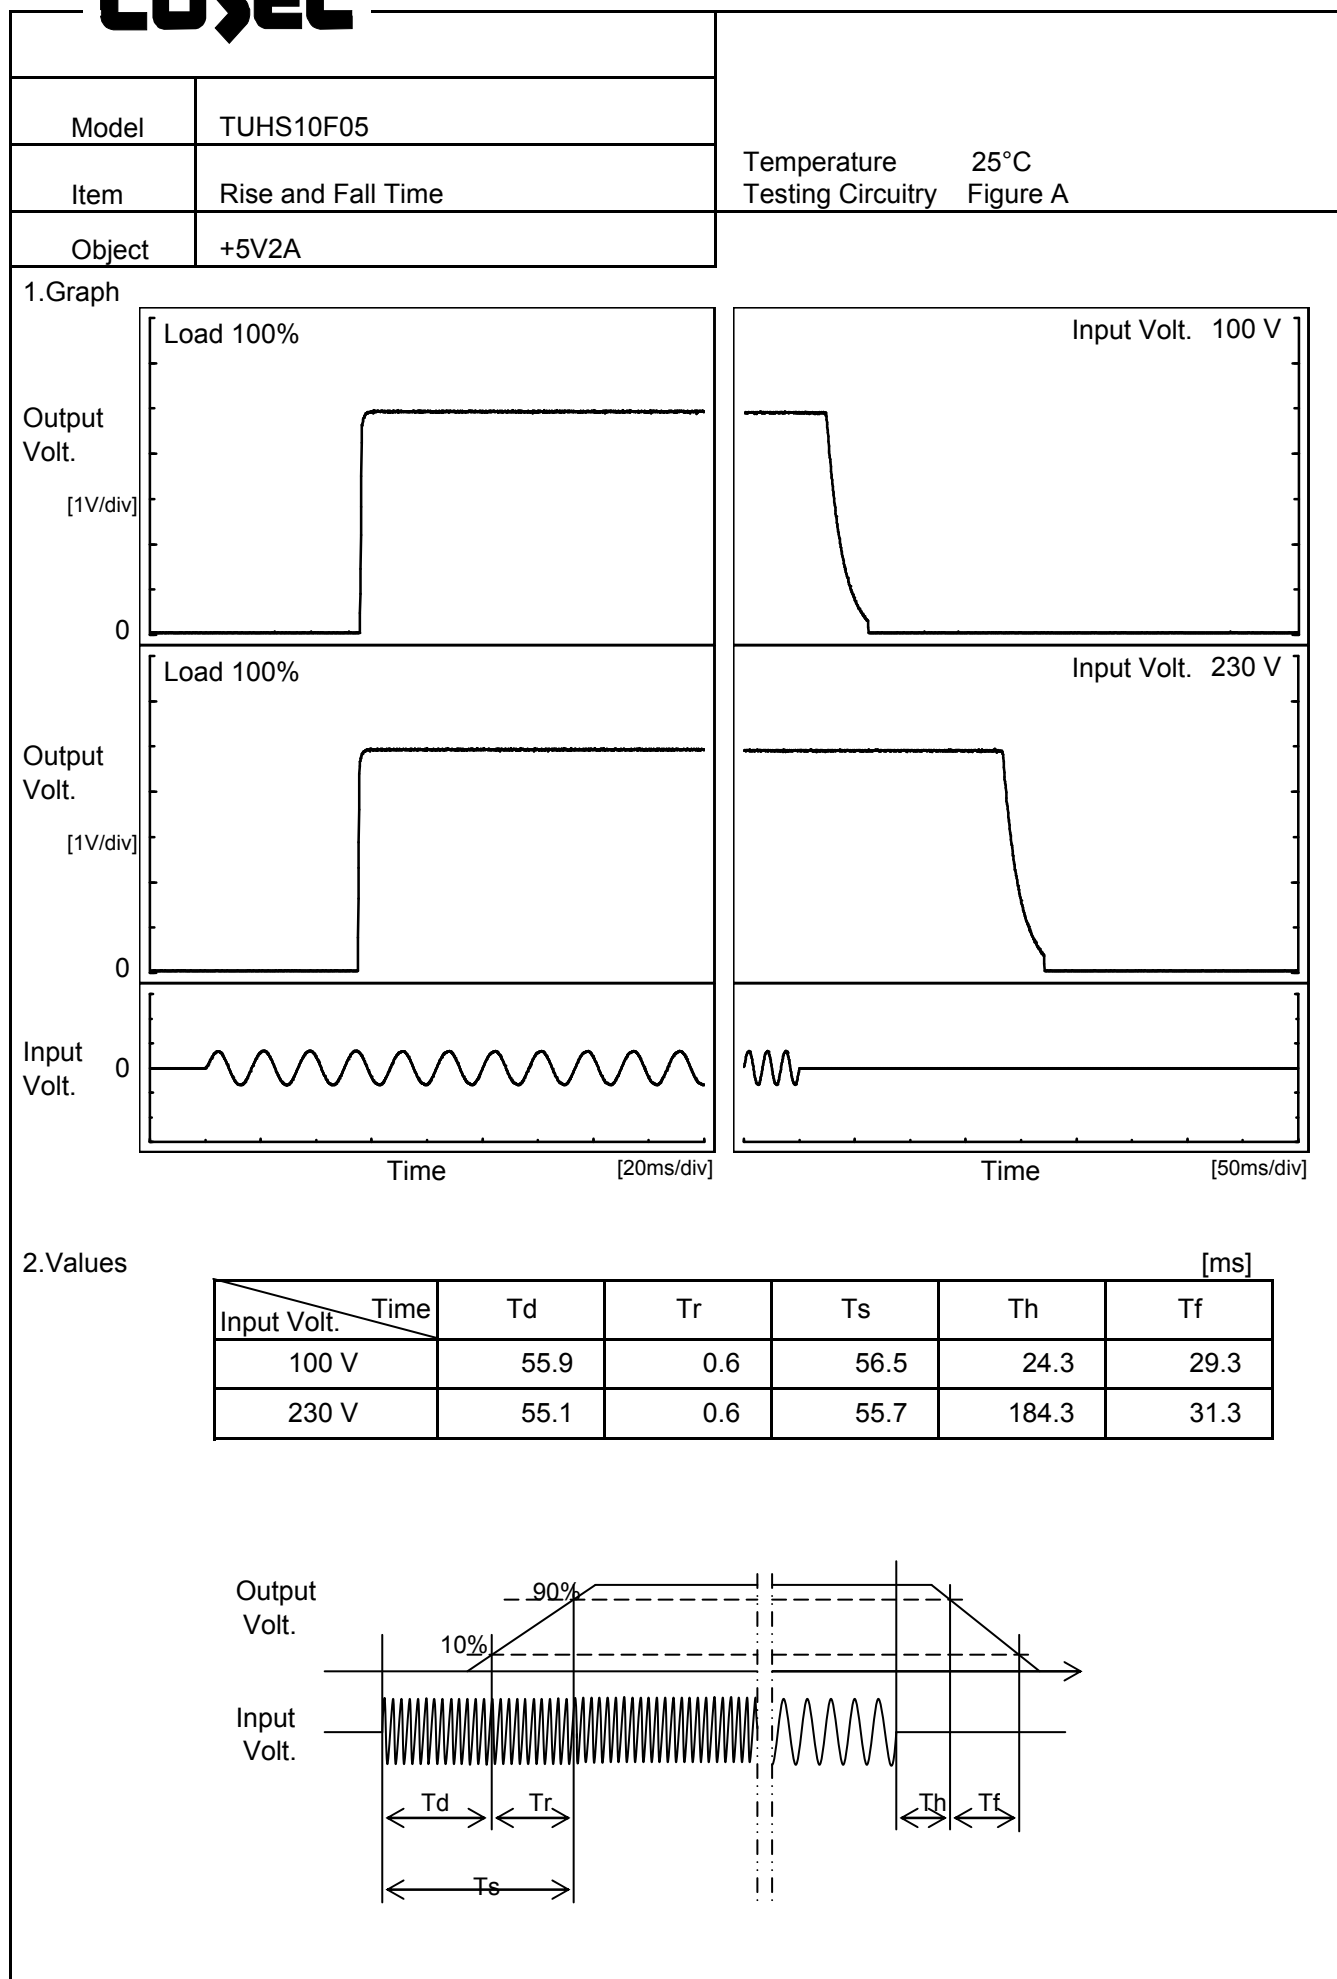

Model	TUHS10F05																																		
Item	Hold-Up Time	Temperature	25°C																																
		Testing Circuitry	Figure A																																
Object	+5V2A																																		
1.Graph		2.Values																																	
<div><div>---□--- Load 50%</div><div>—△— Load 100%</div></div> <p>Hold-Up Time [ms]</p> <p>Input Voltage [V]</p> <p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy. Note: Slanted line shows the range of the rated input voltage.</p>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Hold-Up Time [ms]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>28</td><td>8</td></tr><tr><td>85</td><td>39</td><td>14</td></tr><tr><td>100</td><td>59</td><td>24</td></tr><tr><td>120</td><td>91</td><td>40</td></tr><tr><td>200</td><td>280</td><td>135</td></tr><tr><td>230</td><td>378</td><td>184</td></tr><tr><td>264</td><td>507</td><td>250</td></tr><tr><td>280</td><td>575</td><td>285</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Input Voltage [V]	Hold-Up Time [ms]		Load 50%	Load 100%	75	28	8	85	39	14	100	59	24	120	91	40	200	280	135	230	378	184	264	507	250	280	575	285	--	-	-
Input Voltage [V]	Hold-Up Time [ms]																																		
	Load 50%	Load 100%																																	
75	28	8																																	
85	39	14																																	
100	59	24																																	
120	91	40																																	
200	280	135																																	
230	378	184																																	
264	507	250																																	
280	575	285																																	
--	-	-																																	

Model	TUHS10F05																																																					
Item	Instantaneous Interruption Compensation	Temperature	25°C																																																			
Object	+5V2A	Testing Circuitry	Figure A																																																			
1.Graph		2.Values																																																				
<div><div>—△— Input Volt. 100V ---□--- Input Volt. 200V -·-○-·- Input Volt. 230V</div><p>Instantaneous Compensation Time [ms]</p><p>Load Current [A]</p></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Time [ms]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr><tr><td>0.40</td><td>80</td><td>524</td><td>701</td></tr><tr><td>0.80</td><td>66</td><td>427</td><td>572</td></tr><tr><td>1.20</td><td>52</td><td>329</td><td>442</td></tr><tr><td>1.60</td><td>38</td><td>232</td><td>313</td></tr><tr><td>2.00</td><td>24</td><td>135</td><td>184</td></tr><tr><td>2.20</td><td>17</td><td>86</td><td>120</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Time [ms]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	-	-	-	0.40	80	524	701	0.80	66	427	572	1.20	52	329	442	1.60	38	232	313	2.00	24	135	184	2.20	17	86	120	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Time [ms]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	-	-	-																																																			
0.40	80	524	701																																																			
0.80	66	427	572																																																			
1.20	52	329	442																																																			
1.60	38	232	313																																																			
2.00	24	135	184																																																			
2.20	17	86	120																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

		Testing Circuitry    Figure A																																						
Model	TUHS10F05																																							
Item	Minimum Input Voltage for Regulated Output Voltage																																							
Object	+5V2A																																							
1.Graph		2.Values																																						
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>—△—</div><div>Load 100%</div></div></div> <p>Input Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								
		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Input Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>-45</td><td>43</td><td>61</td></tr><tr><td>-40</td><td>43</td><td>61</td></tr><tr><td>-20</td><td>38</td><td>54</td></tr><tr><td>0</td><td>37</td><td>53</td></tr><tr><td>25</td><td>37</td><td>52</td></tr><tr><td>55</td><td>37</td><td>51</td></tr><tr><td>60</td><td>37</td><td>51</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-45	43	61	-40	43	61	-20	38	54	0	37	53	25	37	52	55	37	51	60	37	51	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-45	43	61																																						
-40	43	61																																						
-20	38	54																																						
0	37	53																																						
25	37	52																																						
55	37	51																																						
60	37	51																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						

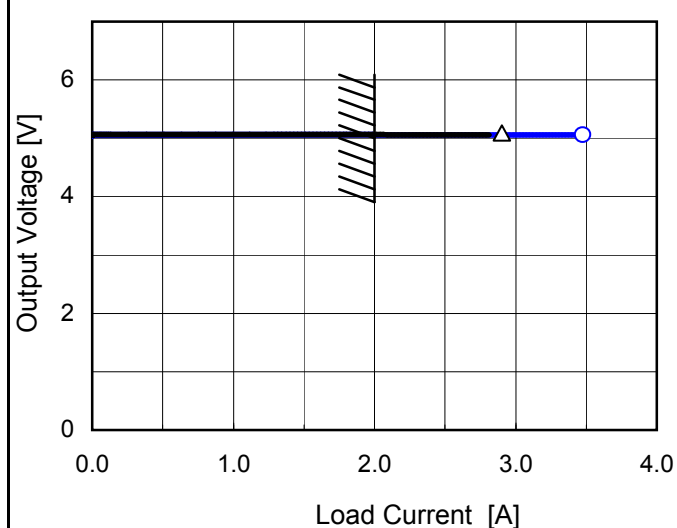Model	TUHS10F05																																																				
Item	Overcurrent Protection	Temperature	25°C																																																		
Object	+5V2A	Testing Circuitry	Figure A																																																		
1.Graph		2.Values																																																			
<div><div><div></div><div>△ Input Volt. 100V</div></div><div><div></div><div>○ Input Volt. 230V</div></div></div>  <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="2">Load Current [A]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>5</td><td>2.81</td><td>3.44</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Output Voltage [V]	Load Current [A]		Input Volt. 100[V]	Input Volt. 230[V]	5	2.81	3.44	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-
Output Voltage [V]	Load Current [A]																																																				
	Input Volt. 100[V]	Input Volt. 230[V]																																																			
5	2.81	3.44																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			
--	-	-																																																			



Model	TUHS10F05																																																																												
Item	Overvoltage Protection	Testing Circuitry    Figure A																																																																											
Object	+5V2A																																																																												
1.Graph		2.Values																																																																											
<div><div><div>—△— Input Volt. 100V</div><div>---□--- Input Volt. 230V</div></div><table><thead><tr><th>Ambient Temperature [°C]</th><th>Operating Point [V] (100V)</th><th>Operating Point [V] (230V)</th></tr></thead><tbody><tr><td>-45</td><td>6.20</td><td>6.08</td></tr><tr><td>-40</td><td>6.26</td><td>6.10</td></tr><tr><td>-20</td><td>6.35</td><td>6.21</td></tr><tr><td>0</td><td>6.42</td><td>6.34</td></tr><tr><td>25</td><td>6.52</td><td>6.44</td></tr><tr><td>55</td><td>6.65</td><td>6.58</td></tr><tr><td>60</td><td>6.66</td><td>6.59</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table><div>Operating Point [V]</div><div>Ambient Temperature [°C]</div><div>Load 30%</div></div> <div>Note: Slanted line shows the range of the rated ambient temperature.</div>		Ambient Temperature [°C]	Operating Point [V] (100V)	Operating Point [V] (230V)	-45	6.20	6.08	-40	6.26	6.10	-20	6.35	6.21	0	6.42	6.34	25	6.52	6.44	55	6.65	6.58	60	6.66	6.59	--	-	-	--	-	-	--	-	-	--	-	-	<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Operating Point [V]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>-45</td><td>6.20</td><td>6.08</td></tr><tr><td>-40</td><td>6.26</td><td>6.10</td></tr><tr><td>-20</td><td>6.35</td><td>6.21</td></tr><tr><td>0</td><td>6.42</td><td>6.34</td></tr><tr><td>25</td><td>6.52</td><td>6.44</td></tr><tr><td>55</td><td>6.65</td><td>6.58</td></tr><tr><td>60</td><td>6.66</td><td>6.59</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Ambient Temperature [°C]	Operating Point [V]		Input Volt. 100[V]	Input Volt. 230[V]	-45	6.20	6.08	-40	6.26	6.10	-20	6.35	6.21	0	6.42	6.34	25	6.52	6.44	55	6.65	6.58	60	6.66	6.59	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Operating Point [V] (100V)	Operating Point [V] (230V)																																																																											
-45	6.20	6.08																																																																											
-40	6.26	6.10																																																																											
-20	6.35	6.21																																																																											
0	6.42	6.34																																																																											
25	6.52	6.44																																																																											
55	6.65	6.58																																																																											
60	6.66	6.59																																																																											
--	-	-																																																																											
--	-	-																																																																											
--	-	-																																																																											
--	-	-																																																																											
Ambient Temperature [°C]	Operating Point [V]																																																																												
	Input Volt. 100[V]	Input Volt. 230[V]																																																																											
-45	6.20	6.08																																																																											
-40	6.26	6.10																																																																											
-20	6.35	6.21																																																																											
0	6.42	6.34																																																																											
25	6.52	6.44																																																																											
55	6.65	6.58																																																																											
60	6.66	6.59																																																																											
--	-	-																																																																											
--	-	-																																																																											
--	-	-																																																																											
--	-	-																																																																											

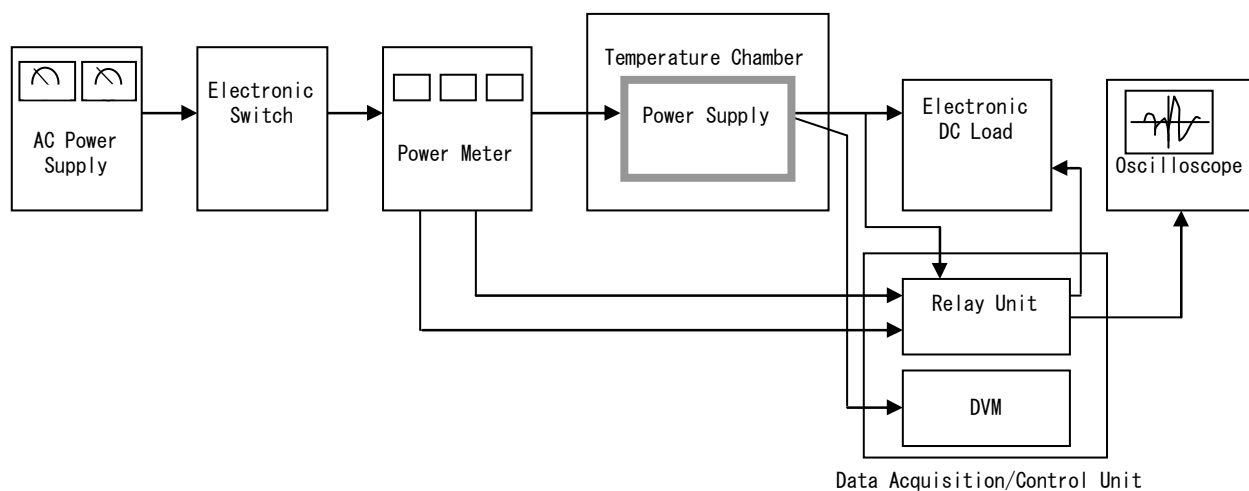


Figure A

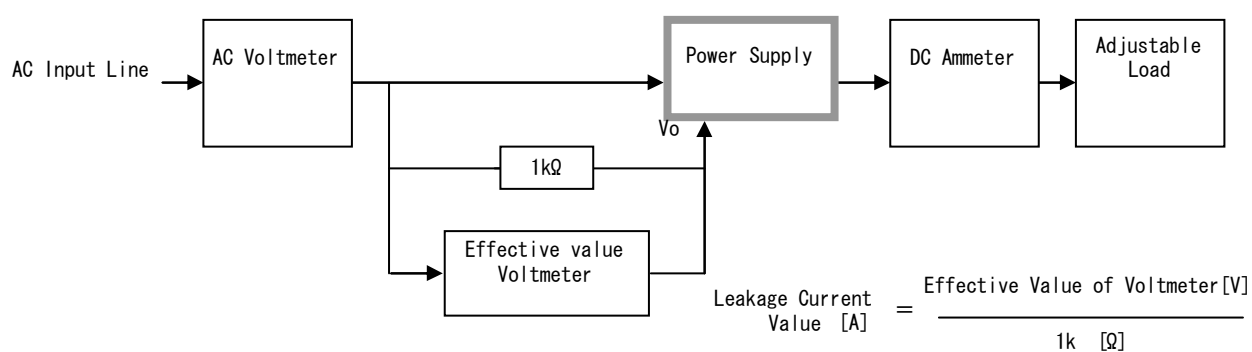


Figure B ( DEN-AN )

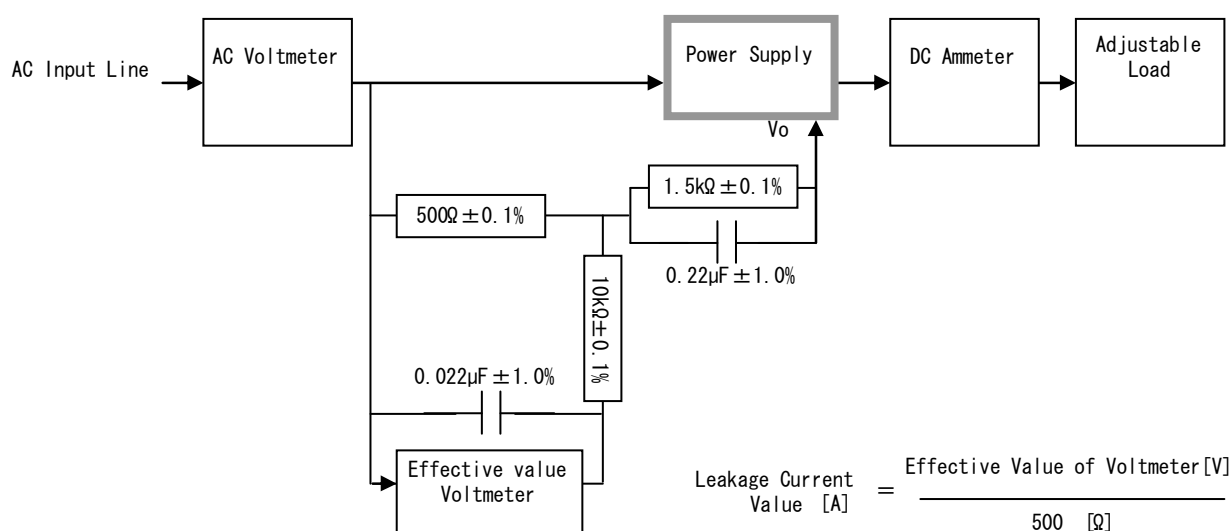


Figure B ( IEC60950-1 )

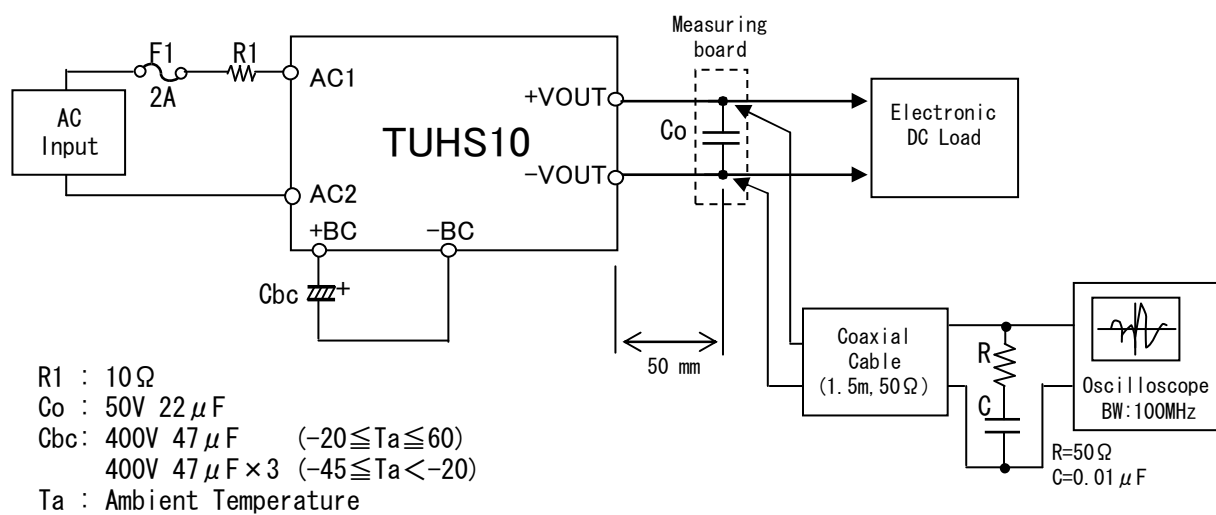


Figure C