

Model

TUHS3F05

Item


Switching Frequency

Temperature 25°C
Testing Circuitry Figure A


Object

1.Graph

Input Voltage : AC100V

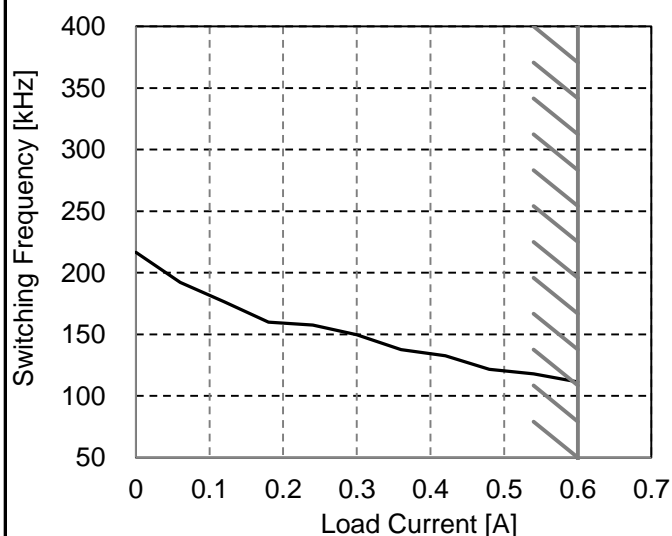

Input Voltage : AC200V

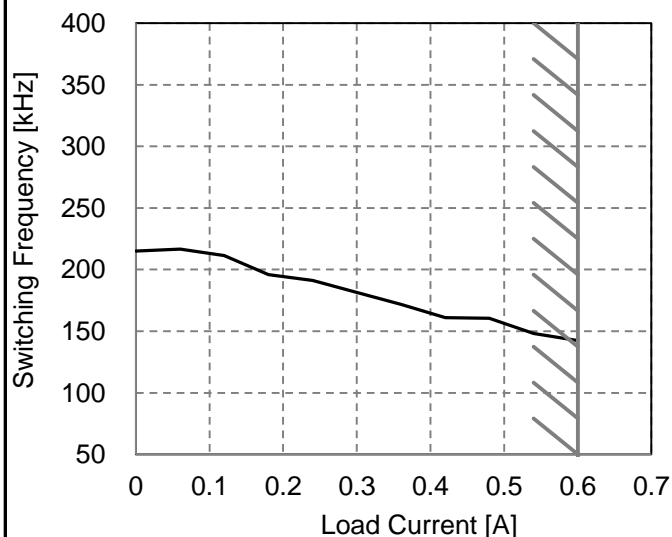

2.Values

Load Current [A]	Switching Frequency [kHz]
0.00	217
0.06	192
0.12	176
0.18	160
0.24	158
0.30	150
0.36	138
0.42	133
0.48	122
0.54	118
0.60	111

Load Current [A]	Switching Frequency [kHz]
0.00	215
0.06	217
0.12	211
0.18	196
0.24	191
0.30	181
0.36	172
0.42	161
0.48	161
0.54	148
0.60	142

-Switching frequency of TUHS changes depending on load current and input voltage.

-When load current is low, TUHS operates intermittently, so switching frequency would not become constant.