

Model

TUHS3F24

Item


Switching Frequency

Temperature 25°C
Testing Circuitry Figure A


Object

1.Graph

Input Voltage : AC100V

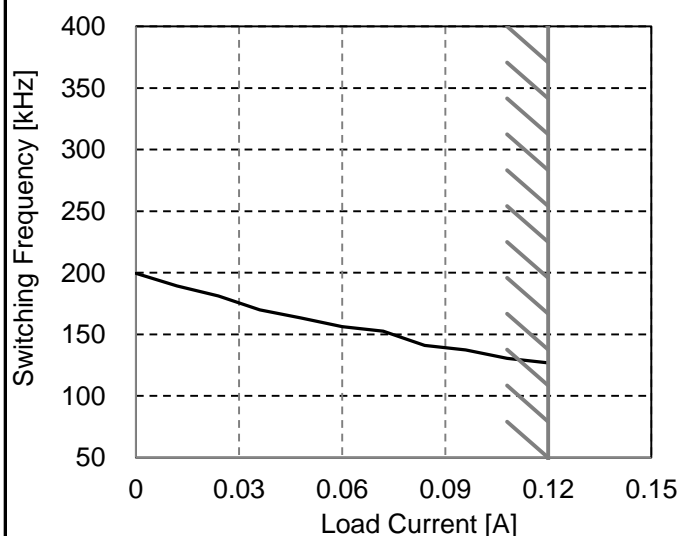

Input Voltage : AC200V

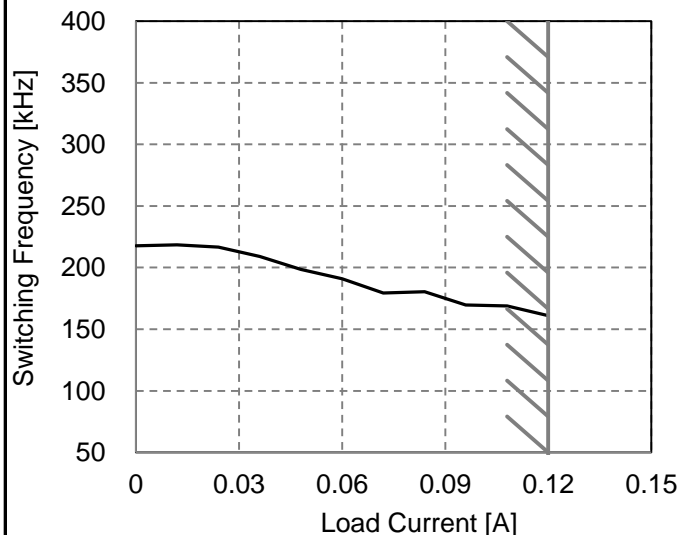

2.Values

Load Current [A]	Switching Frequency [kHz]
0.00	199
0.01	189
0.02	181
0.04	170
0.05	163
0.06	156
0.07	153
0.08	141
0.10	137
0.11	131
0.12	127

Load Current [A]	Switching Frequency [kHz]
0.00	218
0.01	218
0.02	217
0.04	209
0.05	199
0.06	191
0.07	179
0.08	180
0.10	170
0.11	169
0.12	161

-Switching frequency of TUHS changes depending on load current and input voltage.

-When load current is low, TUHS operates intermittently, so switching frequency would not become constant.