



TEST DATA OF ZTW1R52412

(24.0V INPUT)

Regulated DC Power Supply

Date : Mar. 5. 1998

Approved by : N. Shiraishi
Design Manager

Prepared by : T. Tsuri
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	6
リップルノイズ	
6. Overcurrent Protection	8
過電流保護	
7. Dynamic Load Response	9
動的負荷変動	
8. Rise and Fall Time	11
立上り、立下がり時間	
9. Ambient Temperature Drift	13
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	14
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	15
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	16
経時ドリフト	
13. Output Voltage Accuracy	17
定電圧精度	
14. Condensation	18
結露特性	
15. Figure of Testing Circuitry	20
測定回路図	


(Final Page 20)

COSEL

Model ZTW1R52412

Item Line Regulation 静的入力変動


Object +12V0.065A

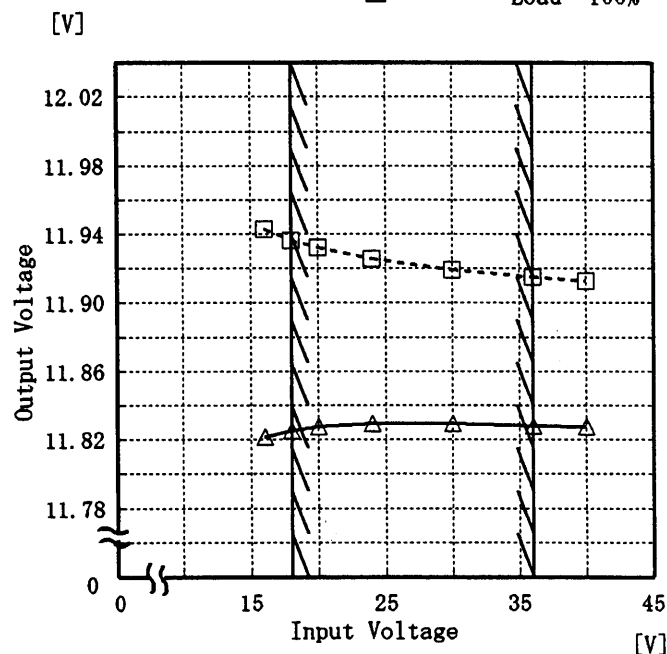Temperature 25°C
Testing Circuitry Figure A1. Graph
-----□----- Load 50%
-----△----- Load 100%

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
16.0	11.943	11.822
18.0	11.936	11.825
20.0	11.932	11.827
24.0	11.926	11.829
30.0	11.919	11.829
36.0	11.915	11.828
40.0	11.913	11.828
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

Object -12V0.065A

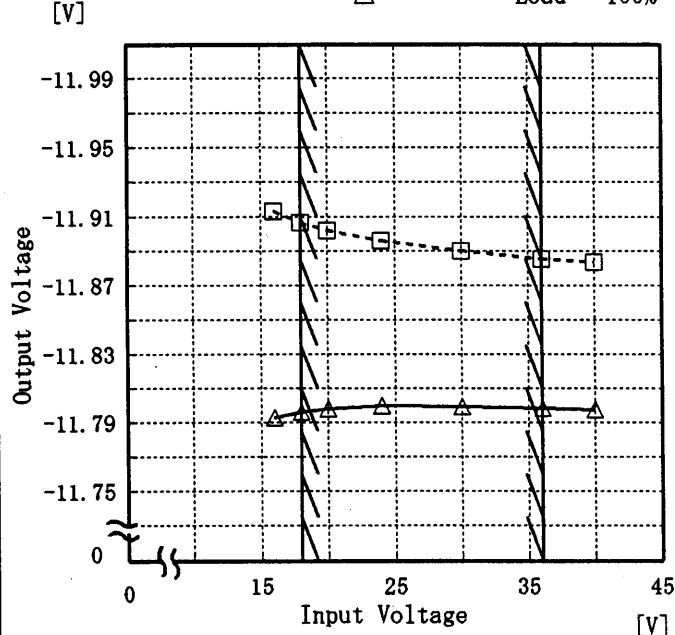1. Graph
-----□----- Load 50%
-----△----- Load 100%

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
16.0	-11.913	-11.793
18.0	-11.906	-11.796
20.0	-11.902	-11.798
24.0	-11.896	-11.800
30.0	-11.890	-11.799
36.0	-11.885	-11.798
40.0	-11.883	-11.798
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

COSEL


Model ZTW1R52412

Item Efficiency 効率

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph

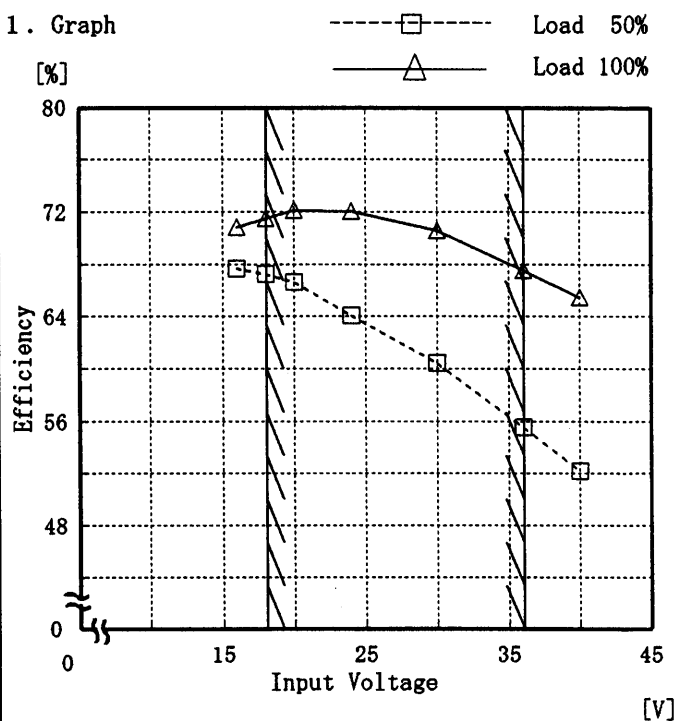

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。


2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
16.0	67.7	70.8
18.0	67.3	71.5
20.0	66.6	72.1
24.0	64.1	72.1
30.0	60.4	70.6
36.0	55.6	67.5
40.0	52.2	65.5
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—


COSEL

Model ZTW1R52412		Temperature 25°C																																													
Item	Load Regulation 静的負荷変動	Testing Circuitry Figure A																																													
Object	+12V0.065A																																														
1. Graph <div> —△— Input Volt. 18.0V - -□- - Input Volt. 24.0V —○— Input Volt. 36.0V </div>		2. Values <table border="1"> <thead> <tr> <th>Load Current [A]</th><th>Input Volt. 18.0[V] Output Volt. [V]</th><th>Input Volt. 24.0[V] Output Volt. [V]</th><th>Input Volt. 36.0[V] Output Volt. [V]</th></tr> </thead> <tbody> <tr><td>0.000</td><td>12.097</td><td>12.090</td><td>12.087</td></tr> <tr><td>0.010</td><td>12.010</td><td>11.999</td><td>11.988</td></tr> <tr><td>0.020</td><td>11.967</td><td>11.956</td><td>11.946</td></tr> <tr><td>0.030</td><td>11.931</td><td>11.922</td><td>11.913</td></tr> <tr><td>0.040</td><td>11.895</td><td>11.890</td><td>11.882</td></tr> <tr><td>0.050</td><td>11.862</td><td>11.861</td><td>11.856</td></tr> <tr><td>0.060</td><td>11.828</td><td>11.832</td><td>11.830</td></tr> <tr><td>0.065</td><td>11.811</td><td>11.818</td><td>11.818</td></tr> <tr><td>0.072</td><td>11.788</td><td>11.799</td><td>11.802</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 18.0[V] Output Volt. [V]	Input Volt. 24.0[V] Output Volt. [V]	Input Volt. 36.0[V] Output Volt. [V]	0.000	12.097	12.090	12.087	0.010	12.010	11.999	11.988	0.020	11.967	11.956	11.946	0.030	11.931	11.922	11.913	0.040	11.895	11.890	11.882	0.050	11.862	11.861	11.856	0.060	11.828	11.832	11.830	0.065	11.811	11.818	11.818	0.072	11.788	11.799	11.802	—	—	—	—
Load Current [A]	Input Volt. 18.0[V] Output Volt. [V]	Input Volt. 24.0[V] Output Volt. [V]	Input Volt. 36.0[V] Output Volt. [V]																																												
0.000	12.097	12.090	12.087																																												
0.010	12.010	11.999	11.988																																												
0.020	11.967	11.956	11.946																																												
0.030	11.931	11.922	11.913																																												
0.040	11.895	11.890	11.882																																												
0.050	11.862	11.861	11.856																																												
0.060	11.828	11.832	11.830																																												
0.065	11.811	11.818	11.818																																												
0.072	11.788	11.799	11.802																																												
—	—	—	—																																												
Object -12V0.065A																																															
1. Graph <div> —△— Input Volt. 18.0V - -□- - Input Volt. 24.0V —○— Input Volt. 36.0V </div>		2. Values <table border="1"> <thead> <tr> <th>Load Current [A]</th><th>Input Volt. 18.0[V] Output Volt. [V]</th><th>Input Volt. 24.0[V] Output Volt. [V]</th><th>Input Volt. 36.0[V] Output Volt. [V]</th></tr> </thead> <tbody> <tr><td>0.000</td><td>-12.057</td><td>-12.049</td><td>-12.044</td></tr> <tr><td>0.010</td><td>-11.983</td><td>-11.972</td><td>-11.961</td></tr> <tr><td>0.020</td><td>-11.942</td><td>-11.931</td><td>-11.920</td></tr> <tr><td>0.030</td><td>-11.906</td><td>-11.897</td><td>-11.887</td></tr> <tr><td>0.040</td><td>-11.872</td><td>-11.865</td><td>-11.857</td></tr> <tr><td>0.050</td><td>-11.839</td><td>-11.836</td><td>-11.830</td></tr> <tr><td>0.060</td><td>-11.806</td><td>-11.808</td><td>-11.805</td></tr> <tr><td>0.065</td><td>-11.789</td><td>-11.794</td><td>-11.793</td></tr> <tr><td>0.072</td><td>-11.766</td><td>-11.775</td><td>-11.776</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 18.0[V] Output Volt. [V]	Input Volt. 24.0[V] Output Volt. [V]	Input Volt. 36.0[V] Output Volt. [V]	0.000	-12.057	-12.049	-12.044	0.010	-11.983	-11.972	-11.961	0.020	-11.942	-11.931	-11.920	0.030	-11.906	-11.897	-11.887	0.040	-11.872	-11.865	-11.857	0.050	-11.839	-11.836	-11.830	0.060	-11.806	-11.808	-11.805	0.065	-11.789	-11.794	-11.793	0.072	-11.766	-11.775	-11.776	—	—	—	—
Load Current [A]	Input Volt. 18.0[V] Output Volt. [V]	Input Volt. 24.0[V] Output Volt. [V]	Input Volt. 36.0[V] Output Volt. [V]																																												
0.000	-12.057	-12.049	-12.044																																												
0.010	-11.983	-11.972	-11.961																																												
0.020	-11.942	-11.931	-11.920																																												
0.030	-11.906	-11.897	-11.887																																												
0.040	-11.872	-11.865	-11.857																																												
0.050	-11.839	-11.836	-11.830																																												
0.060	-11.806	-11.808	-11.805																																												
0.065	-11.789	-11.794	-11.793																																												
0.072	-11.766	-11.775	-11.776																																												
—	—	—	—																																												
Note: Slanted line shows the range of the rated load current. (注)斜線は定格負荷電流範囲を示す。																																															


COSEL

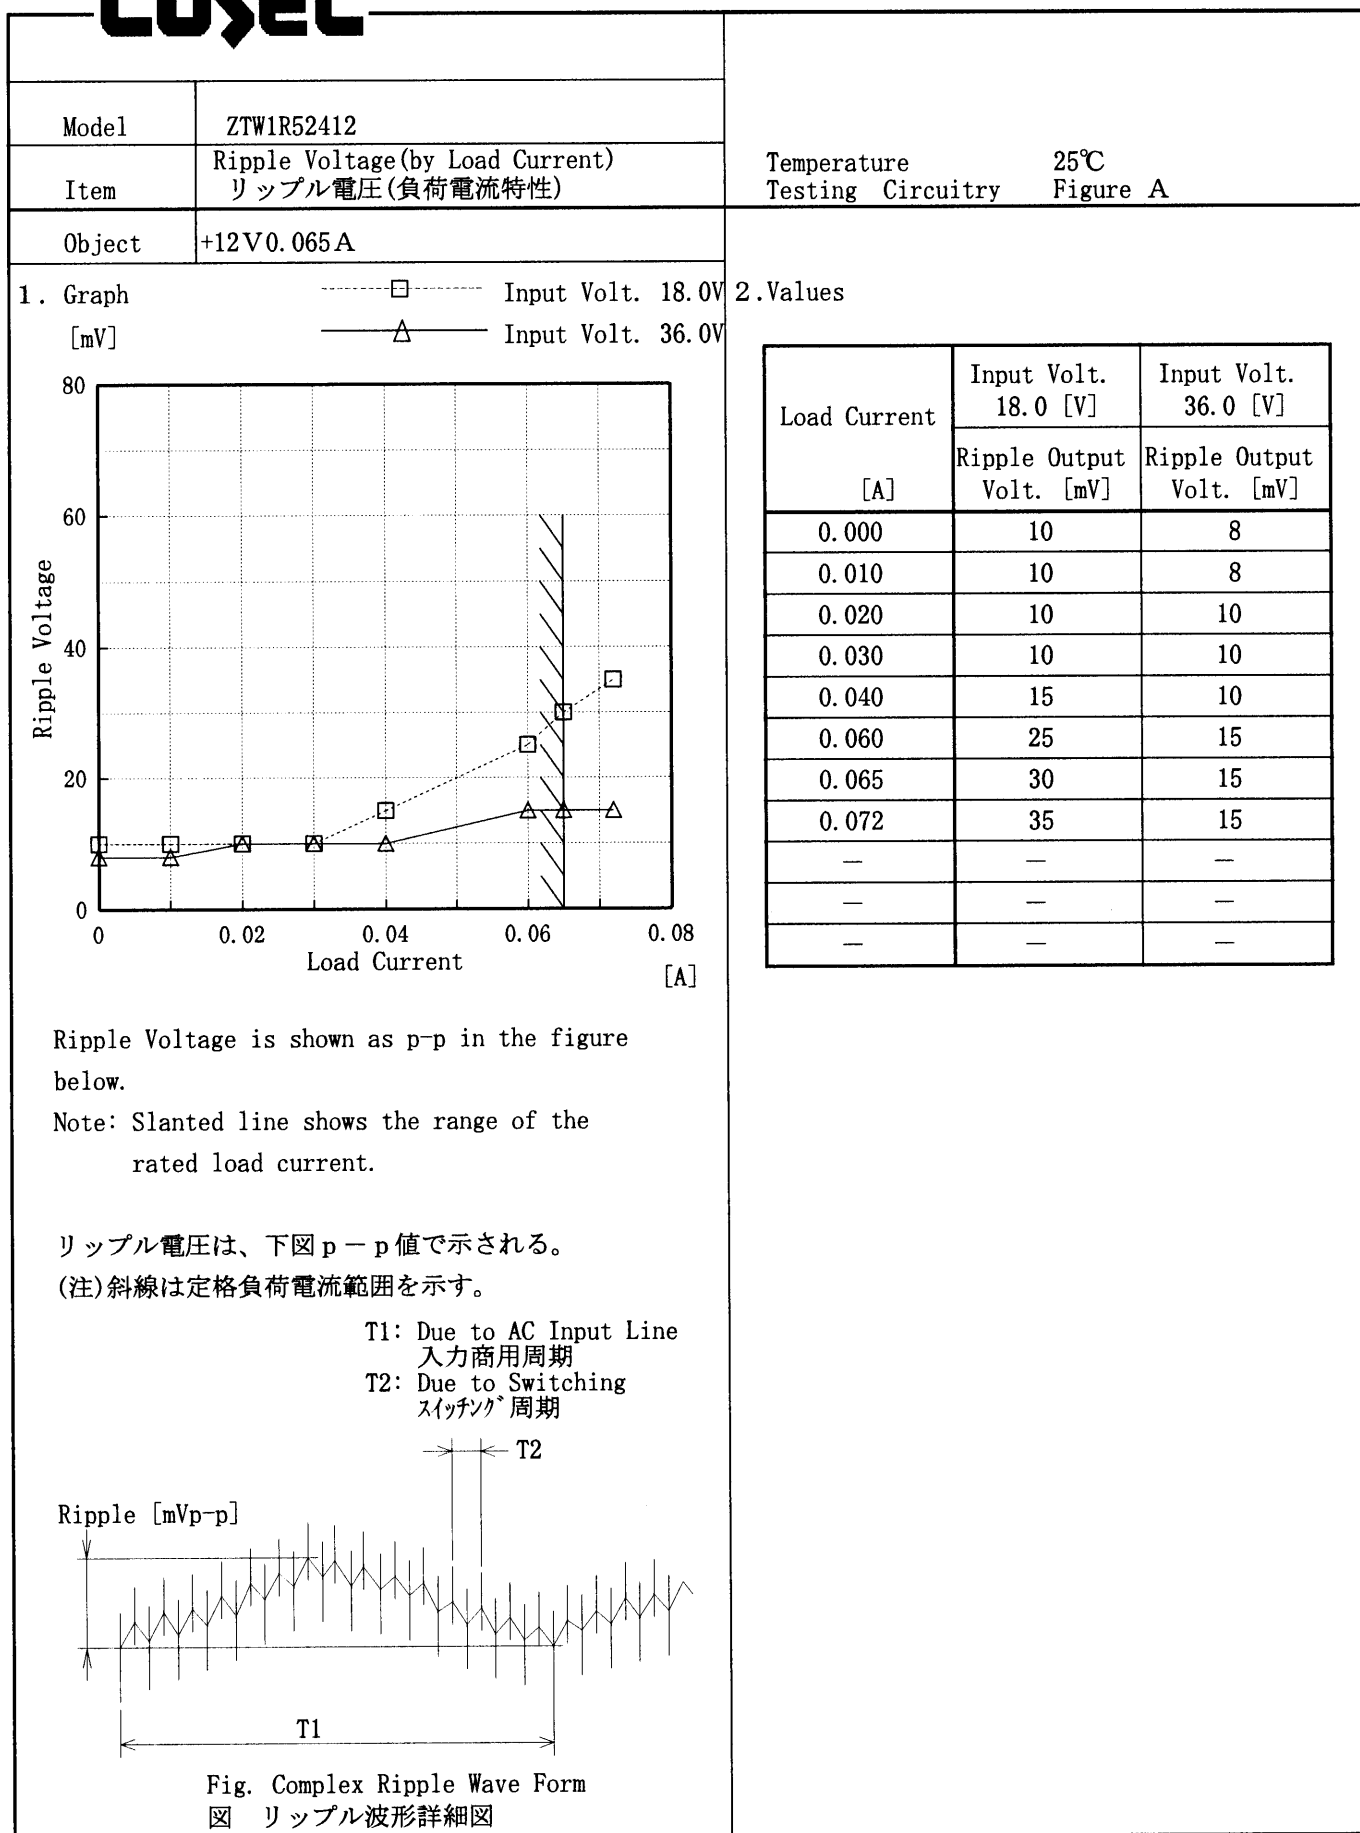

COSEL

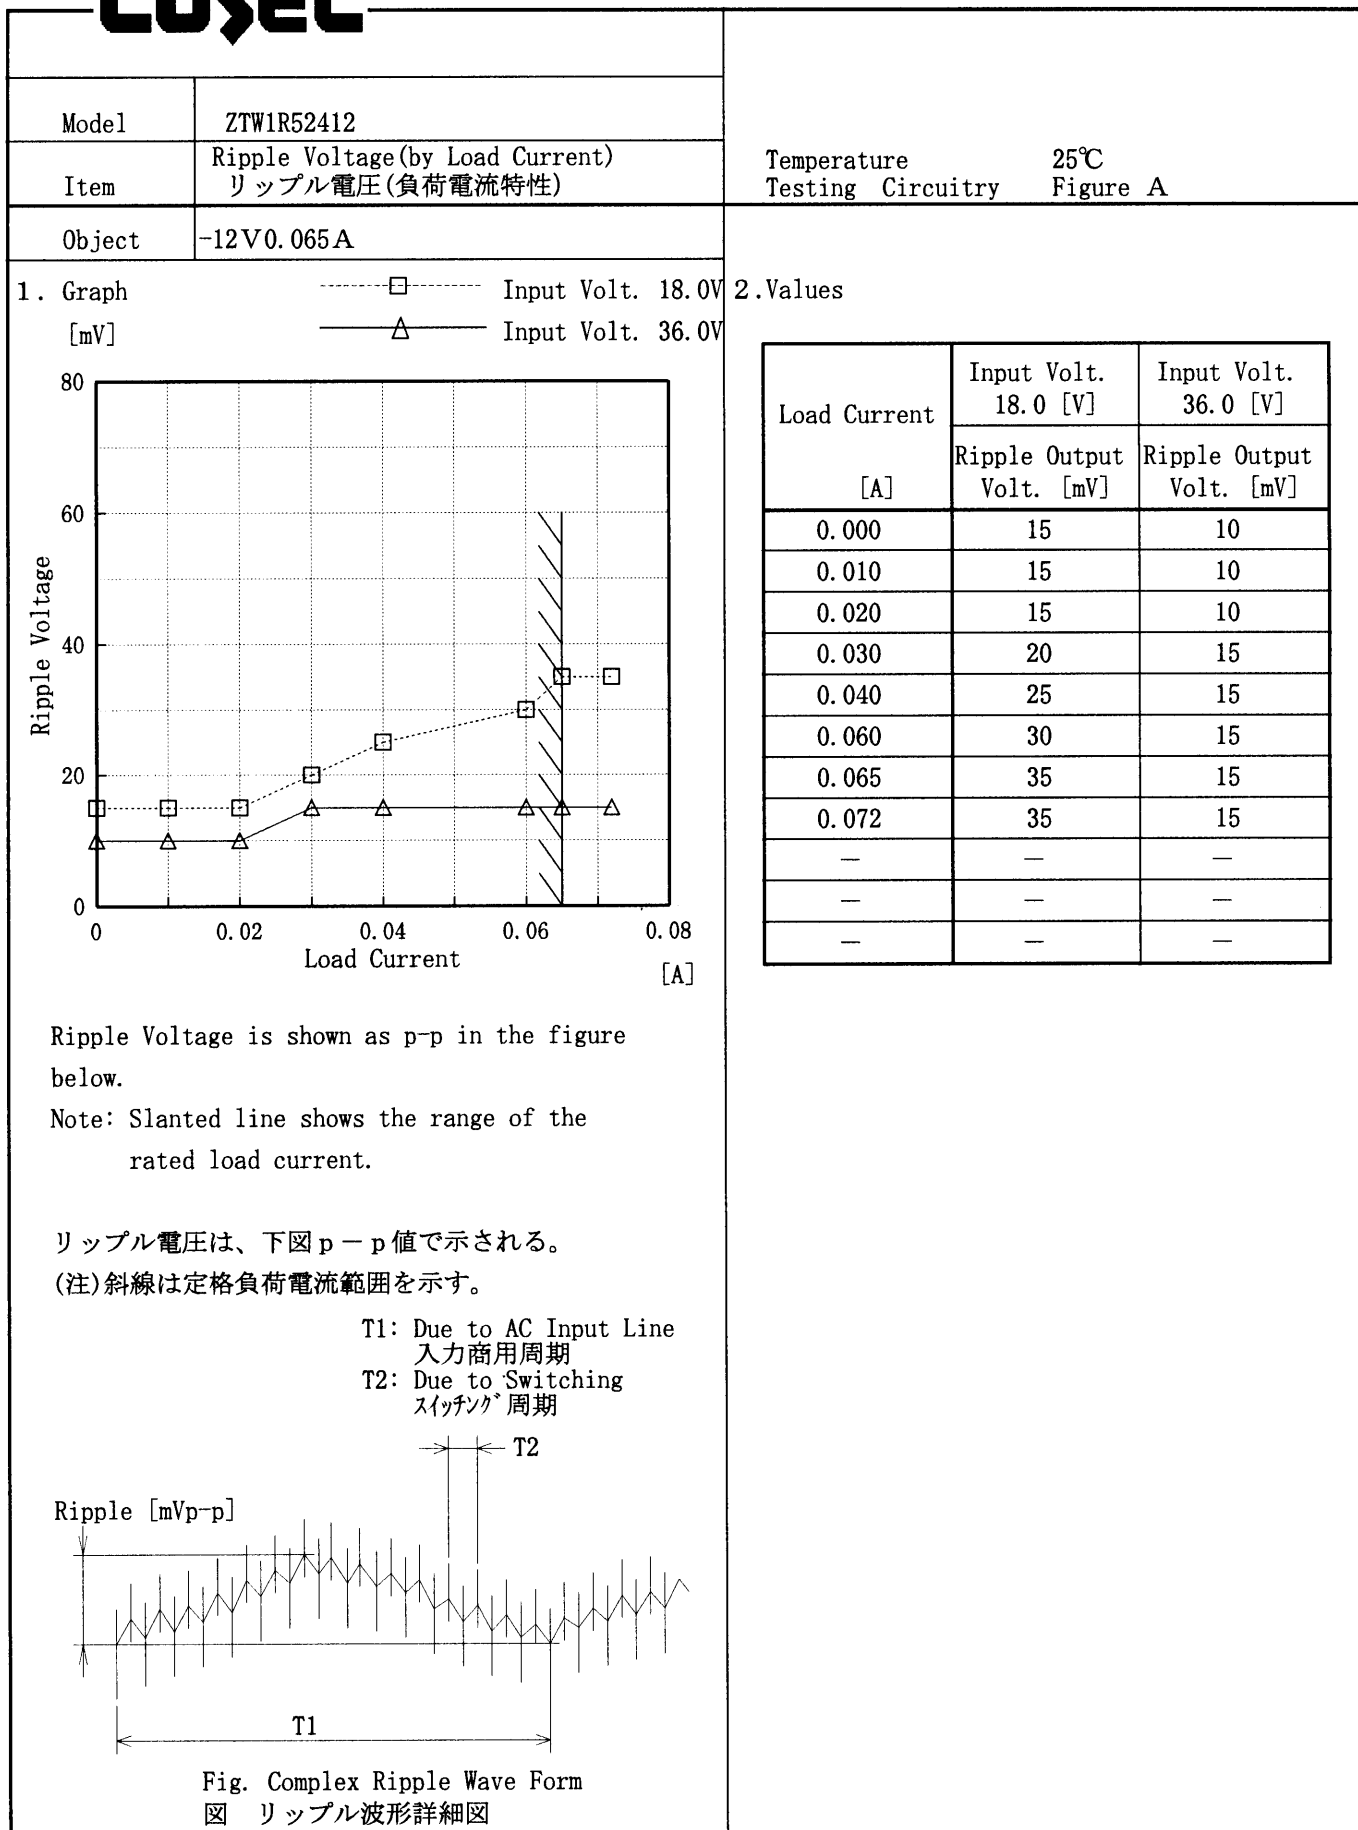



COSEL

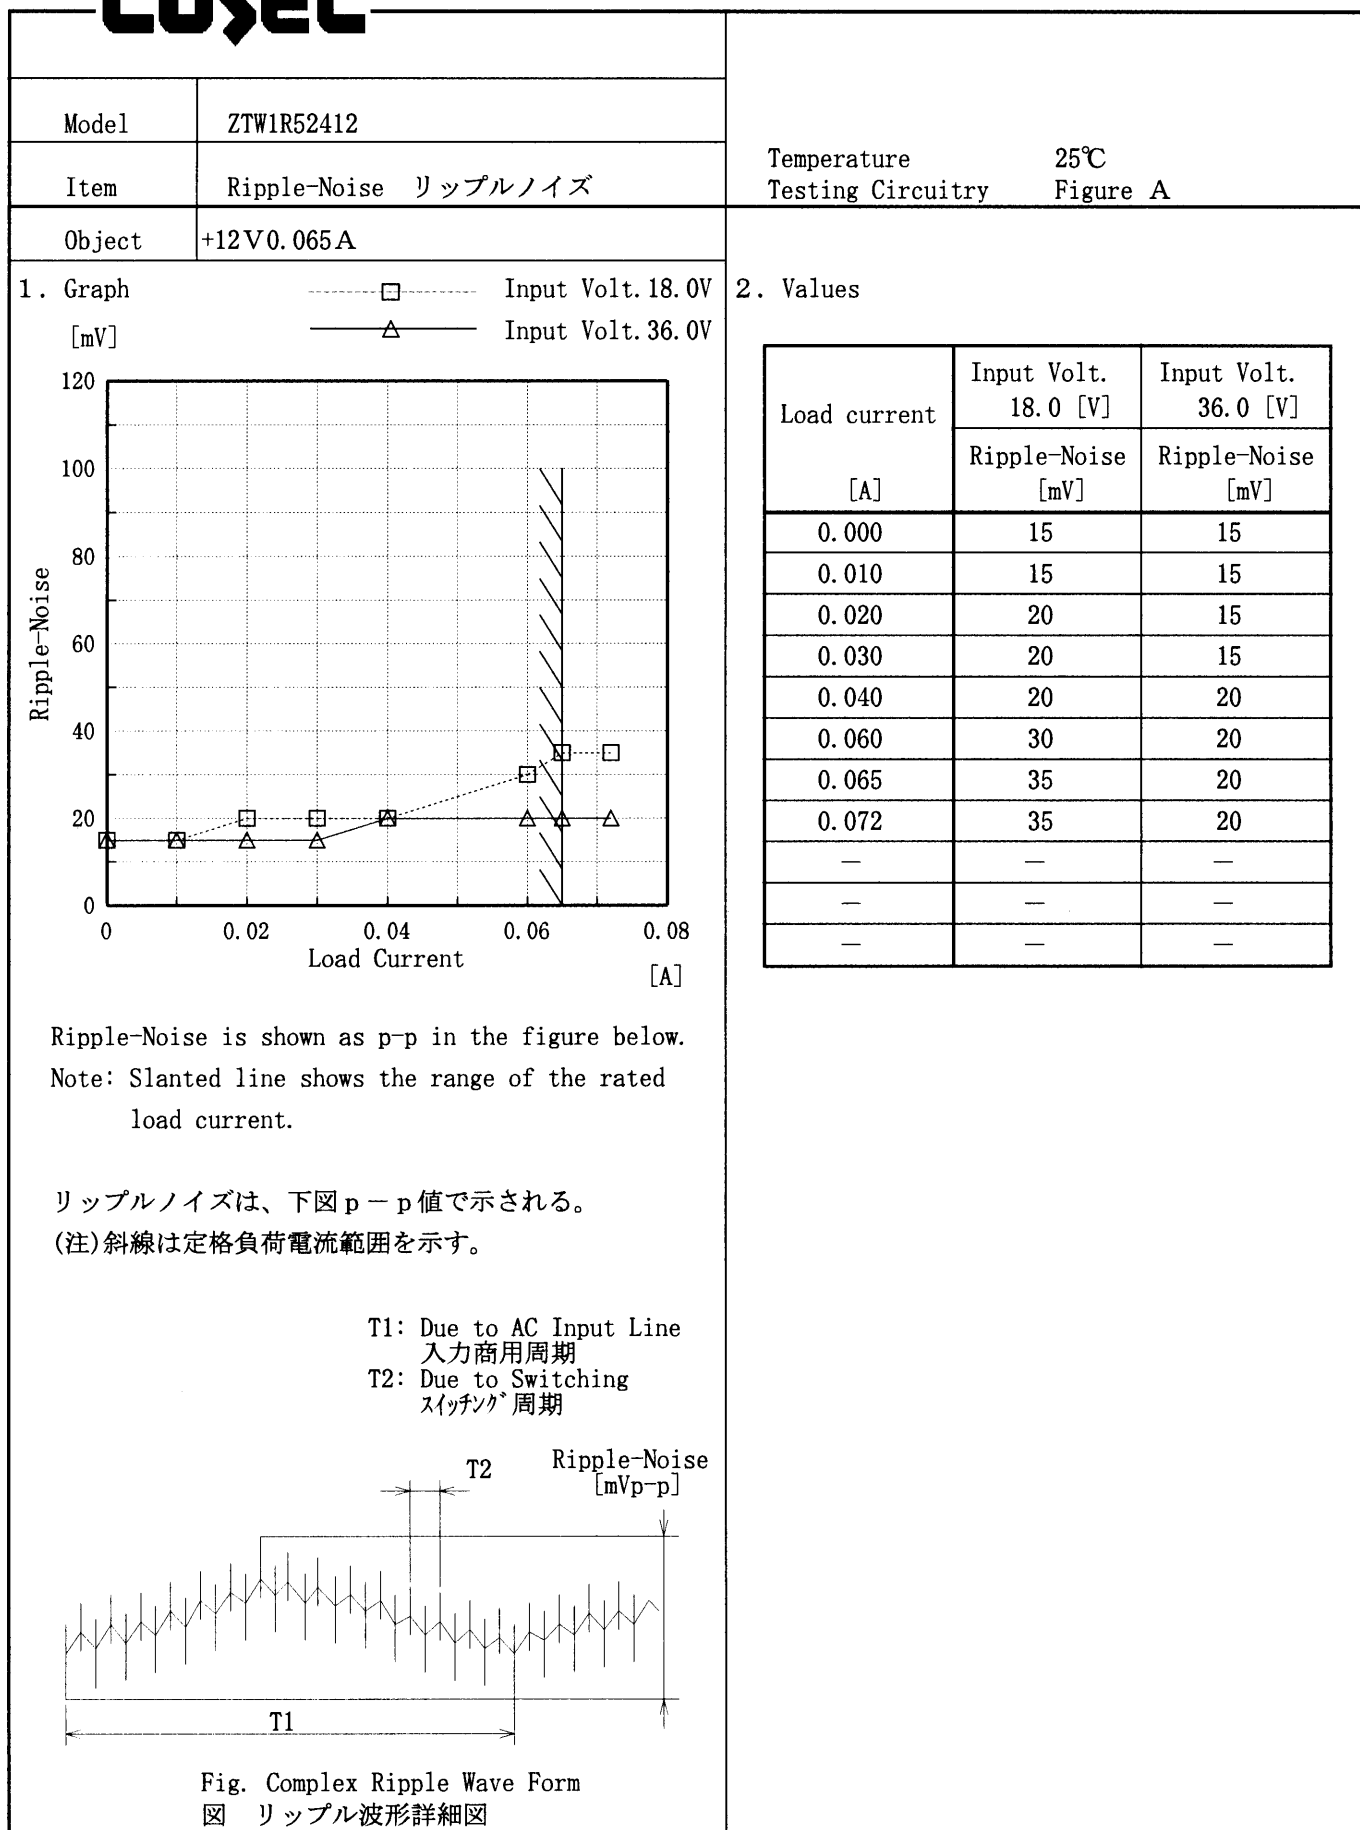

COSEL

Model	ZTW1R52412	Temperature	25℃																																				
Item	Ripple-Noise リップルノイズ	Testing Circuitry	Figure A																																				
Object	-12V0.065A																																						
1. Graph		2. Values																																					
<div><div>-----□----- Input Volt. 18.0V</div><div>-----△----- Input Volt. 36.0V</div></div> <div><div><div>[mV]</div><div>120</div><div>100</div><div>80</div><div>60</div><div>40</div><div>20</div><div>0</div></div><div></div><div><div>Ripple-Noise</div><div>Load Current</div><div>[A]</div></div></div> <table><tr><th rowspan="2">Load current [A]</th><th>Input Volt. 18.0 [V]</th><th>Input Volt. 36.0 [V]</th></tr><tr><th>Ripple-Noise [mV]</th><th>Ripple-Noise [mV]</th></tr><tr><td>0.000</td><td>20</td><td>15</td></tr><tr><td>0.010</td><td>20</td><td>15</td></tr><tr><td>0.020</td><td>20</td><td>15</td></tr><tr><td>0.030</td><td>25</td><td>20</td></tr><tr><td>0.040</td><td>25</td><td>20</td></tr><tr><td>0.060</td><td>30</td><td>20</td></tr><tr><td>0.065</td><td>35</td><td>20</td></tr><tr><td>0.072</td><td>35</td><td>20</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table> <div><div>Ripple-Noise is shown as p-p in the figure below.</div><div>Note: Slanted line shows the range of the rated load current.</div></div> <div><div>リップルノイズは、下図 p - p 値で示される。</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div> <div><div>T1: Due to AC Input Line 入力商用周期</div><div>T2: Due to Switching スイッチング周期</div><div><div><div>T2</div><div>Ripple-Noise</div><div>[mVp-p]</div></div><div></div><div><div>T1</div></div></div></div> <div><div>Fig. Complex Ripple Wave Form</div><div>図 リップル波形詳細図</div></div>		Load current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.000	20	15	0.010	20	15	0.020	20	15	0.030	25	20	0.040	25	20	0.060	30	20	0.065	35	20	0.072	35	20	—	—	—	—	—	—	—	—	—
Load current [A]	Input Volt. 18.0 [V]		Input Volt. 36.0 [V]																																				
	Ripple-Noise [mV]	Ripple-Noise [mV]																																					
0.000	20	15																																					
0.010	20	15																																					
0.020	20	15																																					
0.030	25	20																																					
0.040	25	20																																					
0.060	30	20																																					
0.065	35	20																																					
0.072	35	20																																					
—	—	—																																					
—	—	—																																					
—	—	—																																					

COSEL

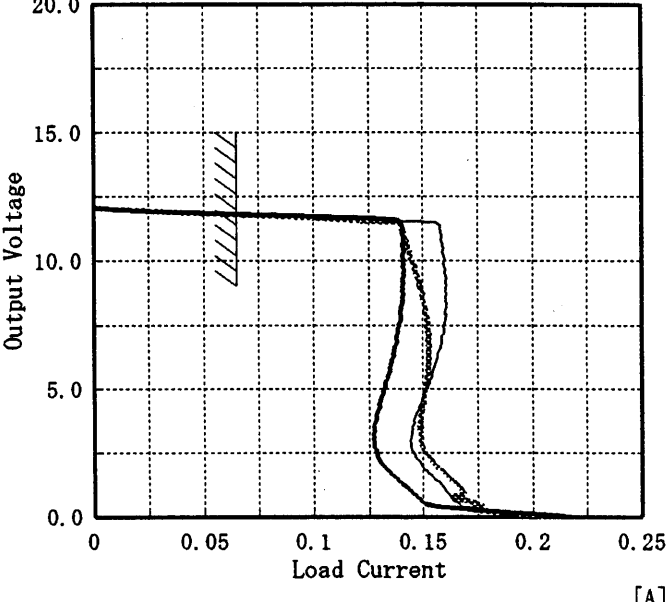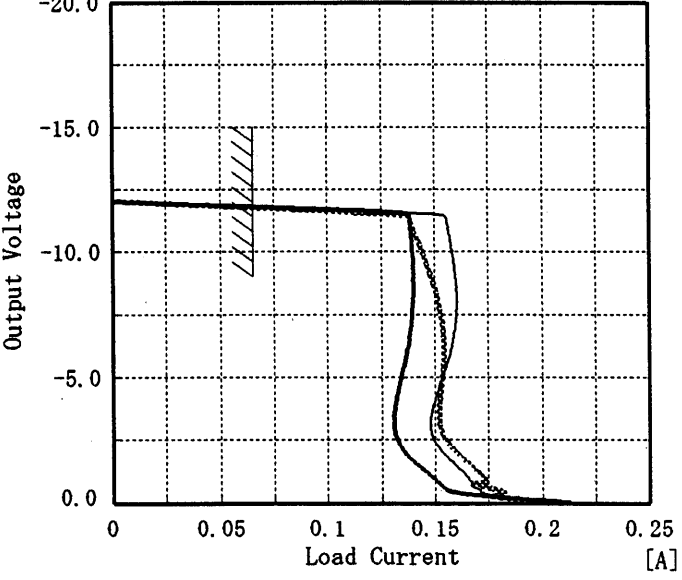Model ZTW1R52412		Temperature 25°C																																																					
Item Overcurrent Protection 過電流保護		Testing Circuitry Figure A																																																					
Object +12V0.065A																																																							
1. Graph [V] 		2. Values <table border="1"> <thead> <tr> <th>Output Voltage [V]</th><th>Input Volt. 18.0[V] Load Current [A]</th><th>Input Volt. 24.0[V] Load Current [A]</th><th>Input Volt. 36.0[V] Load Current [A]</th></tr> </thead> <tbody> <tr><td>12.00</td><td>0.088</td><td>0.096</td><td>0.102</td></tr> <tr><td>11.40</td><td>0.140</td><td>0.158</td><td>0.140</td></tr> <tr><td>10.80</td><td>0.142</td><td>0.158</td><td>0.141</td></tr> <tr><td>9.60</td><td>0.146</td><td>0.160</td><td>0.141</td></tr> <tr><td>8.40</td><td>0.150</td><td>0.160</td><td>0.141</td></tr> <tr><td>7.20</td><td>0.152</td><td>0.159</td><td>0.138</td></tr> <tr><td>6.00</td><td>0.152</td><td>0.156</td><td>0.135</td></tr> <tr><td>4.80</td><td>0.150</td><td>0.151</td><td>0.132</td></tr> <tr><td>3.60</td><td>0.148</td><td>0.146</td><td>0.128</td></tr> <tr><td>2.40</td><td>0.151</td><td>0.146</td><td>0.129</td></tr> <tr><td>1.20</td><td>0.165</td><td>0.158</td><td>0.141</td></tr> <tr><td>0.00</td><td>0.205</td><td>0.220</td><td>0.215</td></tr> </tbody> </table>		Output Voltage [V]	Input Volt. 18.0[V] Load Current [A]	Input Volt. 24.0[V] Load Current [A]	Input Volt. 36.0[V] Load Current [A]	12.00	0.088	0.096	0.102	11.40	0.140	0.158	0.140	10.80	0.142	0.158	0.141	9.60	0.146	0.160	0.141	8.40	0.150	0.160	0.141	7.20	0.152	0.159	0.138	6.00	0.152	0.156	0.135	4.80	0.150	0.151	0.132	3.60	0.148	0.146	0.128	2.40	0.151	0.146	0.129	1.20	0.165	0.158	0.141	0.00	0.205	0.220	0.215
Output Voltage [V]	Input Volt. 18.0[V] Load Current [A]	Input Volt. 24.0[V] Load Current [A]	Input Volt. 36.0[V] Load Current [A]																																																				
12.00	0.088	0.096	0.102																																																				
11.40	0.140	0.158	0.140																																																				
10.80	0.142	0.158	0.141																																																				
9.60	0.146	0.160	0.141																																																				
8.40	0.150	0.160	0.141																																																				
7.20	0.152	0.159	0.138																																																				
6.00	0.152	0.156	0.135																																																				
4.80	0.150	0.151	0.132																																																				
3.60	0.148	0.146	0.128																																																				
2.40	0.151	0.146	0.129																																																				
1.20	0.165	0.158	0.141																																																				
0.00	0.205	0.220	0.215																																																				
Object -12V0.065A																																																							
1. Graph [V] 		2. Values <table border="1"> <thead> <tr> <th>Output Voltage [V]</th><th>Input Volt. 18.0[V] Load Current [A]</th><th>Input Volt. 24.0[V] Load Current [A]</th><th>Input Volt. 36.0[V] Load Current [A]</th></tr> </thead> <tbody> <tr><td>-12.00</td><td>0.102</td><td>0.114</td><td>0.123</td></tr> <tr><td>-11.40</td><td>0.138</td><td>0.155</td><td>0.138</td></tr> <tr><td>-10.80</td><td>0.140</td><td>0.156</td><td>0.139</td></tr> <tr><td>-9.60</td><td>0.145</td><td>0.159</td><td>0.140</td></tr> <tr><td>-8.40</td><td>0.150</td><td>0.160</td><td>0.140</td></tr> <tr><td>-7.20</td><td>0.153</td><td>0.160</td><td>0.139</td></tr> <tr><td>-6.00</td><td>0.154</td><td>0.157</td><td>0.137</td></tr> <tr><td>-4.80</td><td>0.153</td><td>0.153</td><td>0.134</td></tr> <tr><td>-3.60</td><td>0.152</td><td>0.149</td><td>0.131</td></tr> <tr><td>-2.40</td><td>0.155</td><td>0.150</td><td>0.133</td></tr> <tr><td>-1.20</td><td>0.170</td><td>0.162</td><td>0.145</td></tr> <tr><td>0.00</td><td>0.199</td><td>0.213</td><td>0.207</td></tr> </tbody> </table>		Output Voltage [V]	Input Volt. 18.0[V] Load Current [A]	Input Volt. 24.0[V] Load Current [A]	Input Volt. 36.0[V] Load Current [A]	-12.00	0.102	0.114	0.123	-11.40	0.138	0.155	0.138	-10.80	0.140	0.156	0.139	-9.60	0.145	0.159	0.140	-8.40	0.150	0.160	0.140	-7.20	0.153	0.160	0.139	-6.00	0.154	0.157	0.137	-4.80	0.153	0.153	0.134	-3.60	0.152	0.149	0.131	-2.40	0.155	0.150	0.133	-1.20	0.170	0.162	0.145	0.00	0.199	0.213	0.207
Output Voltage [V]	Input Volt. 18.0[V] Load Current [A]	Input Volt. 24.0[V] Load Current [A]	Input Volt. 36.0[V] Load Current [A]																																																				
-12.00	0.102	0.114	0.123																																																				
-11.40	0.138	0.155	0.138																																																				
-10.80	0.140	0.156	0.139																																																				
-9.60	0.145	0.159	0.140																																																				
-8.40	0.150	0.160	0.140																																																				
-7.20	0.153	0.160	0.139																																																				
-6.00	0.154	0.157	0.137																																																				
-4.80	0.153	0.153	0.134																																																				
-3.60	0.152	0.149	0.131																																																				
-2.40	0.155	0.150	0.133																																																				
-1.20	0.170	0.162	0.145																																																				
0.00	0.199	0.213	0.207																																																				
Note: Slanted line shows the range of the rated load current. (注) 斜線は定格負荷電流範囲を示す。																																																							

COSEL

Model	ZTW1R52412	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Response 動的負荷変動	
Object	+12V0.065A	



Input Volt. 24.0 V

Cycle 100 mS

Load Current



Min. Load ↔
Load 100 %

200 mV/div

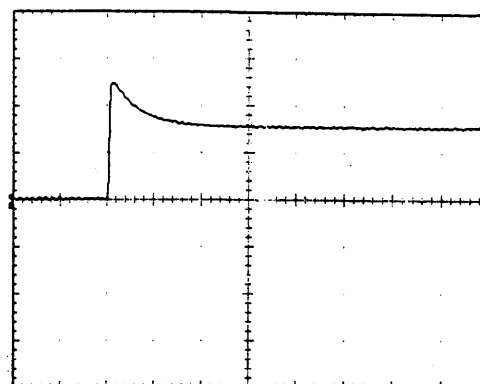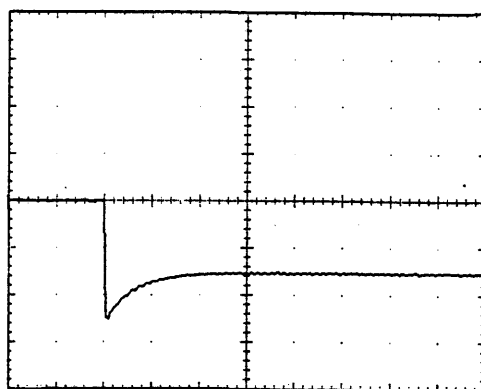



Min. Load ↔
Load 50 %

200 mV/div

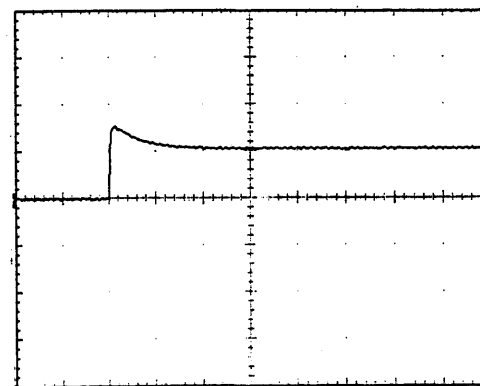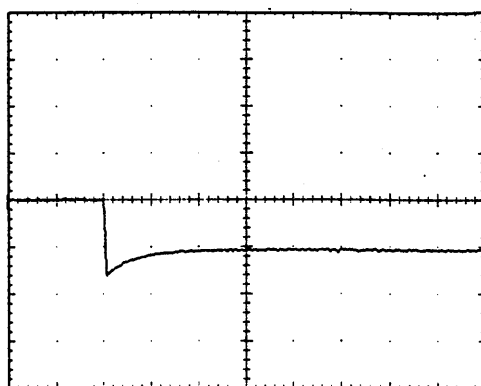

Load 50% ↔
Load 100 %

200 mV/div

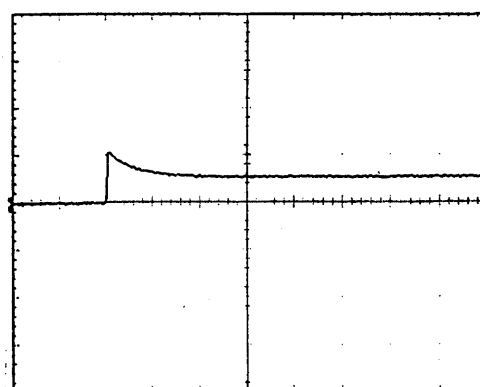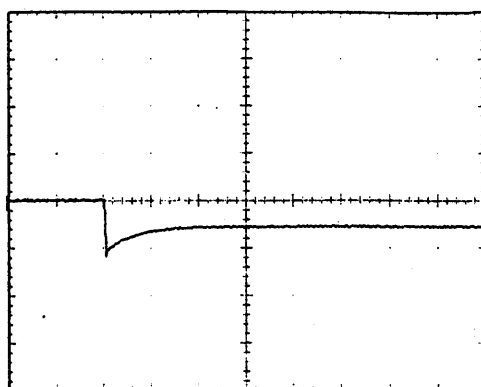

1 mS/div

COSEL

Model	ZTW1R52412	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	-12V0.065A	

Input Volt. 24.0 V



Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %



200 mV/div

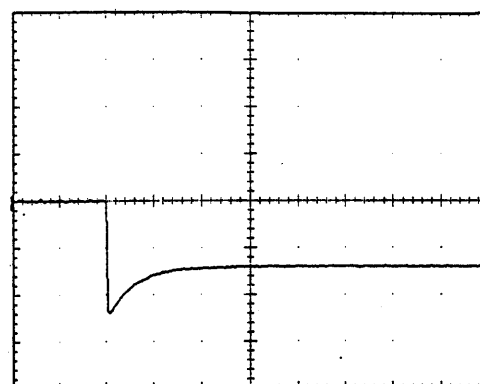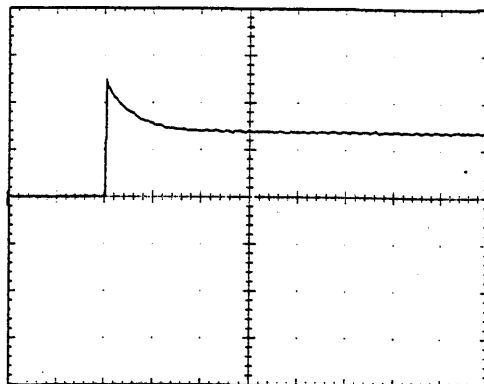

Min. Load ↔

Load 50 %



200 mV/div

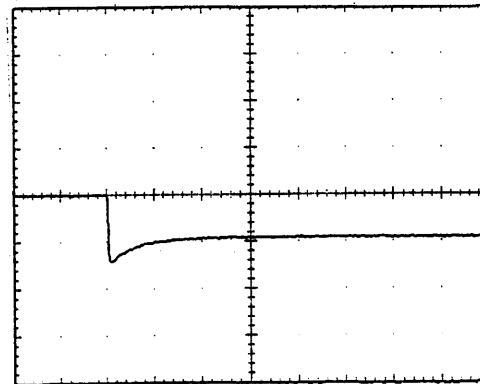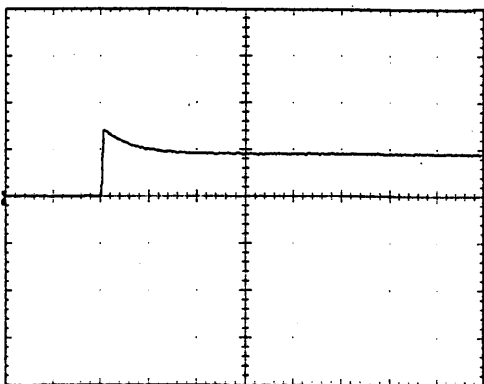

Load 50% ↔

Load 100 %

200 mV/div

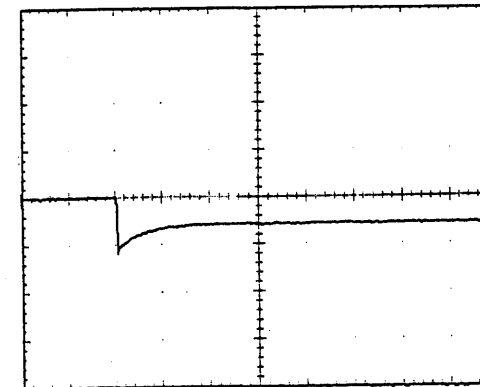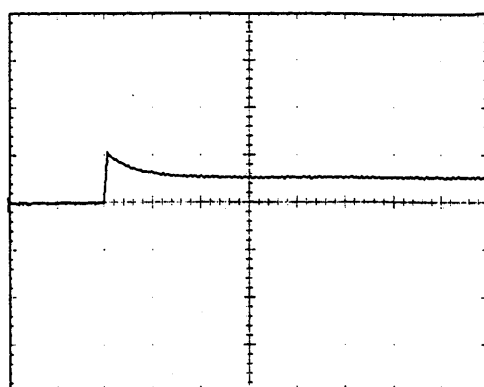


1 mS/div

COSEL

Model	ZTW1R52412	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12V0.065A		

1. Graph


Input Volt. 18.0 V

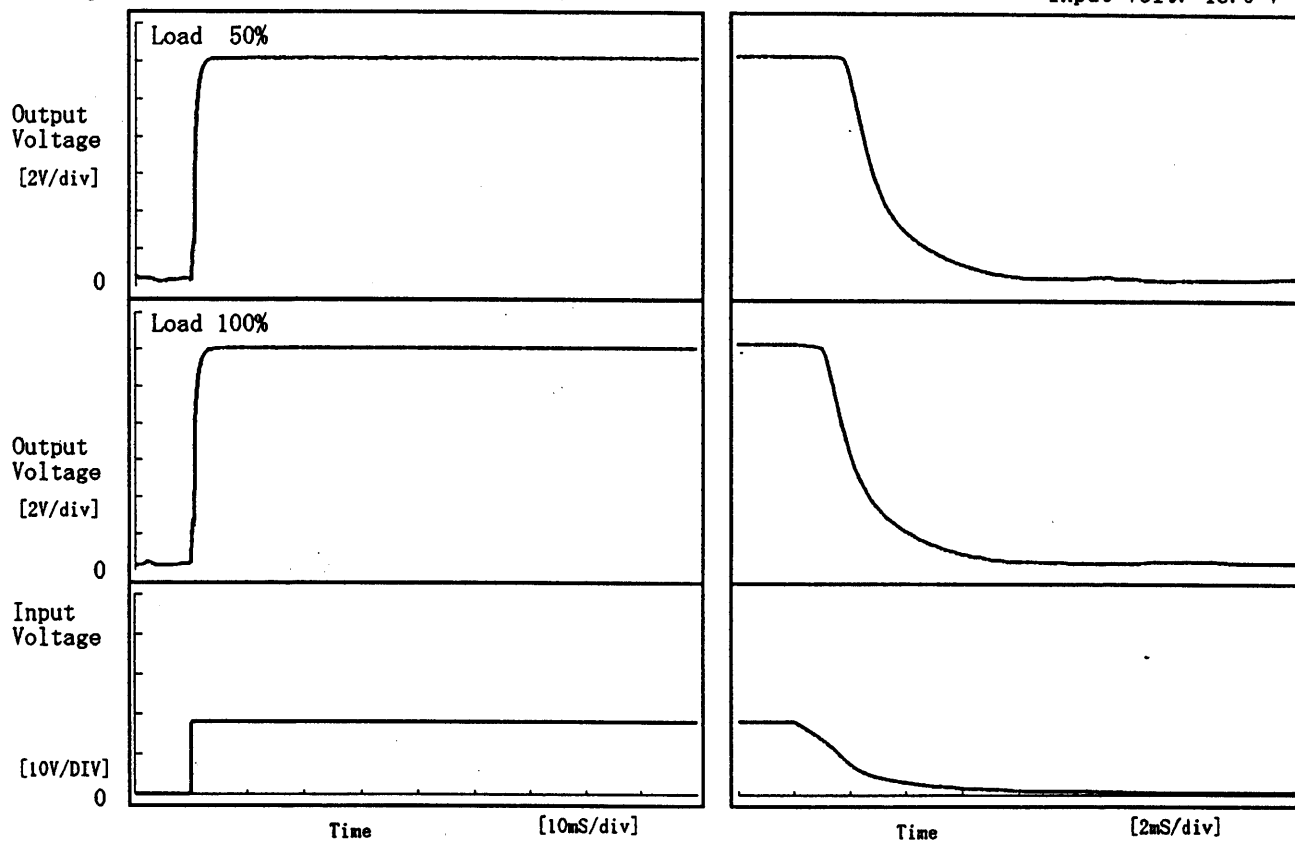

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.05	1.50	1.55	2.03	3.67
100 %	0.05	1.60	1.65	1.25	3.70

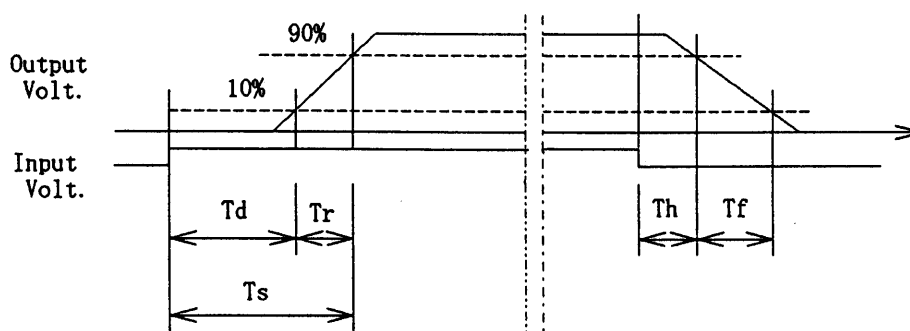

COSEL

Model ZTW1R52412


Item Rise and Fall Time 立上り、立下り時間

Temperature 25°C
Testing Circuitry Figure A

Object -12V0.065A

1. Graph


Input Volt. 18.0 V

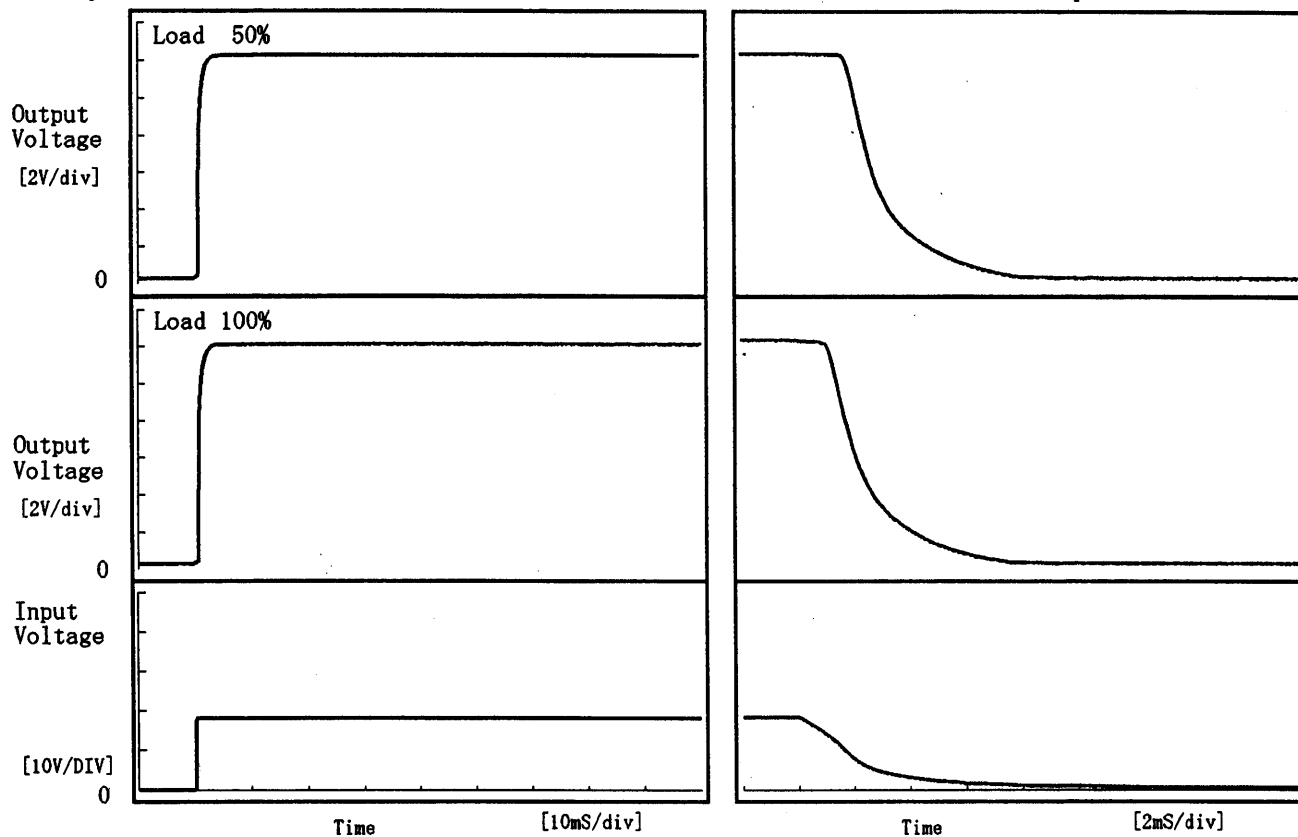

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.55	0.95	1.50	1.89	3.52
100 %	0.55	1.00	1.55	1.25	3.60

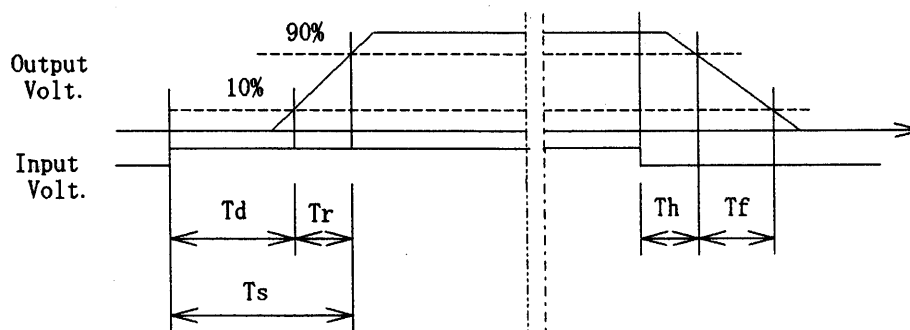

COSEL

Model		ZTW1R52412																																																					
Item		Ambient Temperature Drift 周囲温度変動																																																					
Object		+12V0.065A																																																					
1. Graph		2. Values																																																					
<div><div>—△— Input Volt. 18.0V - -□- - Input Volt. 24.0V —○— Input Volt. 36.0V</div><p>Output Voltage [V]</p><p>Ambient Temperature [°C]</p><p>Load 100%</p></div>		<table><tr><th>Temperature</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr><tr><th>[°C]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>-30</td><td>11.828</td><td>11.831</td><td>11.830</td></tr><tr><td>-20</td><td>11.827</td><td>11.830</td><td>11.829</td></tr><tr><td>-10</td><td>11.826</td><td>11.830</td><td>11.828</td></tr><tr><td>0</td><td>11.826</td><td>11.829</td><td>11.828</td></tr><tr><td>10</td><td>11.826</td><td>11.830</td><td>11.828</td></tr><tr><td>25</td><td>11.827</td><td>11.831</td><td>11.829</td></tr><tr><td>30</td><td>11.827</td><td>11.831</td><td>11.830</td></tr><tr><td>40</td><td>11.828</td><td>11.832</td><td>11.831</td></tr><tr><td>55</td><td>11.828</td><td>11.832</td><td>11.832</td></tr><tr><td>60</td><td>11.828</td><td>11.833</td><td>11.832</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Temperature	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-30	11.828	11.831	11.830	-20	11.827	11.830	11.829	-10	11.826	11.830	11.828	0	11.826	11.829	11.828	10	11.826	11.830	11.828	25	11.827	11.831	11.829	30	11.827	11.831	11.830	40	11.828	11.832	11.831	55	11.828	11.832	11.832	60	11.828	11.833	11.832	—	—	—	—
Temperature	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																				
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																				
-30	11.828	11.831	11.830																																																				
-20	11.827	11.830	11.829																																																				
-10	11.826	11.830	11.828																																																				
0	11.826	11.829	11.828																																																				
10	11.826	11.830	11.828																																																				
25	11.827	11.831	11.829																																																				
30	11.827	11.831	11.830																																																				
40	11.828	11.832	11.831																																																				
55	11.828	11.832	11.832																																																				
60	11.828	11.833	11.832																																																				
—	—	—	—																																																				
Object		-12V0.065A																																																					
1. Graph		2. Values																																																					
<div><div>—△— Input Volt. 18.0V - -□- - Input Volt. 24.0V —○— Input Volt. 36.0V</div><p>Output Voltage [V]</p><p>Ambient Temperature [°C]</p><p>Load 100%</p></div>		<table><tr><th>Temperature</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr><tr><th>[°C]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>-30</td><td>-11.799</td><td>-11.802</td><td>-11.800</td></tr><tr><td>-20</td><td>-11.799</td><td>-11.801</td><td>-11.800</td></tr><tr><td>-10</td><td>-11.798</td><td>-11.801</td><td>-11.799</td></tr><tr><td>0</td><td>-11.798</td><td>-11.800</td><td>-11.799</td></tr><tr><td>10</td><td>-11.797</td><td>-11.800</td><td>-11.799</td></tr><tr><td>25</td><td>-11.797</td><td>-11.801</td><td>-11.799</td></tr><tr><td>30</td><td>-11.797</td><td>-11.801</td><td>-11.799</td></tr><tr><td>40</td><td>-11.797</td><td>-11.801</td><td>-11.799</td></tr><tr><td>55</td><td>-11.797</td><td>-11.801</td><td>-11.800</td></tr><tr><td>60</td><td>-11.797</td><td>-11.801</td><td>-11.801</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Temperature	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-30	-11.799	-11.802	-11.800	-20	-11.799	-11.801	-11.800	-10	-11.798	-11.801	-11.799	0	-11.798	-11.800	-11.799	10	-11.797	-11.800	-11.799	25	-11.797	-11.801	-11.799	30	-11.797	-11.801	-11.799	40	-11.797	-11.801	-11.799	55	-11.797	-11.801	-11.800	60	-11.797	-11.801	-11.801	—	—	—	—
Temperature	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																				
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																				
-30	-11.799	-11.802	-11.800																																																				
-20	-11.799	-11.801	-11.800																																																				
-10	-11.798	-11.801	-11.799																																																				
0	-11.798	-11.800	-11.799																																																				
10	-11.797	-11.800	-11.799																																																				
25	-11.797	-11.801	-11.799																																																				
30	-11.797	-11.801	-11.799																																																				
40	-11.797	-11.801	-11.799																																																				
55	-11.797	-11.801	-11.800																																																				
60	-11.797	-11.801	-11.801																																																				
—	—	—	—																																																				
Note: Slanted line shows the range of the rated ambient temperature.																																																							
(注) 斜線は定格周囲温度範囲を示す。																																																							


COSEL

Model ZTW1R52412

Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object +12V0.065A

1. Graph

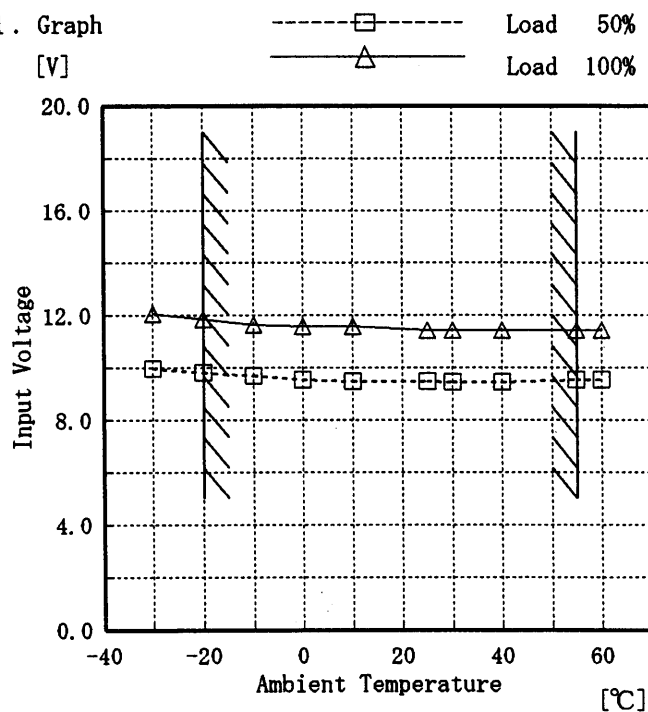


Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-30	10.0	12.1
-20	9.8	11.9
-10	9.7	11.7
0	9.6	11.6
10	9.5	11.6
25	9.5	11.4
30	9.5	11.4
40	9.5	11.4
55	9.6	11.4
60	9.6	11.4
—	—	—

Object -12V0.065A

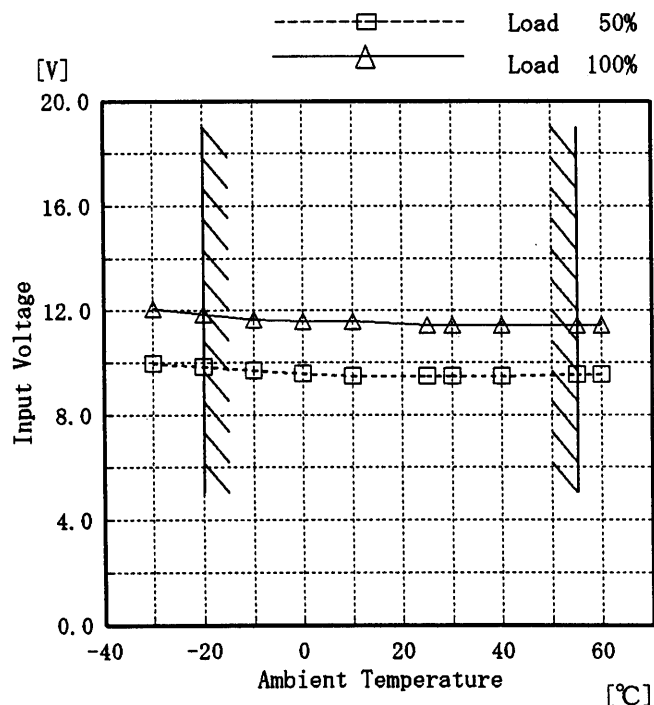

2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-30	10.0	12.1
-20	9.8	11.9
-10	9.7	11.7
0	9.6	11.6
10	9.5	11.6
25	9.5	11.4
30	9.5	11.4
40	9.5	11.4
55	9.6	11.4
60	9.6	11.4
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

COSEL

Model		ZTW1R52412
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)	
Object	+12V0.065A	
1. Graph		
	-----□-----	Load 50%
	-----△-----	Load 100%
[mV]		
100		
80		
60		
40		
20		
0		
-40		
-20		
0		
20		
40		
60		
Ripple Voltage		
Ambient Temperature		[°C]
Input Volt. 18.0 V		

2. Values		
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-30	20	40
-20	20	40
-10	15	40
0	15	35
10	15	35
25	15	30
30	15	30
40	15	25
55	10	25
60	10	25
—	—	—

Object		-12V0.065A
1. Graph		
	-----□-----	Load 50%
	-----△-----	Load 100%
100		
80		
60		
40		
20		
0		
-40		
-20		
0		
20		
40		
60		
Ripple Voltage		
Ambient Temperature		[°C]
Input Volt. 18.0 V		

2. Values		
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-30	20	45
-20	20	45
-10	15	45
0	15	45
10	15	35
25	15	35
30	15	35
40	15	25
55	10	20
60	10	20
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

COSEL


Model ZTW1R52412

Item Time Lapse Drift 経時ドリフト

Object +12V0.065A

Temperature 25 ℃
Testing Circuitry Figure A

1. Graph

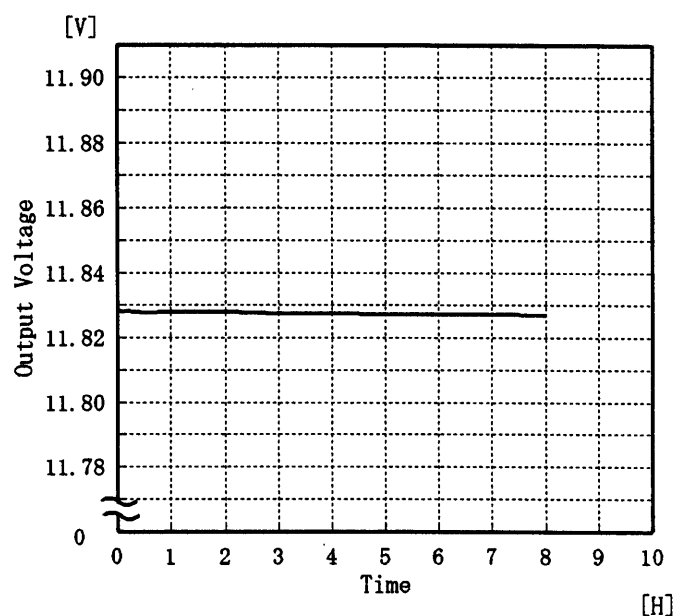


2. Values

Time since start [H]	Output Voltage [V]
0.0	11.829
0.5	11.828
1.0	11.828
2.0	11.828
3.0	11.828
4.0	11.828
5.0	11.827
6.0	11.827
7.0	11.827
8.0	11.827

Object -12V0.065A

1. Graph

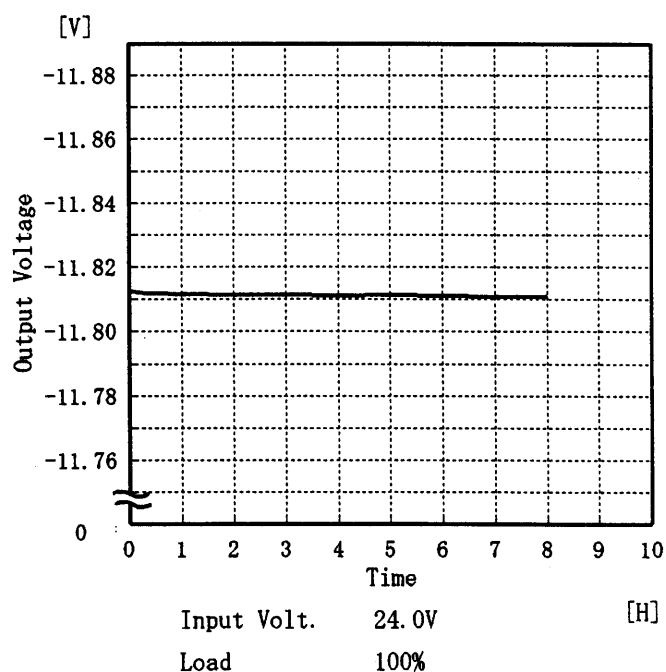

2. Values

Time since start [H]	Output Voltage [V]
0.0	-11.813
0.5	-11.812
1.0	-11.812
2.0	-11.812
3.0	-11.812
4.0	-11.811
5.0	-11.812
6.0	-11.811
7.0	-11.811
8.0	-11.811

COSEL

Model		ZTW1R52412	Testing Circuitry	Figure A
Item		Condensation 結露特性		
Object		+12V0.065A		
1. Condensation test				
Testing procedure is as follows.				
① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.				
② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.				
③ Testing electrical characteristics of the unit to confirm there be no fault.				
1. 結露特性試験				
入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。				
2. Values				
Item		Data	Testing Conditions	
Output Voltage [V]		11.983	Input Volt.: 24V, Load Current:0.065A	
Line Regulation [mV]		3	Input Volt.: 18~36V, Load Current:0.065A	
Load Regulation [mV]		204	Input Volt.: 24V, Load Current:0~0.065A	

-18-

BC-3122

COSEL

LOREL

		Testing Circuitry Figure A
Model	ZTW1R52412	
Item	Condensation 結露特性	
Object	−12V0.065A	

1. Condensation test

Testing procedure is as follows.

① Keeping and cooling the unit in a tank at −10℃ for an hour with the input off.

② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.

③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で−10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	−11.930	Input Volt.: 24V, Load Current:0.065A
Line Regulation [mV]	5	Input Volt.: 18~36V, Load Current:0.065A
Load Regulation [mV]	268	Input Volt.: 24V, Load Current:0~0.065A

COSEL

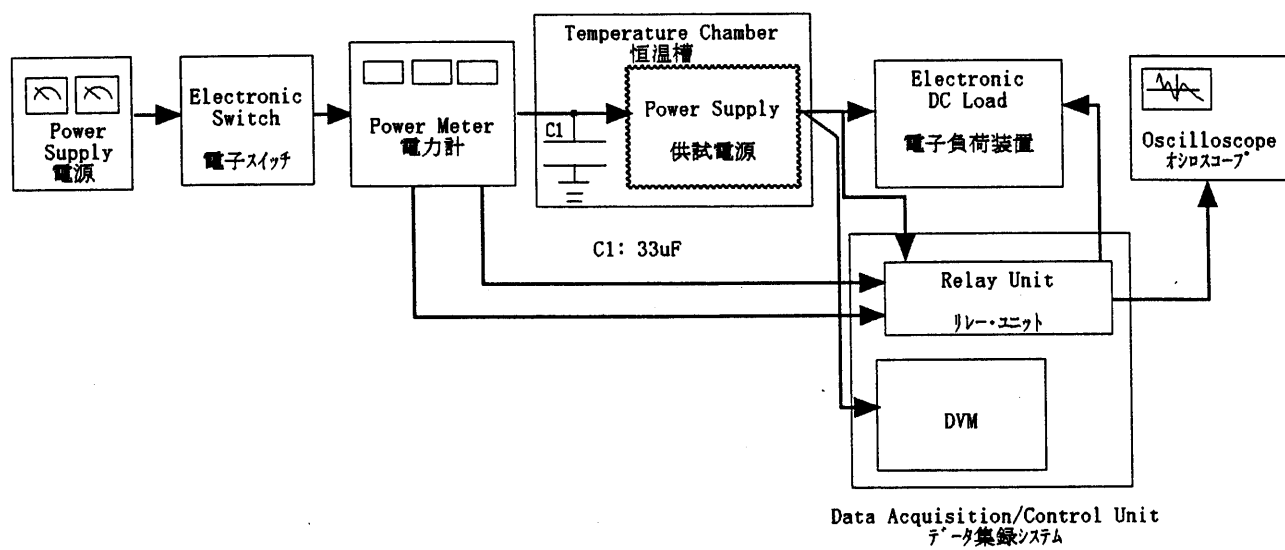


Figure A