

Apr.13,2007

Temperature increase of main components: 主要部品温度上昇

Cosel.co.,ltd.


Model: ZUS1048/ZUW1048

1. Conditions

- (1) Input :DC 36 ~ 72 [V]
 (2) Output :Rated output
 (3) Mounting method :Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)					Rated temp. [°C]	Reference
			[deg]						
			5V	12V	15V	±12V	±15V		
1	Transformer	T11	62	62	62	62	60	130	
2	Switching Transistor	TR23	49	50	48	51	50	150	Junction Temp.
3	Rectified Diode(Output)	D51	63	54	48	45	54	150	Junction Temp.
4	Power Control Ic	IC11	54	52	49	55	53	150	Junction Temp.
5	Photocoupler	PC11	46	46	47	48	48	125	Junction Temp.
6	Output Choke	L51	51	42	41	44	44	120	
7	Output Capacitor	C55	45	41	40	—	—	125	
8	Output Capacitor	C55,C56	—	—	—	43	41	125	
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									

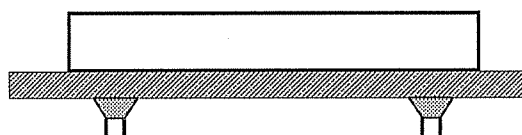

(Side view)

Fig.1.1 Mounting method
(Normal position)