



# TEST DATA OF ZUS100515

(5.0V INPUT)

Regulated DC Power Supply

Date : Sep 21. 1996

Approved by : T. Sugimori  
Design Manager

Prepared by : M. Takashima  
Design Engineer

コーセル株式会社  
COSEL CO., LTD.

CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Efficiency . . . . .	2
効率	
3. Load Regulation . . . . .	3
静的負荷変動	
4. Ripple Voltage (by Load Current) . . . . .	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise . . . . .	5
リップルノイズ	
6. Overcurrent Protection . . . . .	6
過電流保護	
7. Dynamic Load Responce . . . . .	7
動的負荷変動	
8. Rise and Fall Time . . . . .	8
立上り、立下がり時間	
9. Ambient Temperature Drift . . . . .	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature) . . . . .	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift . . . . .	12
経時ドリフト	
13. Output Voltage Accuracy . . . . .	13
定電圧精度	
14. Condensation . . . . .	14
結露特性	
15. Figure of Testing Circuitry . . . . .	15
測定回路図	

(Final Page 15 )

**COSEL**

Model		ZUS100515	Temperature 25℃ Testing Circuitry Figure A																																								
Item		Line Regulation 静的入力変動																																									
Object		+15V0.600A																																									
1. Graph		<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div></div> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>	2. Values																																								
			<table><tr><th>Input Voltage [V]</th><th>Load 50% Output Volt. [V]</th><th>Load 100% Output Volt. [V]</th></tr><tr><td>4.0</td><td>15.028</td><td>15.028</td></tr><tr><td>4.5</td><td>15.029</td><td>15.027</td></tr><tr><td>5.0</td><td>15.029</td><td>15.027</td></tr><tr><td>6.0</td><td>15.029</td><td>15.026</td></tr><tr><td>7.0</td><td>15.029</td><td>15.026</td></tr><tr><td>8.0</td><td>15.029</td><td>15.025</td></tr><tr><td>9.0</td><td>15.029</td><td>15.024</td></tr><tr><td>9.5</td><td>15.029</td><td>15.024</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	4.0	15.028	15.028	4.5	15.029	15.027	5.0	15.029	15.027	6.0	15.029	15.026	7.0	15.029	15.026	8.0	15.029	15.025	9.0	15.029	15.024	9.5	15.029	15.024	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																									
4.0	15.028	15.028																																									
4.5	15.029	15.027																																									
5.0	15.029	15.027																																									
6.0	15.029	15.026																																									
7.0	15.029	15.026																																									
8.0	15.029	15.025																																									
9.0	15.029	15.024																																									
9.5	15.029	15.024																																									
—	—	—																																									
—	—	—																																									
—	—	—																																									
—	—	—																																									

**COSEL**

Model		ZUS100515	
Item		Efficiency 効率	
Object			

1. Graph

-----□----- Load 50%

-----△----- Load 100%

Efficiency [%]

85

75

65

55

0

0

5

7

9

11

Input Voltage [V]

0

5

7

9

11

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

Temperature	25℃
Testing Circuitry	Figure A


2. Values

Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]
4.5	76.2	74.8
5.0	76.4	76.0
6.0	76.2	77.8
7.0	75.6	78.6
8.0	75.1	78.7
9.0	75.1	78.6
9.5	75.2	78.7
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

**COSEL**

Model		ZUS100515		Temperature		25℃																																													
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																													
Object		+15V0.600A																																																	
1. Graph				2. Values																																															
<div><div><div>—△—</div><div>Input Volt. 4.5V</div></div><div><div>---□---</div><div>Input Volt. 5.0V</div></div><div><div>---○---</div><div>Input Volt. 9.0V</div></div></div> <div><div><div>Output Voltage [V]</div><div><div>15.17</div><div>15.13</div><div>15.09</div><div>15.05</div><div>15.01</div><div>14.97</div><div>14.93</div><div>0</div></div></div><div><div><div>Load Current [A]</div><div><div>0</div><div>0.2</div><div>0.4</div><div>0.6</div><div>0.8</div></div></div></div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.00</td><td>15.034</td><td>15.034</td><td>15.033</td></tr><tr><td>0.10</td><td>15.031</td><td>15.031</td><td>15.031</td></tr><tr><td>0.20</td><td>15.030</td><td>15.030</td><td>15.029</td></tr><tr><td>0.30</td><td>15.029</td><td>15.029</td><td>15.028</td></tr><tr><td>0.40</td><td>15.028</td><td>15.028</td><td>15.027</td></tr><tr><td>0.50</td><td>15.027</td><td>15.027</td><td>15.026</td></tr><tr><td>0.60</td><td>15.026</td><td>15.026</td><td>15.025</td></tr><tr><td>0.66</td><td>15.026</td><td>15.026</td><td>15.024</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>	Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	15.034	15.034	15.033	0.10	15.031	15.031	15.031	0.20	15.030	15.030	15.029	0.30	15.029	15.029	15.028	0.40	15.028	15.028	15.027	0.50	15.027	15.027	15.026	0.60	15.026	15.026	15.025	0.66	15.026	15.026	15.024	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]																																																
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																
0.00	15.034	15.034	15.033																																																
0.10	15.031	15.031	15.031																																																
0.20	15.030	15.030	15.029																																																
0.30	15.029	15.029	15.028																																																
0.40	15.028	15.028	15.027																																																
0.50	15.027	15.027	15.026																																																
0.60	15.026	15.026	15.025																																																
0.66	15.026	15.026	15.024																																																
—	—	—	—																																																
—	—	—	—																																																

# COSEL

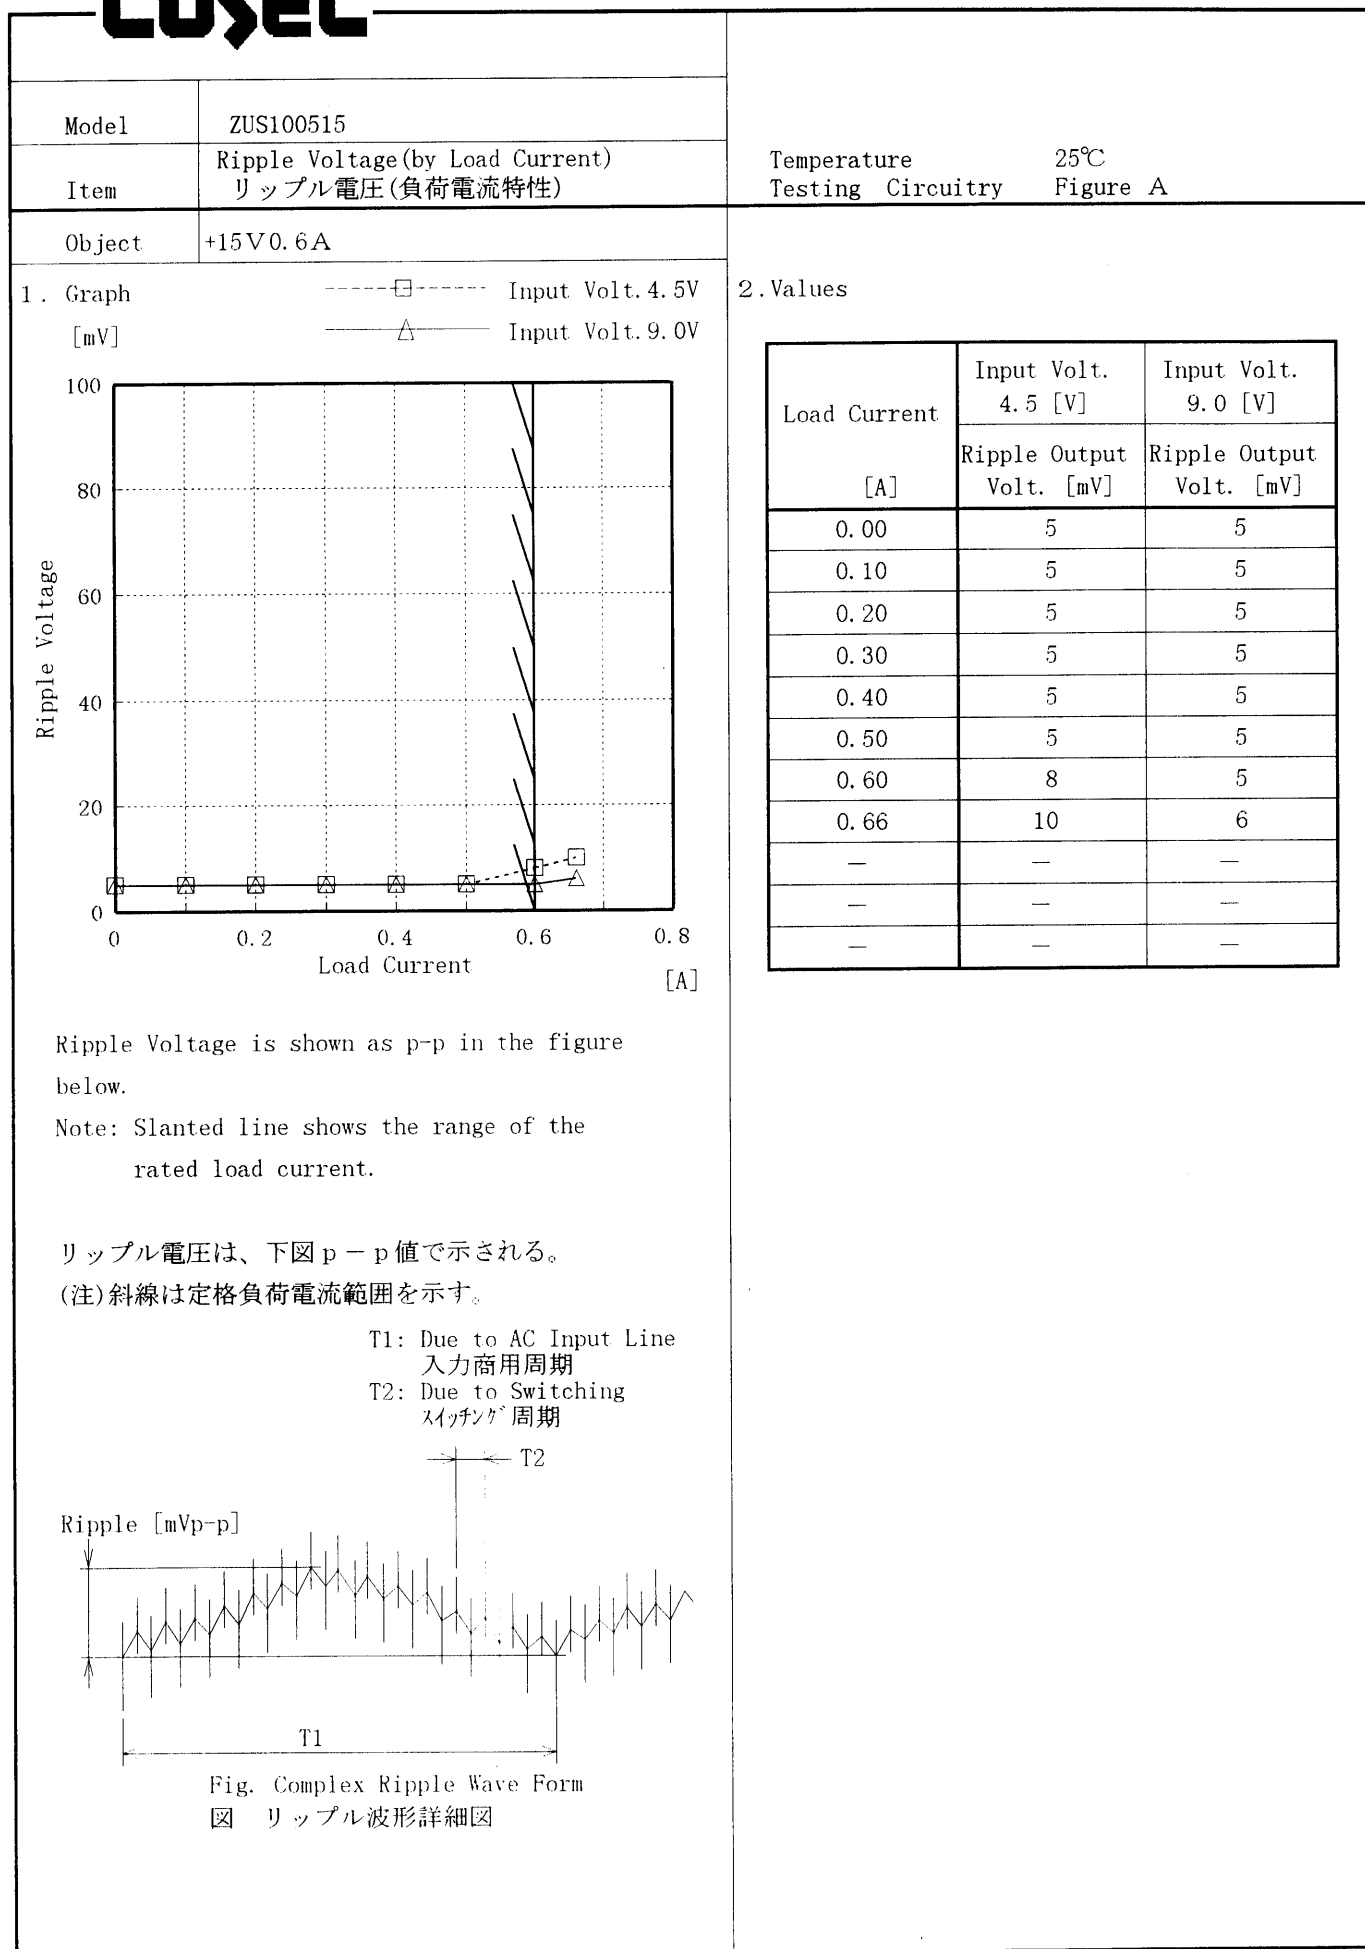

# COSEL

Model	ZUS100515	Temperature	25℃
Item	Ripple-Noise リップルノイズ	Testing Circuitry	Figure A
Object	+15V0.600A		

1. Graph

-----□----- Input Volt. 4.5V

[mV]

-----△----- Input Volt. 9.0V

200

160

120

80

40

0

0

0.2

0.4

0.6

0.8

1

Ripple-Noise

Load Current

[A]

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line  
入力商用周期

T2: Due to Switching  
スイッチング周期

T2

Ripple-Noise

[mVp-p]

T1

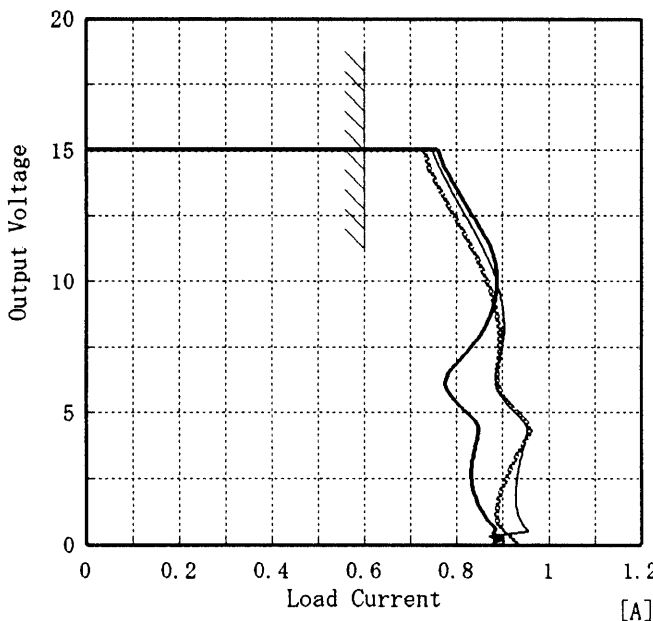
Fig. Complex Ripple Wave Form

図 リップル波形詳細図

2. Values

Load current	Input Volt. 4.5 [V]	Input Volt. 9.0 [V]
[A]	Ripple-Noise [mV]	Ripple-Noise [mV]
0.00	20	30
0.10	30	30
0.20	30	40
0.30	30	40
0.40	30	45
0.50	30	45
0.60	30	45
0.66	30	45
—	—	—
—	—	—
—	—	—

**COSEL**

Model		ZUS100515	Temperature25℃ Testing Circuitry Figure A																																																				
Item		Overcurrent Protection 過電流保護																																																					
Object		+15V0.6A																																																					
1. Graph																																																							
[V]		<div><div>~~~~~</div>Input Volt. 4.5V</div> <div><div>_____</div>Input Volt. 5.0V</div> <div><div>————</div>Input Volt. 9.0V</div>	2. Values																																																				
		<table><tr><th>Output Voltage [V]</th><th>Input Volt. 4.5[V] Load Curr-ent [A]</th><th>Input Volt. 5.0[V] Load Curr-ent [A]</th><th>Input Volt. 9.0[V] Load Curr-ent [A]</th></tr><tr><td>15.00</td><td>0.00</td><td>0.00</td><td>0.00</td></tr><tr><td>14.25</td><td>0.74</td><td>0.77</td><td>0.78</td></tr><tr><td>13.50</td><td>0.76</td><td>0.79</td><td>0.80</td></tr><tr><td>12.00</td><td>0.81</td><td>0.83</td><td>0.85</td></tr><tr><td>10.50</td><td>0.85</td><td>0.87</td><td>0.89</td></tr><tr><td>9.00</td><td>0.88</td><td>0.90</td><td>0.88</td></tr><tr><td>7.50</td><td>0.89</td><td>0.90</td><td>0.83</td></tr><tr><td>6.00</td><td>0.89</td><td>0.88</td><td>0.78</td></tr><tr><td>4.50</td><td>0.96</td><td>0.95</td><td>0.85</td></tr><tr><td>3.00</td><td>0.92</td><td>0.94</td><td>0.83</td></tr><tr><td>1.50</td><td>0.89</td><td>0.93</td><td>0.85</td></tr><tr><td>0.00</td><td>0.93</td><td>0.91</td><td>0.88</td></tr></table>		Output Voltage [V]	Input Volt. 4.5[V] Load Curr-ent [A]	Input Volt. 5.0[V] Load Curr-ent [A]	Input Volt. 9.0[V] Load Curr-ent [A]	15.00	0.00	0.00	0.00	14.25	0.74	0.77	0.78	13.50	0.76	0.79	0.80	12.00	0.81	0.83	0.85	10.50	0.85	0.87	0.89	9.00	0.88	0.90	0.88	7.50	0.89	0.90	0.83	6.00	0.89	0.88	0.78	4.50	0.96	0.95	0.85	3.00	0.92	0.94	0.83	1.50	0.89	0.93	0.85	0.00	0.93	0.91	0.88
Output Voltage [V]	Input Volt. 4.5[V] Load Curr-ent [A]	Input Volt. 5.0[V] Load Curr-ent [A]	Input Volt. 9.0[V] Load Curr-ent [A]																																																				
15.00	0.00	0.00	0.00																																																				
14.25	0.74	0.77	0.78																																																				
13.50	0.76	0.79	0.80																																																				
12.00	0.81	0.83	0.85																																																				
10.50	0.85	0.87	0.89																																																				
9.00	0.88	0.90	0.88																																																				
7.50	0.89	0.90	0.83																																																				
6.00	0.89	0.88	0.78																																																				
4.50	0.96	0.95	0.85																																																				
3.00	0.92	0.94	0.83																																																				
1.50	0.89	0.93	0.85																																																				
0.00	0.93	0.91	0.88																																																				
Note: Slanted line shows the range of the rated load current.																																																							
(注)斜線は定格負荷電流範囲を示す。																																																							



# COSEL



Model	ZUS100515	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+15V 0.600A		

Input Volt. V  
Cycle 100 mS

Load Current



Min. Load ↔  
Load 100 %

500 mV/div

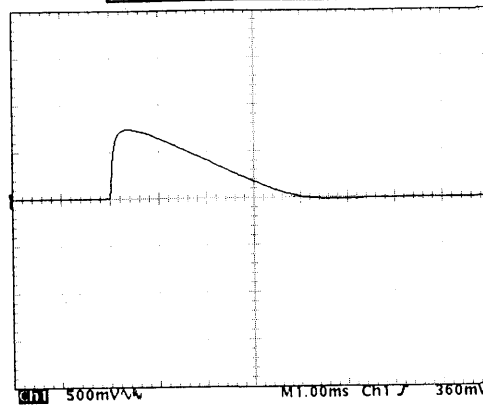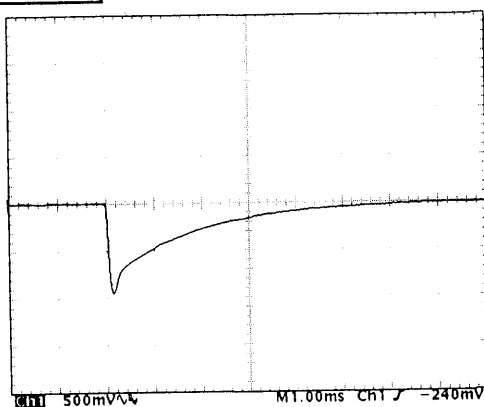



Min. Load ↔  
Load 50 %

500 mV/div

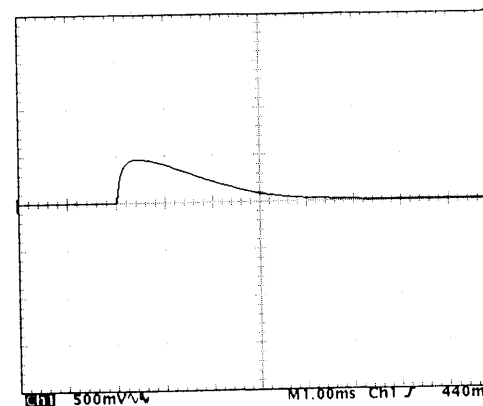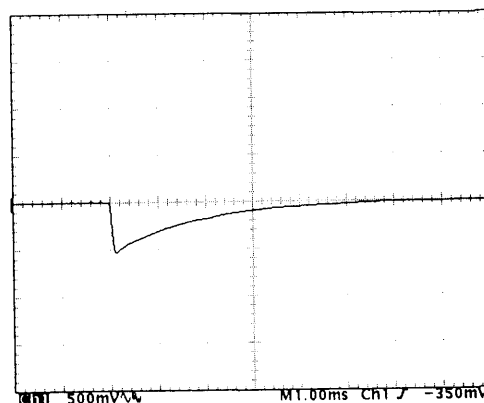

Load 50% ↔  
Load 100 %

500 mV/div

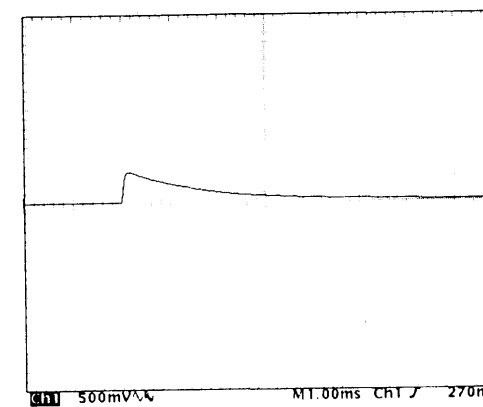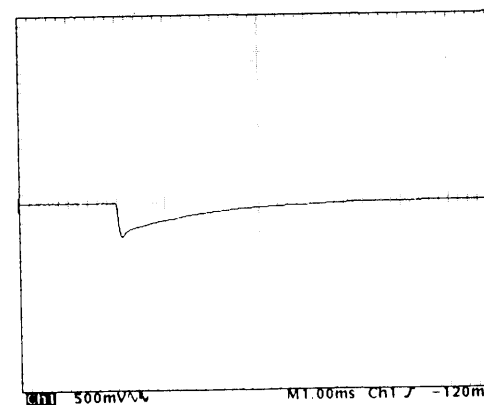


1 mS/div

**COSEL**

Model	ZUS100515	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+15V0.600A		

## 1. Graph


Input Volt. 4.5 V

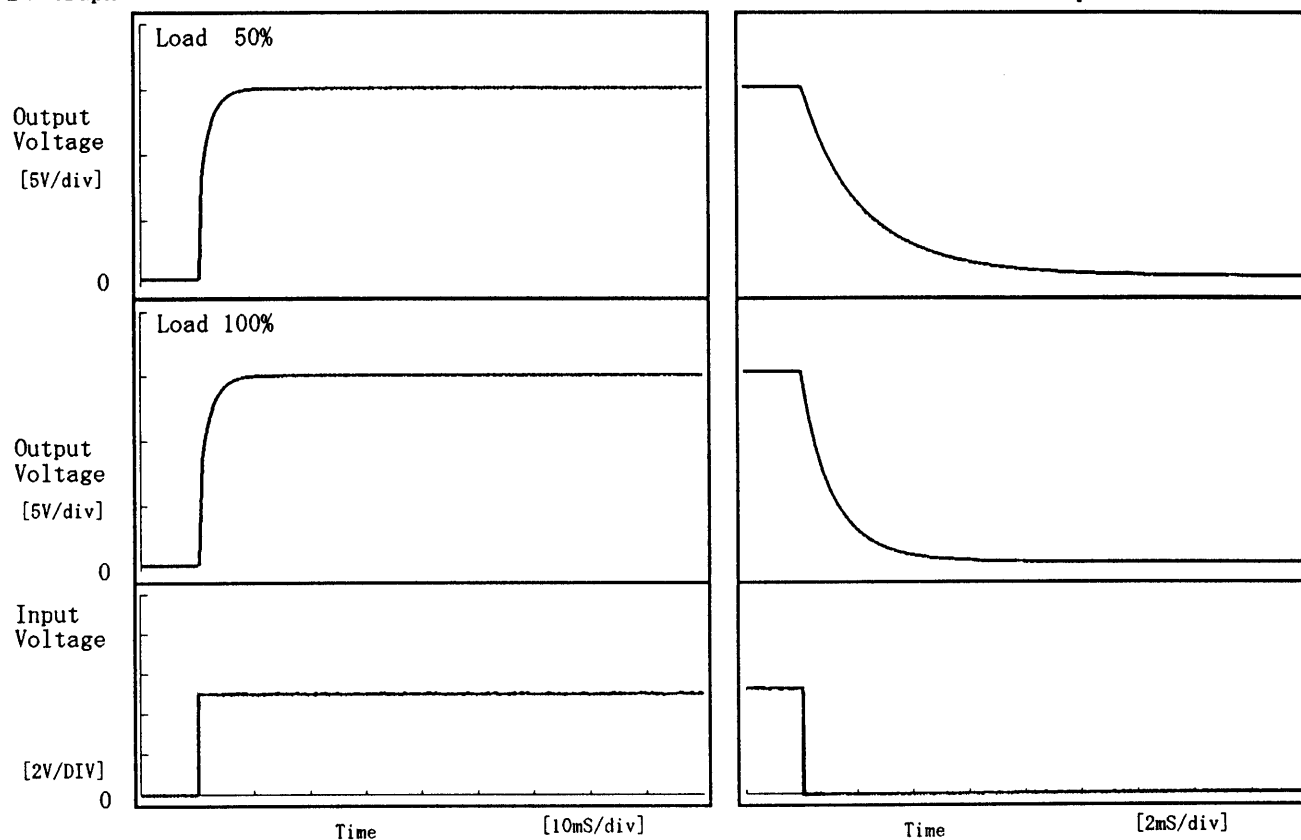

## 2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.35	3.50	3.85	0.27	6.12
100 %	0.30	3.70	4.00	0.14	2.90

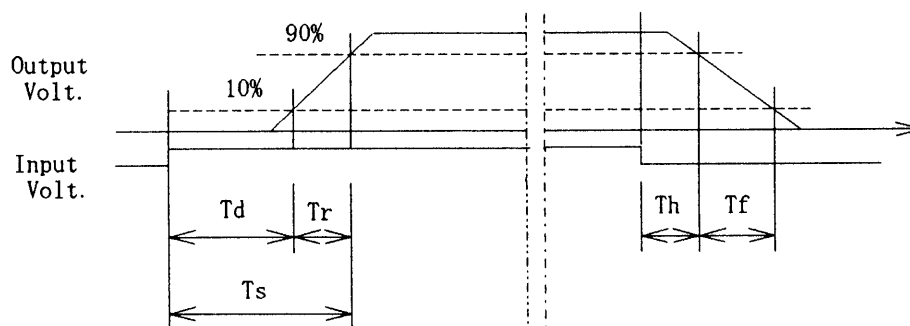

**COSEL**


Model ZUS100515

Item Ambient Temperature Drift  
周囲温度変動

Object +15V0.600A

Testing Circuitry Figure A

## 1. Graph

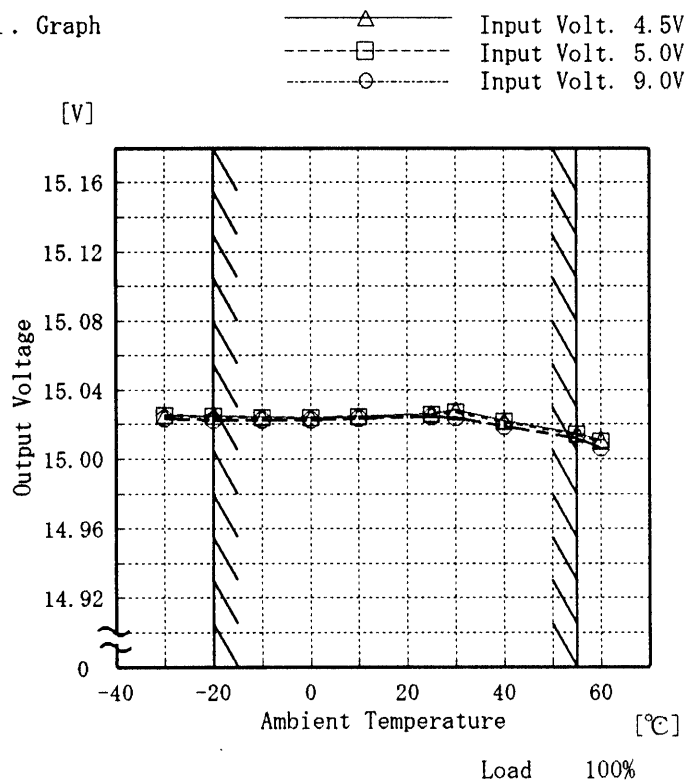

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

## 2. Values

Temperature [°C]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	15.025	15.025	15.023
-20	15.025	15.025	15.023
-10	15.024	15.024	15.022
0	15.024	15.024	15.022
10	15.025	15.024	15.023
25	15.026	15.026	15.024
30	15.028	15.027	15.024
40	15.022	15.021	15.019
55	15.015	15.014	15.012
60	15.011	15.010	15.006
—	—	—	—

# COSEL

Model ZUS100515

Item


Minimum Input Voltage for Regulated Output Voltage  
最低レギュレーション電圧

Object

+15V0.600A

Testing Circuitry Figure A

## 1. Graph

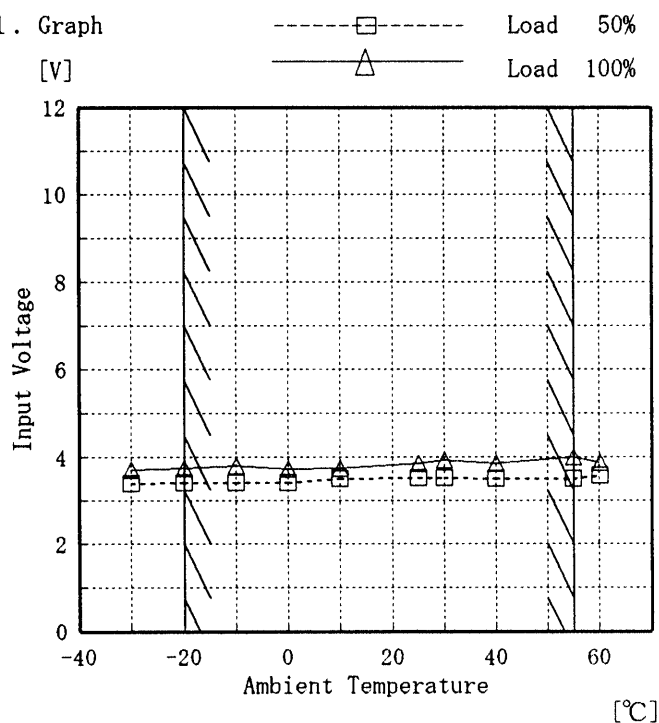

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

## 2. Values

Ambient Temp.	Load 50%	Load 100%
[°C]	Input Volt. [V]	Input Volt. [V]
-30	3.4	3.7
-20	3.4	3.7
-10	3.4	3.8
0	3.4	3.7
10	3.5	3.7
25	3.5	3.9
30	3.5	3.9
40	3.5	3.9
55	3.5	4.0
60	3.6	3.9
—	—	—

**COSEL**

Model		ZUS100515	
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)	
Object		+ 1 5 V 0 . 6 0 0 A	
1. Graph		2. Values	

<

**COSEL**


Model ZUS100515

Item Time Lapse Drift 経時ドリフト

Object +15V0.600A

Temperature 25 °C  
Testing Circuitry Figure A

## 1. Graph

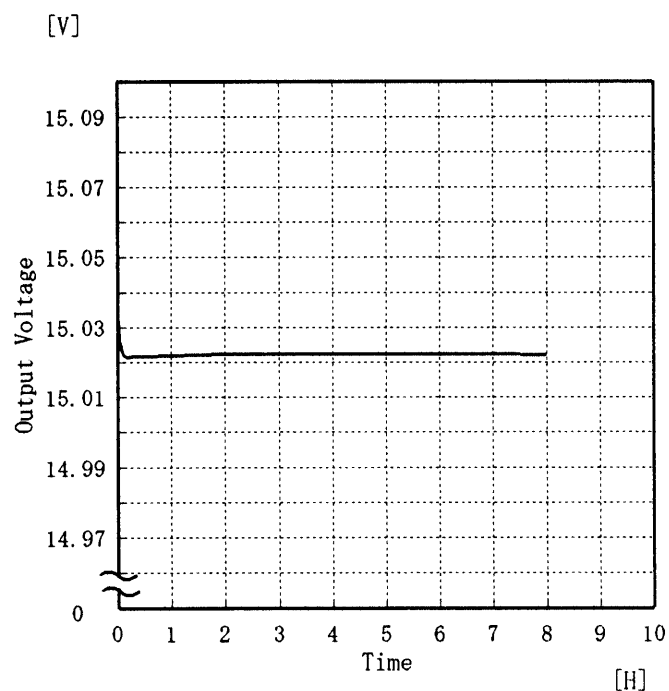

## 2. Values

Time since start [H]	Output Voltage [V]
0.0	15.034
0.5	15.022
1.0	15.022
2.0	15.022
3.0	15.022
4.0	15.022
5.0	15.022
6.0	15.022
7.0	15.023
8.0	15.022

# COSEL

Model		ZUS100515	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+15V0.600A	

## Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 4.5~9.0 V

Load Current : 0.000~0.600 A

\* Output Voltage Accuracy =  $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ration) =  $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

## 定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 4.5~9.0 V

負荷電流 : 0.000~0.600 A

\* 定電圧精度(変動値) =  $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

\* 定電圧精度(変動率) =  $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	25	4.5	0.000	15.034	±14	±0.1
Minimum Voltage	55	9.0	0.600	15.006		

# COSEL

Model	ZUS100515	Testing Circuitry      Figure A
Item	Condensation 結露特性	
Object	+15V0.600A	

## 1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at  $-10^{\circ}\text{C}$  for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is  $25^{\circ}\text{C}$  and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

## 1. 結露特性試験

入力を切った状態で、恒温槽で $-10^{\circ}\text{C}$ に冷却しておき、約1時間後に恒温槽から取り出し、室温 $25^{\circ}\text{C}$ 、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

## 2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	15.023	5	40
	2	15.020	5	40
	3	15.023	5	40
Load 100 %	1	15.016	10	35
	2	15.017	10	35
	3	15.021	10	35

Input Volt. 5.0 V



**COSEL**

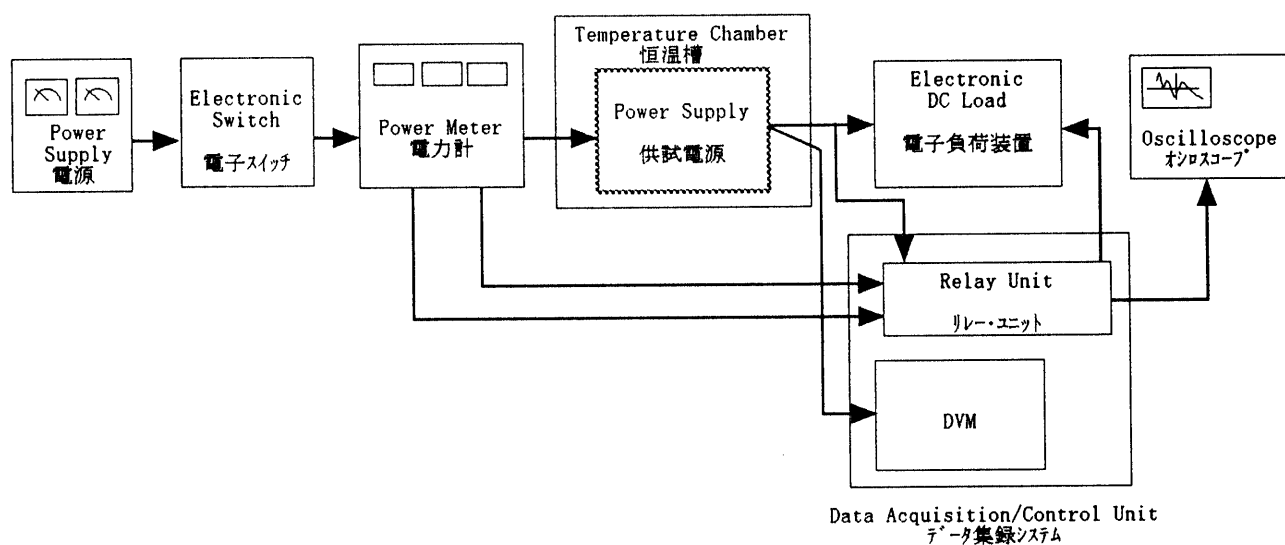


Figure A