



# TEST DATA OF ZUS30505

(5.0V INPUT)

Regulated DC Power Supply

Date : Nov. 5. 1996

Approved by : T. Sugimori  
Design Manager

Prepared by : y. Nagai  
Design Engineer

コーセル株式会社  
COSEL CO., LTD.

CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Efficiency . . . . .	2
効率	
3. Load Regulation . . . . .	3
静的負荷変動	
4. Ripple Voltage (by Load Current) . . . . .	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise . . . . .	5
リップルノイズ	
6. Overcurrent Protection . . . . .	6
過電流保護	
7. Dynamic Load Responce . . . . .	7
動的負荷変動	
8. Rise and Fall Time . . . . .	8
立上り、立下がり時間	
9. Ambient Temperature Drift . . . . .	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature) . . . . .	11
リップル電圧 (周囲温度特性)	
12. Time Lapse Drift . . . . .	12
経時ドリフト	
13. Output Voltage Accuracy . . . . .	13
定電圧精度	
14. Condensation . . . . .	14
結露特性	
15. Figure of Testing Circuitry . . . . .	15
測定回路図	

(Final Page 15 )

**COSEL**

Model		ZUS30505		Temperature		25℃	
Item		Line Regulation 静的入力変動		Testing Circuitry		Figure A	
Object		+5V0.6A					
1. Graph				2. Values			

-----□----- Load 50%

-----△----- Load 100%

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。


Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]
4.0	5.097	5.095
4.5	5.097	5.096
5.0	5.098	5.096
6.0	5.098	5.096
7.0	5.098	5.096
8.0	5.098	5.096
9.0	5.098	5.096
9.5	5.098	5.096
—	—	—
—	—	—
—	—	—
—	—	—

# COSEL

Model	ZUS30505
Item	Efficiency 効率
Object	

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

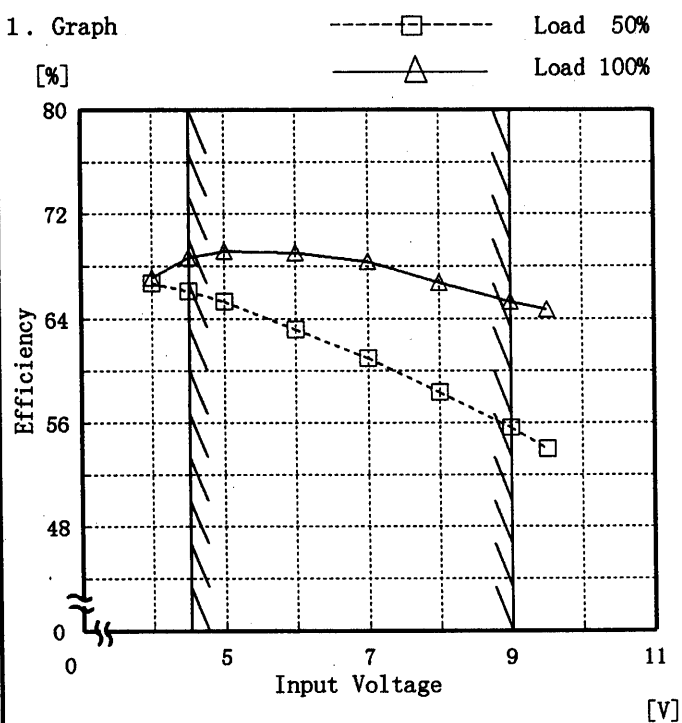

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。


## 2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
4.0	66.7	67.1
4.5	66.1	68.7
5.0	65.3	69.1
6.0	63.2	69.1
7.0	61.0	68.4
8.0	58.4	66.8
9.0	55.6	65.3
9.5	54.0	64.7
—	—	—
—	—	—
—	—	—
—	—	—


# COSEL

Model		ZUS30505	Temperature		25℃																																															
Item		Load Regulation 静的負荷変動	Testing Circuitry		Figure A																																															
Object		+5V0.6A																																																		
1. Graph			2. Values																																																	
<div><div><div>—△—</div><div>Input Volt. 4.5V</div></div><div><div>---□---</div><div>Input Volt. 5.0V</div></div><div><div>---○---</div><div>Input Volt. 9.0V</div></div></div> <div><div><div>[V]</div><div>Output Voltage</div><div>Load Current</div><div>[A]</div></div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>			<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.00</td><td>5.099</td><td>5.099</td><td>5.100</td></tr><tr><td>0.10</td><td>5.099</td><td>5.099</td><td>5.099</td></tr><tr><td>0.20</td><td>5.098</td><td>5.098</td><td>5.098</td></tr><tr><td>0.30</td><td>5.098</td><td>5.098</td><td>5.098</td></tr><tr><td>0.40</td><td>5.097</td><td>5.097</td><td>5.097</td></tr><tr><td>0.50</td><td>5.096</td><td>5.096</td><td>5.096</td></tr><tr><td>0.60</td><td>5.096</td><td>5.096</td><td>5.096</td></tr><tr><td>0.66</td><td>5.096</td><td>5.096</td><td>5.095</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>			Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	5.099	5.099	5.100	0.10	5.099	5.099	5.099	0.20	5.098	5.098	5.098	0.30	5.098	5.098	5.098	0.40	5.097	5.097	5.097	0.50	5.096	5.096	5.096	0.60	5.096	5.096	5.096	0.66	5.096	5.096	5.095	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]																																																	
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																	
0.00	5.099	5.099	5.100																																																	
0.10	5.099	5.099	5.099																																																	
0.20	5.098	5.098	5.098																																																	
0.30	5.098	5.098	5.098																																																	
0.40	5.097	5.097	5.097																																																	
0.50	5.096	5.096	5.096																																																	
0.60	5.096	5.096	5.096																																																	
0.66	5.096	5.096	5.095																																																	
—	—	—	—																																																	
—	—	—	—																																																	

# COSEL

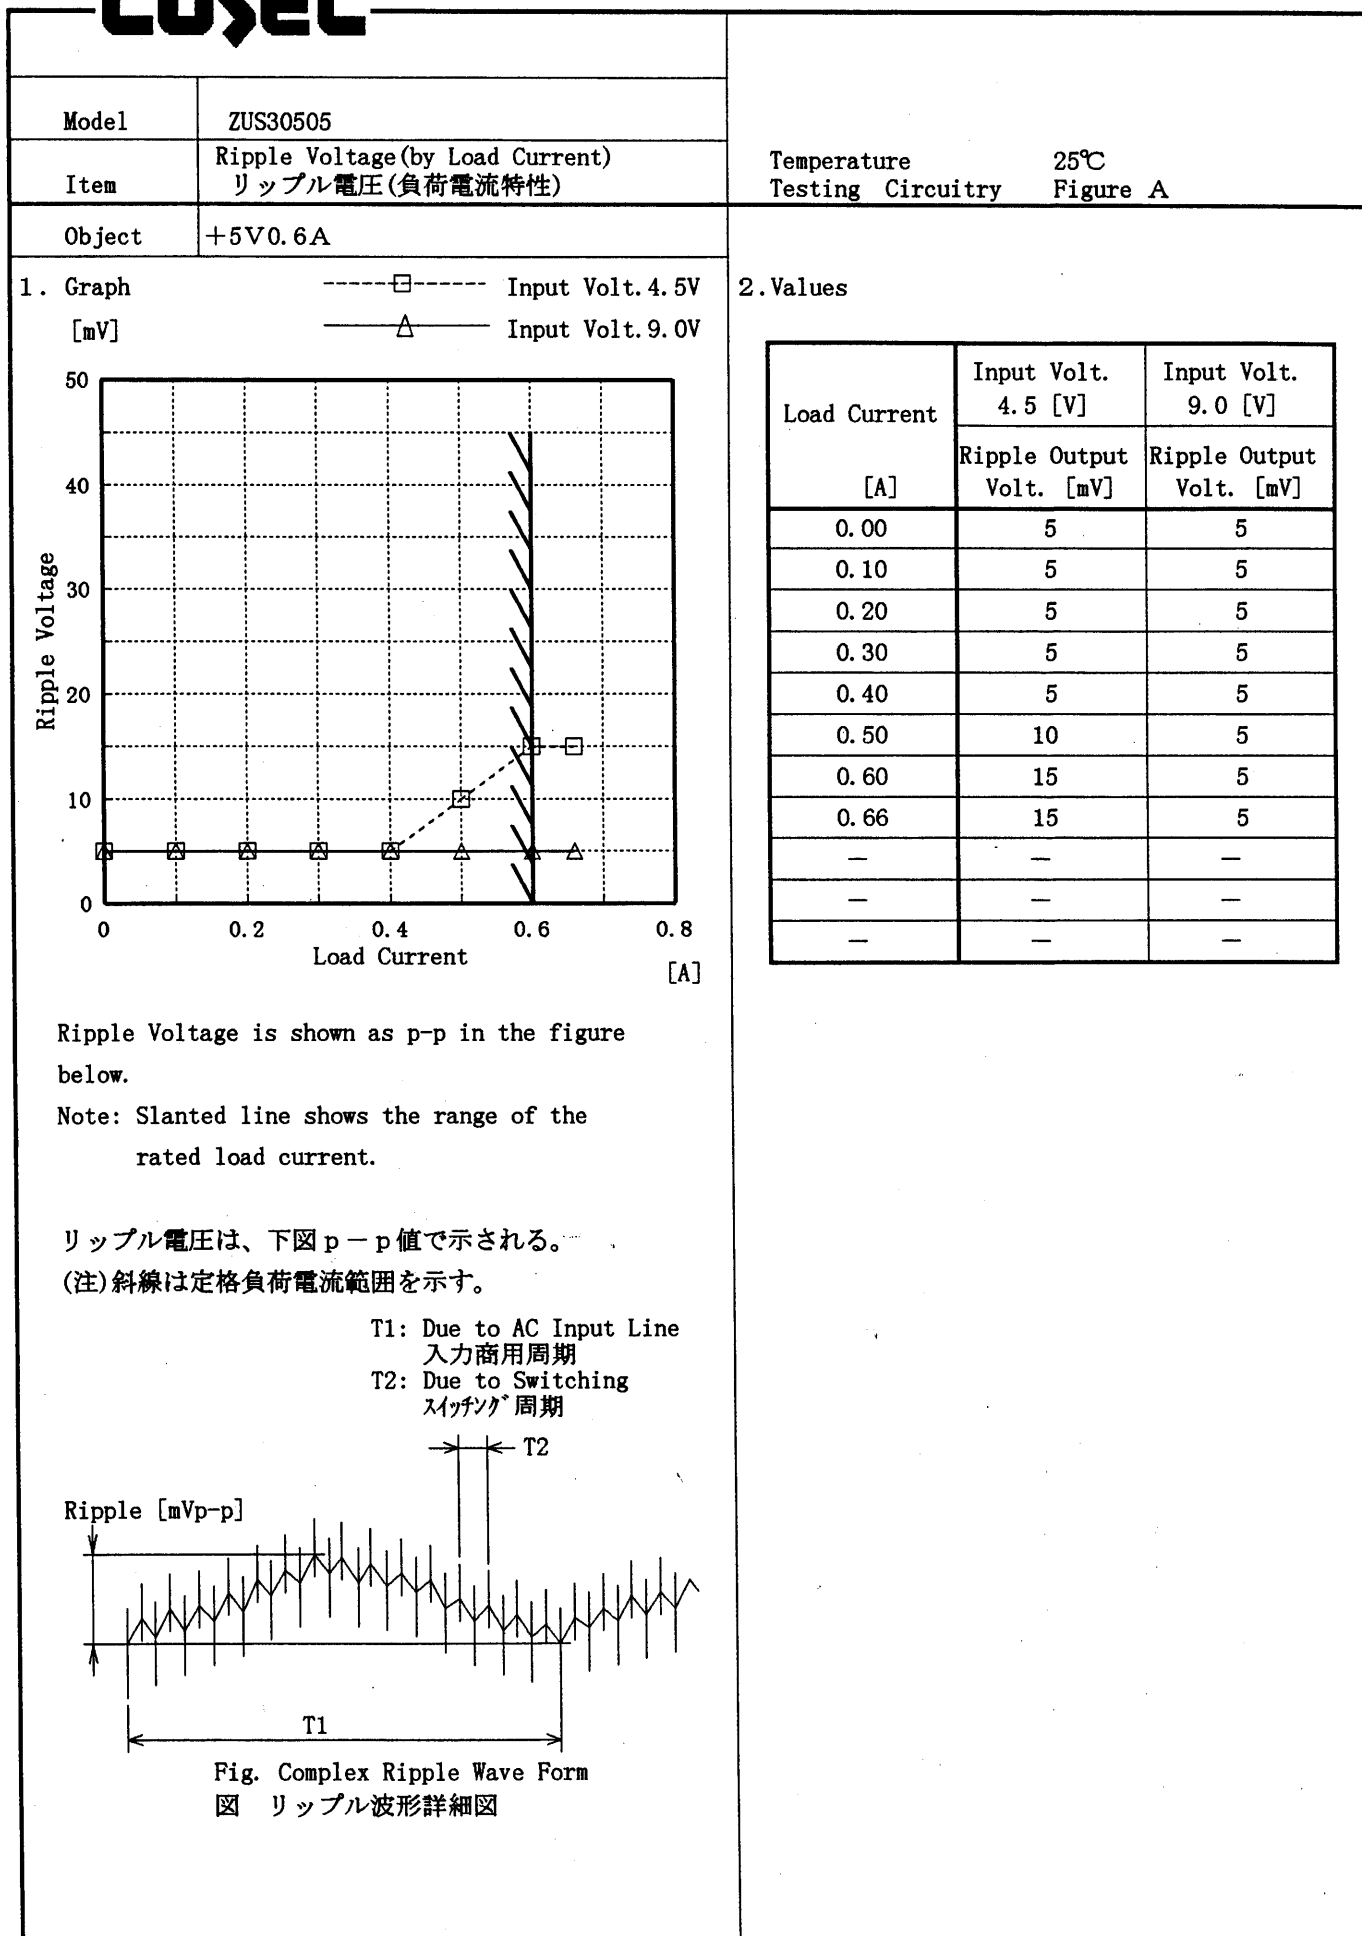

# COSEL

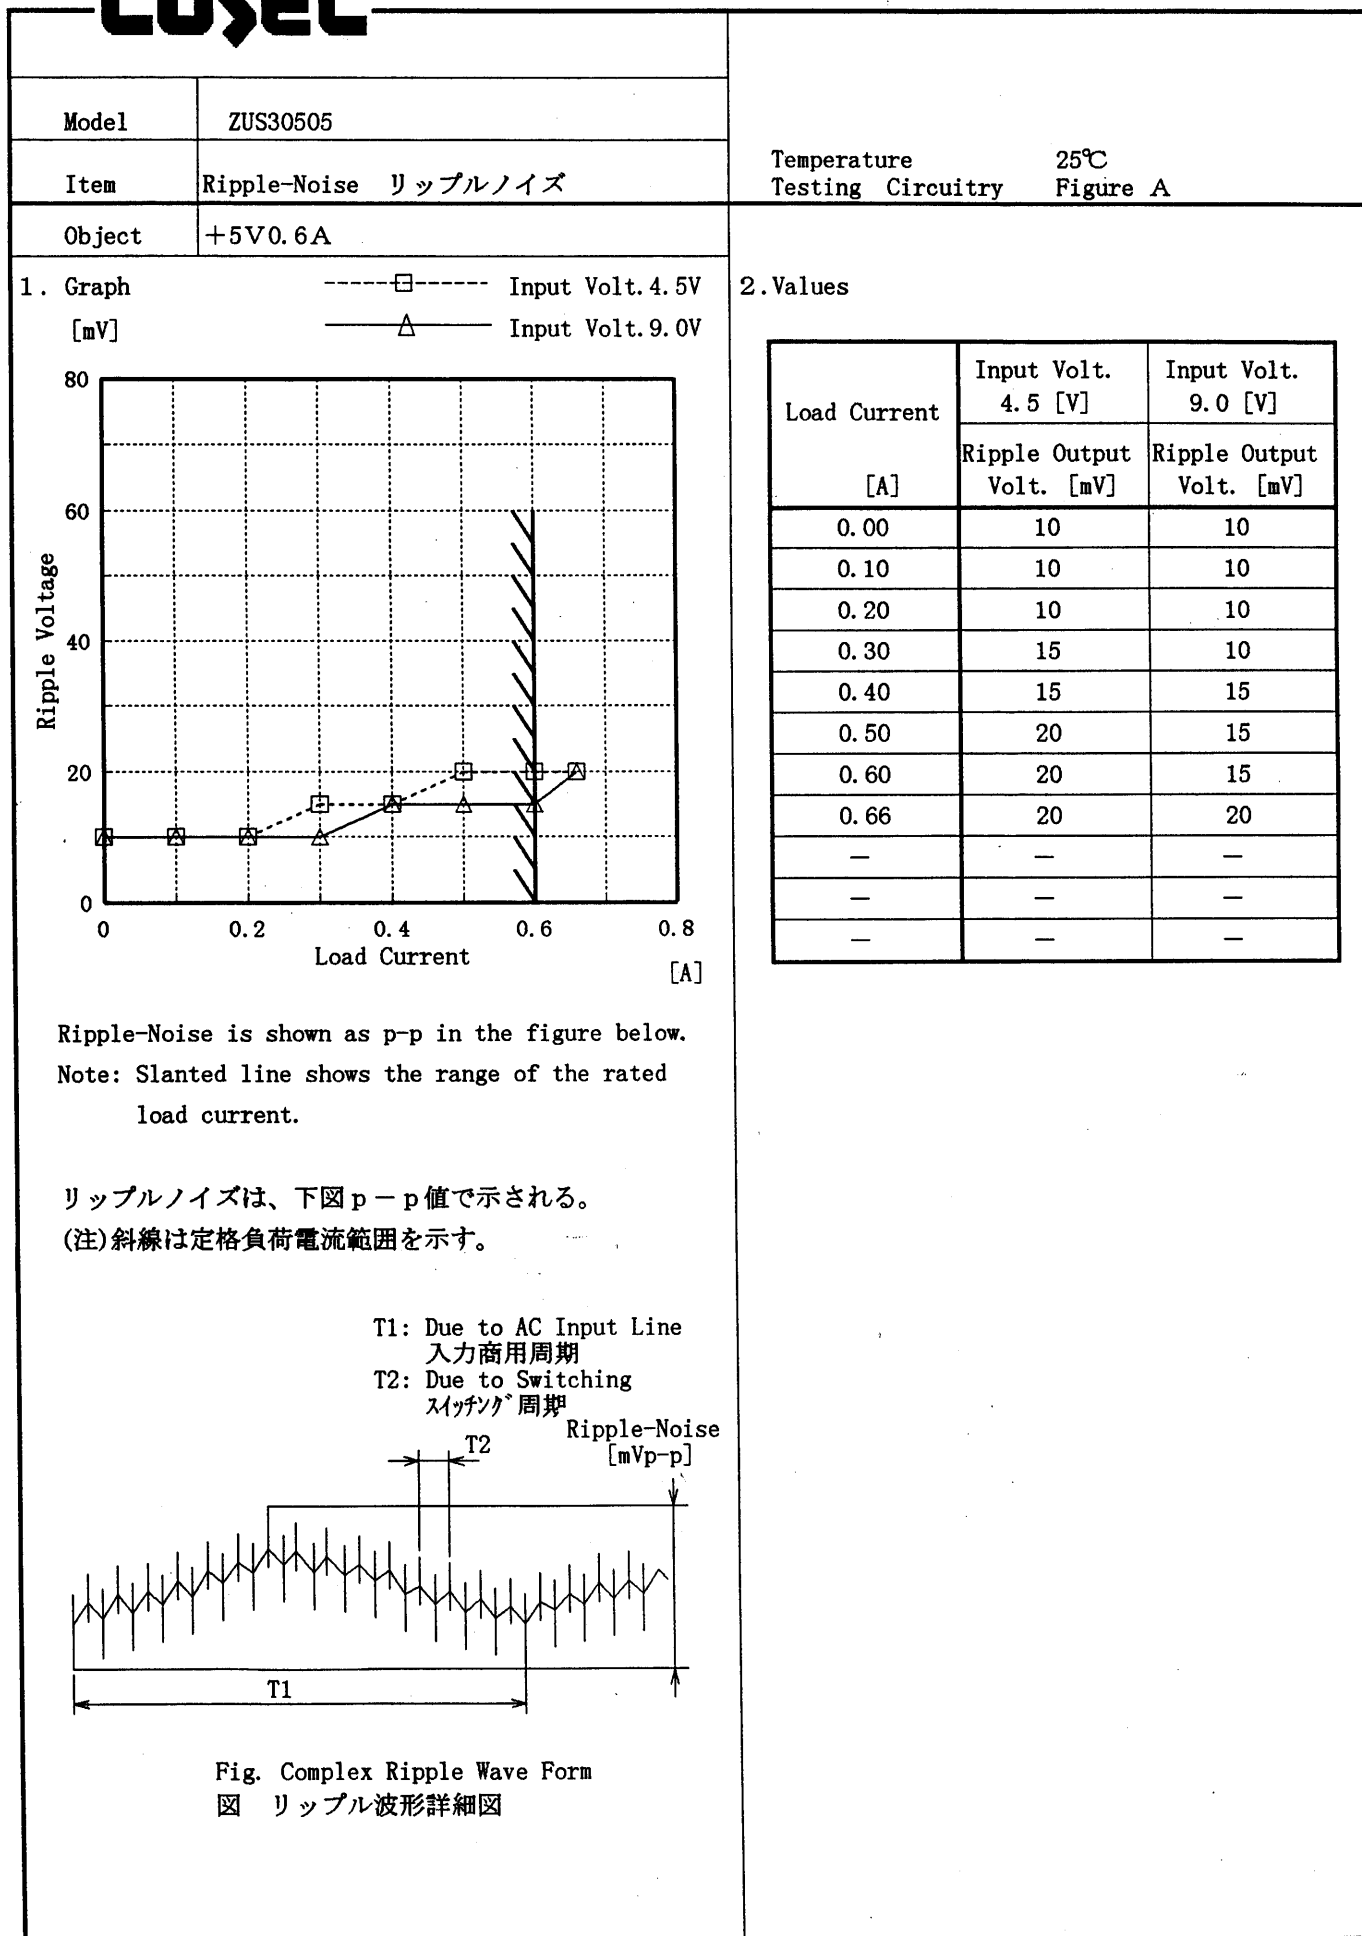


# COSEL

Model	ZUS30505
Item	Overcurrent Protection 過電流保護
Object	+5V0.6A

## 1. Graph

[V]

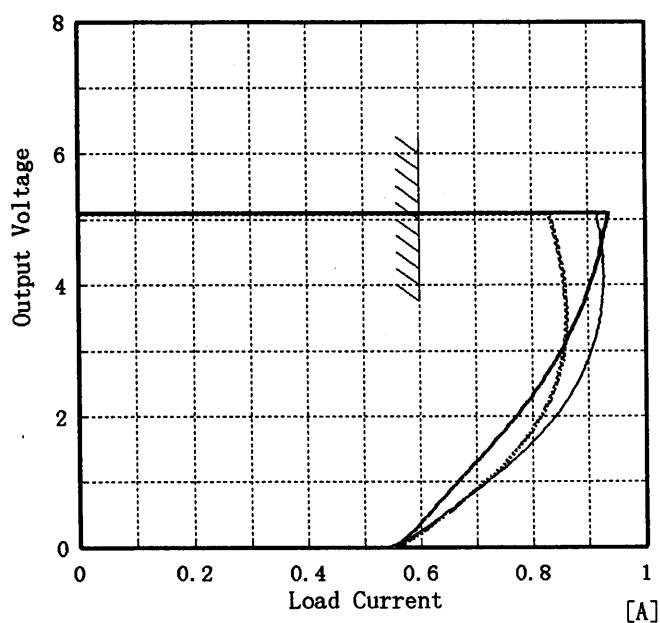

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

Temperature 25°C  
Testing Circuitry Figure A

## 2. Values

Output Voltage [V]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
5.00	0.83	0.92	0.93
4.75	0.84	0.92	0.93
4.50	0.85	0.93	0.92
4.00	0.86	0.93	0.90
3.50	0.86	0.92	0.88
3.00	0.86	0.90	0.85
2.50	0.84	0.88	0.81
2.00	0.81	0.84	0.77
1.50	0.77	0.79	0.72
1.00	0.72	0.72	0.67
0.50	0.65	0.64	0.62
0.00	0.54	0.55	0.63



# COSEL

Model	ZUS30505	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+5V0.6A		

Input Volt. 5.0 V


Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %


100 mV/div

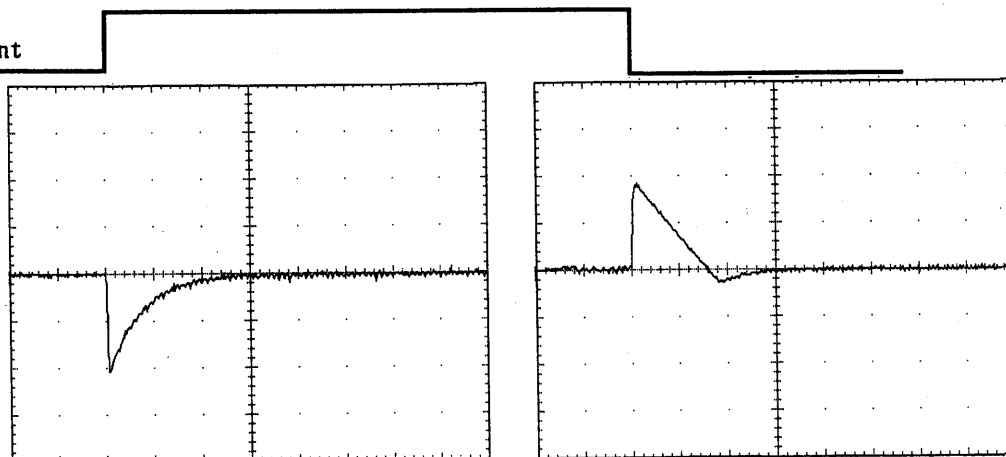

Min. Load ↔

Load 50 %


100 mV/div

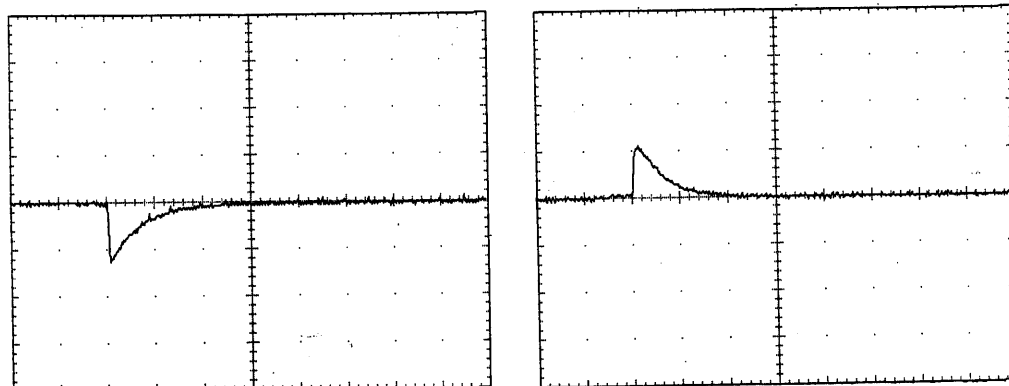

Load 50% ↔

Load 100 %

100 mV/div

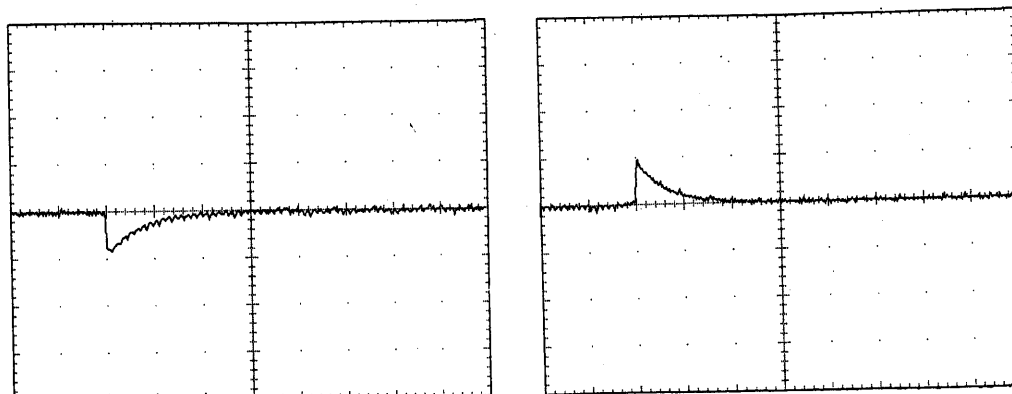


0.5 mS/div

**COSEL**

Model	ZUS30505	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+5V 0.6A		

## 1. Graph


Input Volt. 4.5 V

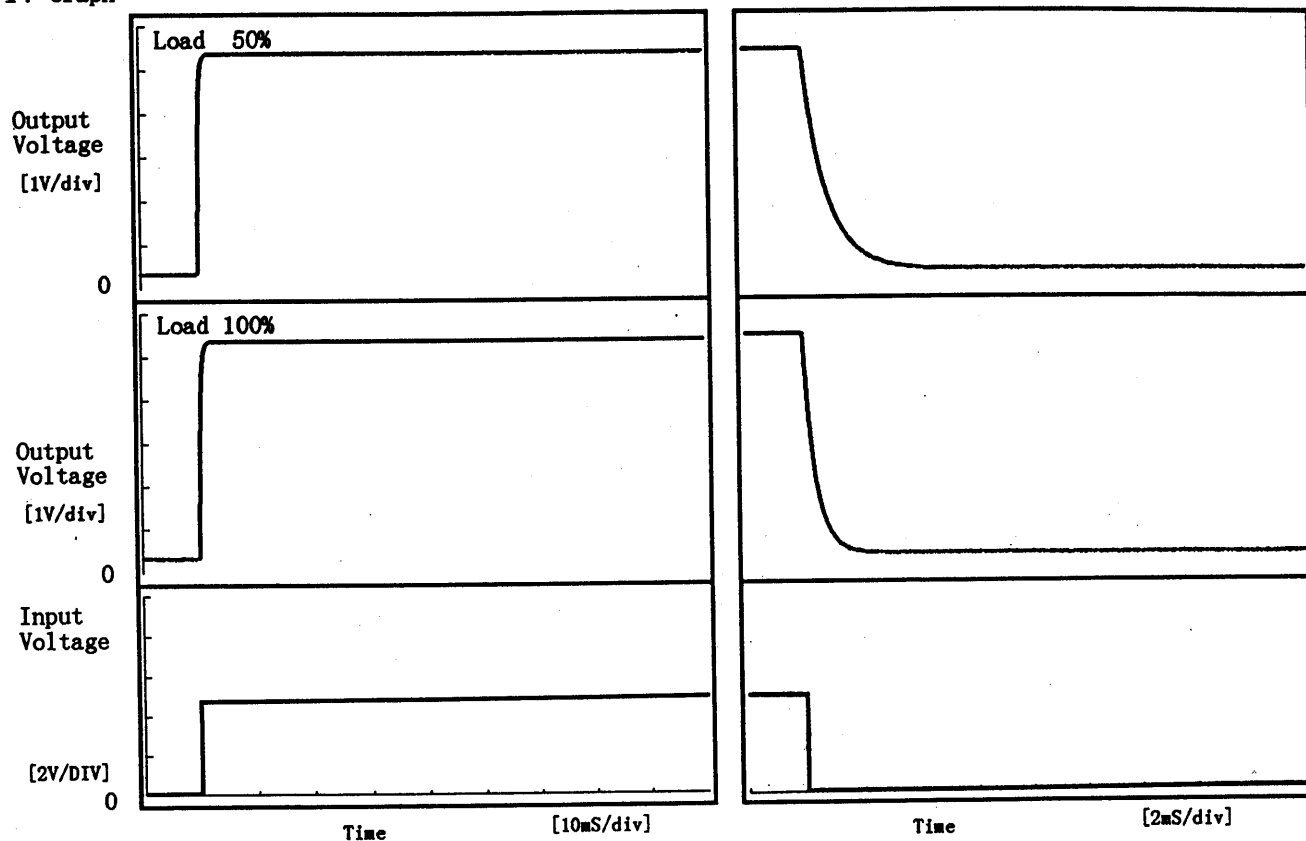

## 2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.05	0.55	0.60	0.14	1.96
100 %	0.10	0.55	0.65	0.06	0.98

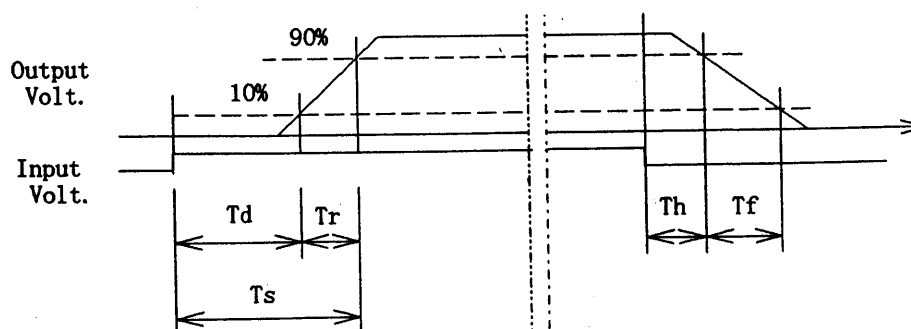

# COSEL

Model		ZUS30505		Testing Circuitry    Figure A
Item		Ambient Temperature Drift 周囲温度変動		
Object		+5V0.6A		

1. Graph

△

Input Volt. 4.5V

□

Input Volt. 5.0V

○

Input Volt. 9.0V

Output Voltage [V]

# COSEL

Model		ZUS30505																																				
Item		Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧																																				
Object		+5V0.6A																																				
1. Graph		<div> <div> <div>-----□-----</div> <div>Load 50%</div> </div> <div> <div>-----△-----</div> <div>Load 100%</div> </div> </div> <p>Input Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>																																				
2. Values		<table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th><th>Load 50% Input Volt. [V]</th><th>Load 100% Input Volt. [V]</th></tr> </thead> <tbody> <tr><td>-30</td><td>3.1</td><td>3.9</td></tr> <tr><td>-20</td><td>3.0</td><td>3.8</td></tr> <tr><td>-10</td><td>3.0</td><td>3.8</td></tr> <tr><td>0</td><td>2.9</td><td>3.7</td></tr> <tr><td>10</td><td>2.9</td><td>3.6</td></tr> <tr><td>25</td><td>2.8</td><td>3.5</td></tr> <tr><td>30</td><td>2.8</td><td>3.5</td></tr> <tr><td>40</td><td>2.7</td><td>3.5</td></tr> <tr><td>55</td><td>2.7</td><td>3.4</td></tr> <tr><td>60</td><td>2.7</td><td>3.4</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]	-30	3.1	3.9	-20	3.0	3.8	-10	3.0	3.8	0	2.9	3.7	10	2.9	3.6	25	2.8	3.5	30	2.8	3.5	40	2.7	3.5	55	2.7	3.4	60	2.7	3.4	—	—	—
Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]																																				
-30	3.1	3.9																																				
-20	3.0	3.8																																				
-10	3.0	3.8																																				
0	2.9	3.7																																				
10	2.9	3.6																																				
25	2.8	3.5																																				
30	2.8	3.5																																				
40	2.7	3.5																																				
55	2.7	3.4																																				
60	2.7	3.4																																				
—	—	—																																				

# COSEL

LOGEL

Model	ZUS30505
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+5V0.6A

1. Graph

-----□----- Load 50%

——△—— Load 100%

[mV]

40

30

20

10

0

Ripple Voltage

40

30

20

10

0

A line graph showing Ripple Voltage [mV] on the y-axis (0 to 40) versus Ambient Temperature [°C] on the x-axis (-40 to 60). Two data series are plotted: Load 50% (represented by squares and a dashed line) and Load 100% (represented by triangles and a solid line). The Load 50% series is a horizontal line at 5 mV. The Load 100% series is a horizontal line at 15 mV from -40°C to 25°C, then drops to 10 mV at 30°C and remains at 10 mV up to 60°C. Two slanted lines form a V-shape, indicating the rated ambient temperature range. The left slanted line starts at (-40, 38) and goes down to (-20, 0). The right slanted line starts at (60, 38) and goes down to (55, 0). The bottom of the V is at approximately -15°C and 55°C.

-40 -20 0 20 40 60

Ambient Temperature

[°C]

Input Volt. 4.5 V

Note: Slanted line shows the range of the rated ambient temperature.


(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry      Figure A

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-30	5	15
-20	5	15
-10	5	15
0	5	15
10	5	15
25	5	15
30	5	10
40	5	10
55	5	10
60	5	10
—	—	—

**COSEL**

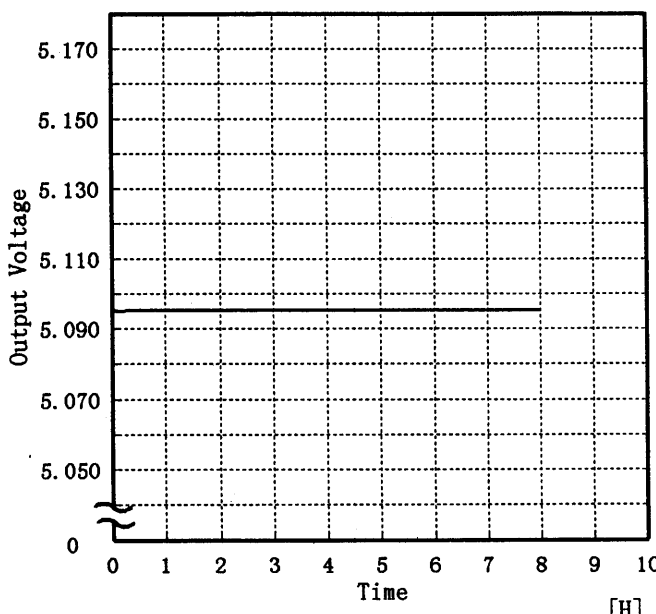COSEL																									
Model	ZUS30505																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25 ℃																						
Object	+5V0.6A	Testing Circuitry	Figure A																						
1. Graph		2.Values																							
<div>[V]</div> <div></div> <div>Output Voltage [V]</div> <div>Time [H]</div> <div>Input Volt. 5V</div> <div>Load 100%</div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>5.096</td></tr><tr><td>0.5</td><td>5.095</td></tr><tr><td>1.0</td><td>5.095</td></tr><tr><td>2.0</td><td>5.095</td></tr><tr><td>3.0</td><td>5.095</td></tr><tr><td>4.0</td><td>5.095</td></tr><tr><td>5.0</td><td>5.095</td></tr><tr><td>6.0</td><td>5.095</td></tr><tr><td>7.0</td><td>5.095</td></tr><tr><td>8.0</td><td>5.095</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	5.096	0.5	5.095	1.0	5.095	2.0	5.095	3.0	5.095	4.0	5.095	5.0	5.095	6.0	5.095	7.0	5.095	8.0	5.095
Time since start [H]	Output Voltage [V]																								
0.0	5.096																								
0.5	5.095																								
1.0	5.095																								
2.0	5.095																								
3.0	5.095																								
4.0	5.095																								
5.0	5.095																								
6.0	5.095																								
7.0	5.095																								
8.0	5.095																								

**COSEL**

Model	ZUS30505	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+5V0.6A	

## Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 4.5~9.0 V

Load Current : 0.0~0.6 A

\* Output Voltage Accuracy =  $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ratio) =  $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

## 定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~55 °C

入力電圧 4.5~9.0 V

負荷電流 0.0~0.6 A

\* 定電圧精度(変動値) =  $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

\* 定電圧精度(変動率) =  $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ratio) [%]
Maximum Voltage	25	9.0	0.0	5.100	±7	±0.2
Minimum Voltage	-20	4.5	0.6	5.087		

# COSEL

Model		ZUS30505	Testing Circuitry      Figure A
Item		Condensation 結露特性	
Object		+5V0.6A	

## 1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

## 1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

## 2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	5.076	5	15
	2	5.076	5	15
	3	5.076	5	15
Load 100 %	1	5.074	10	25
	2	5.075	10	25
	3	5.074	10	25

Input Volt. 5.0 V



