



# TEST DATA OF ZUS32405

(24.0V INPUT)

Regulated DC Power Supply

Date : Nov. 5. 1996

Approved by : T. Sugimori  
Design Manager

Prepared by : Y. Nagai  
Design Engineer

コーセル株式会社  
COSEL CO., LTD.

CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Efficiency . . . . .	2
効率	
3. Load Regulation . . . . .	3
静的負荷変動	
4. Ripple Voltage (by Load Current) . . . . .	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise . . . . .	5
リップルノイズ	
6. Overcurrent Protection . . . . .	6
過電流保護	
7. Dynamic Load Responce . . . . .	7
動的負荷変動	
8. Rise and Fall Time . . . . .	8
立上り、立下がり時間	
9. Ambient Temperature Drift . . . . .	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature) . . . . .	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift . . . . .	12
経時ドリフト	
13. Output Voltage Accuracy . . . . .	13
定電圧精度	
14. Condensation . . . . .	14
結露特性	
15. Figure of Testing Circuitry . . . . .	15
測定回路図	

(Final Page 15 )


# COSEL

Model		ZUS32405	Temperature25℃ Testing CircuitryFigure A																																										
Item		Line Regulation  静的入力変動																																											
Object		+5V0.6A																																											
1. Graph		<div><div>-----□-----</div>Load 50%</div> <div><div>-----△-----</div>Load 100%</div> <div><div>[V]</div><div><div>5.140</div><div>5.120</div><div>5.100</div><div>5.080</div><div>5.060</div><div>5.040</div><div>5.020</div><div>0</div></div><div><div>Output Voltage</div><div>[V]</div></div><div><div>0</div><div>15</div><div>25</div><div>35</div><div>45</div></div><div><div>Input Voltage</div><div>[V]</div></div></div> <div>Note: Slanted line shows the range of the rated input voltage.  (注)斜線は定格入力電圧範囲を示す。</div>	2. Values																																										
		<table><tr><th rowspan="2">Input Voltage [V]</th><th>Load 50%</th><th>Load 100%</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>16.0</td><td>5.066</td><td>5.064</td></tr><tr><td>18.0</td><td>5.066</td><td>5.064</td></tr><tr><td>20.0</td><td>5.066</td><td>5.064</td></tr><tr><td>24.0</td><td>5.066</td><td>5.064</td></tr><tr><td>30.0</td><td>5.066</td><td>5.064</td></tr><tr><td>36.0</td><td>5.066</td><td>5.064</td></tr><tr><td>40.0</td><td>5.066</td><td>5.064</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>	Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	16.0	5.066	5.064	18.0	5.066	5.064	20.0	5.066	5.064	24.0	5.066	5.064	30.0	5.066	5.064	36.0	5.066	5.064	40.0	5.066	5.064	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
Input Voltage [V]	Load 50%	Load 100%																																											
	Output Volt. [V]	Output Volt. [V]																																											
16.0	5.066	5.064																																											
18.0	5.066	5.064																																											
20.0	5.066	5.064																																											
24.0	5.066	5.064																																											
30.0	5.066	5.064																																											
36.0	5.066	5.064																																											
40.0	5.066	5.064																																											
—	—	—																																											
—	—	—																																											
—	—	—																																											
—	—	—																																											
—	—	—																																											

# COSEL

Model	ZUS32405
Item	Efficiency 効率
Object	

Temperature 25℃  
Testing Circuitry Figure A

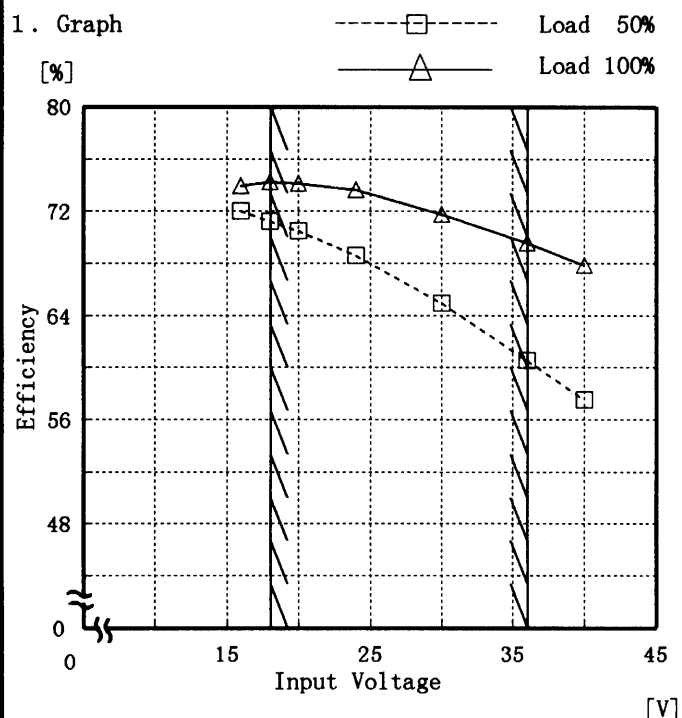


## 2. Values


Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
16.0	72.0	73.9
18.0	71.2	74.3
20.0	70.5	74.2
24.0	68.6	73.7
30.0	64.9	71.8
36.0	60.6	69.6
40.0	57.5	67.9
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

BC-2029

# COSEL

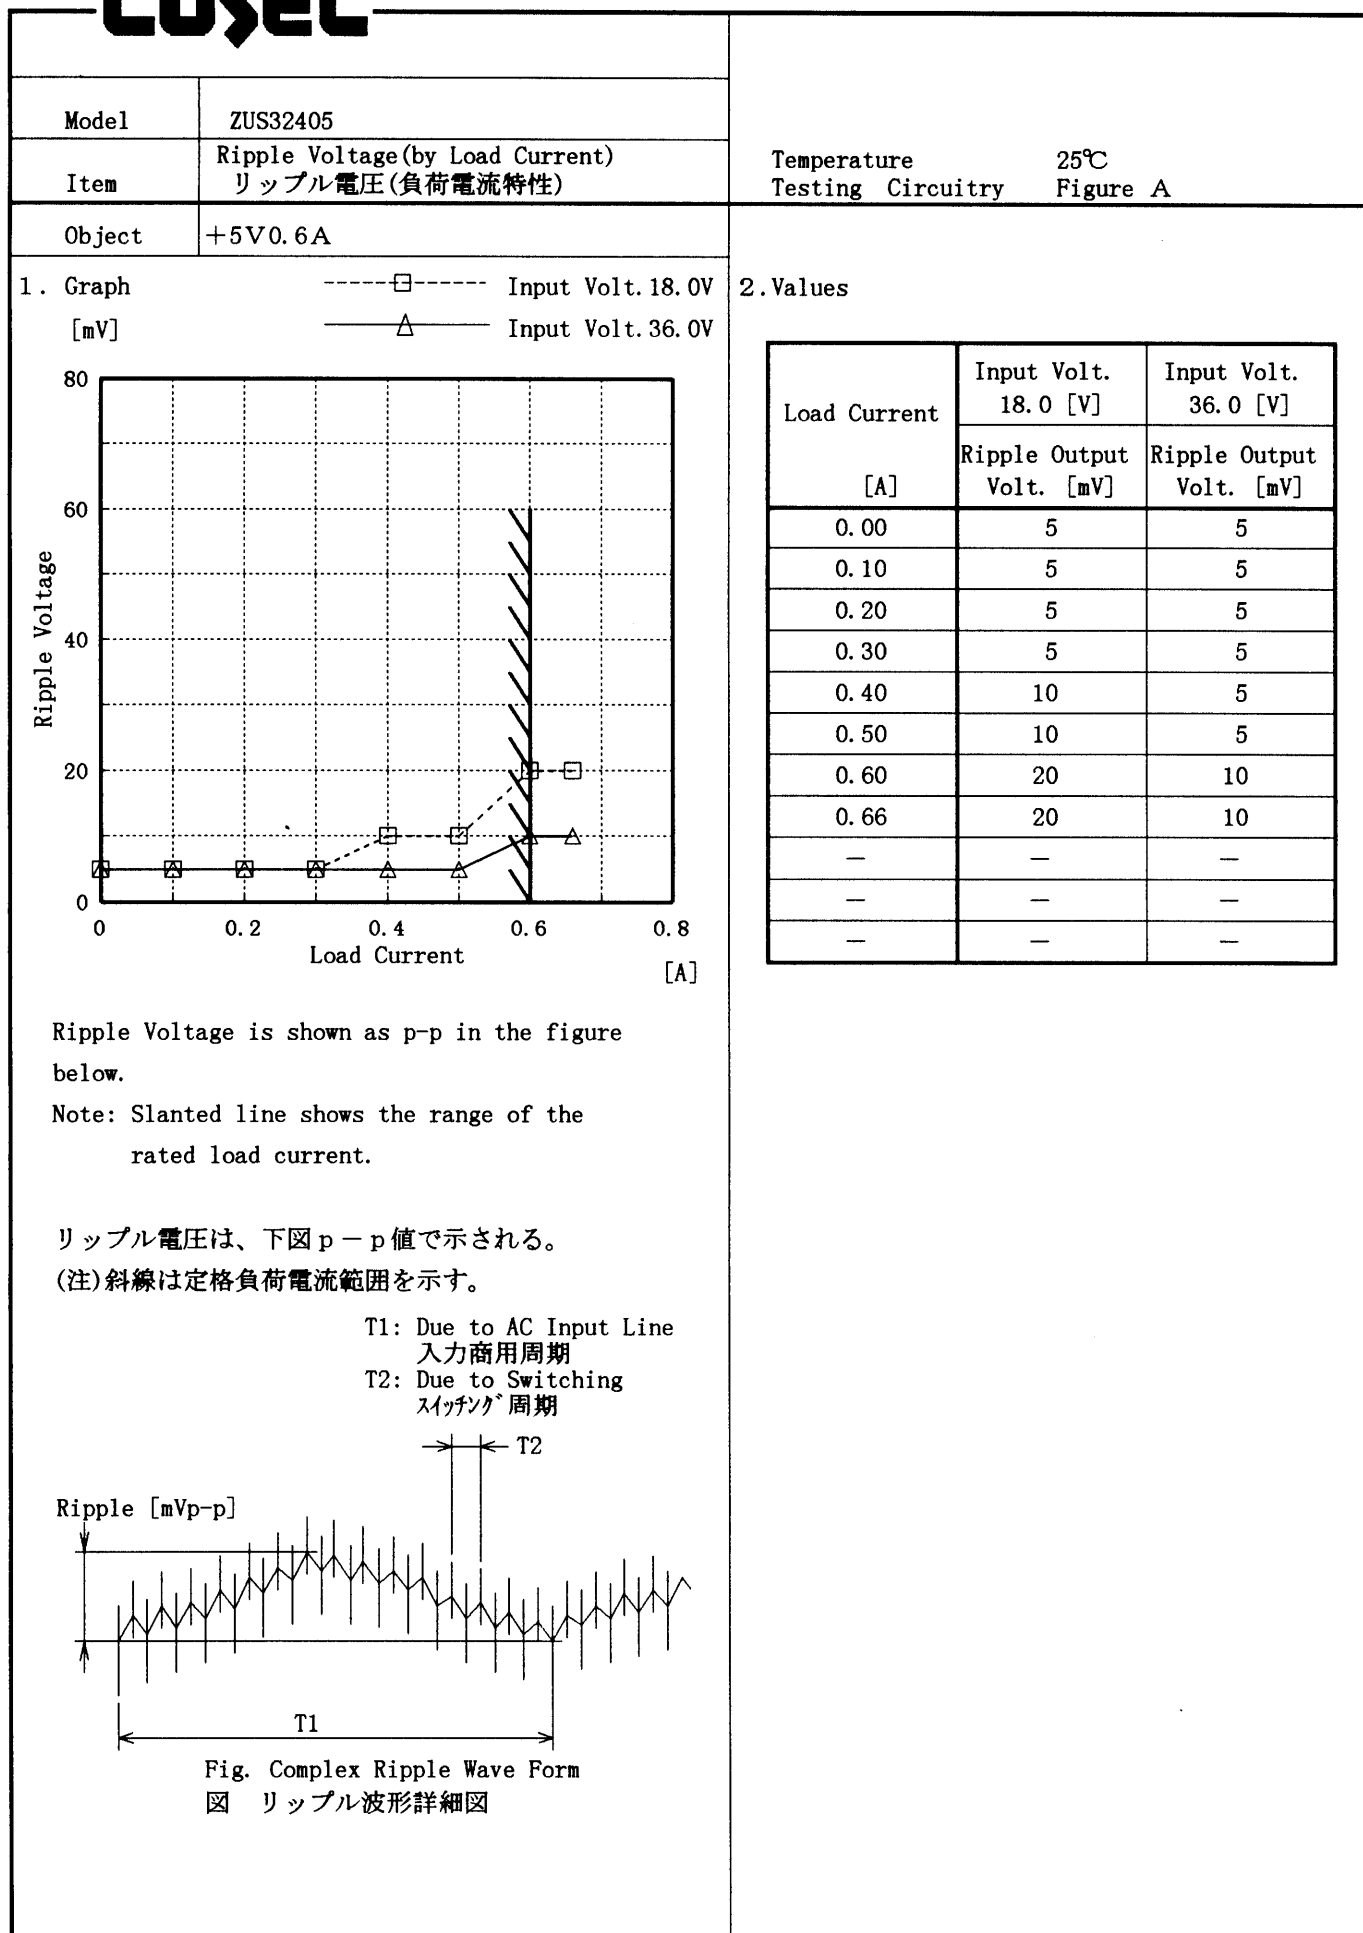

# COSEL

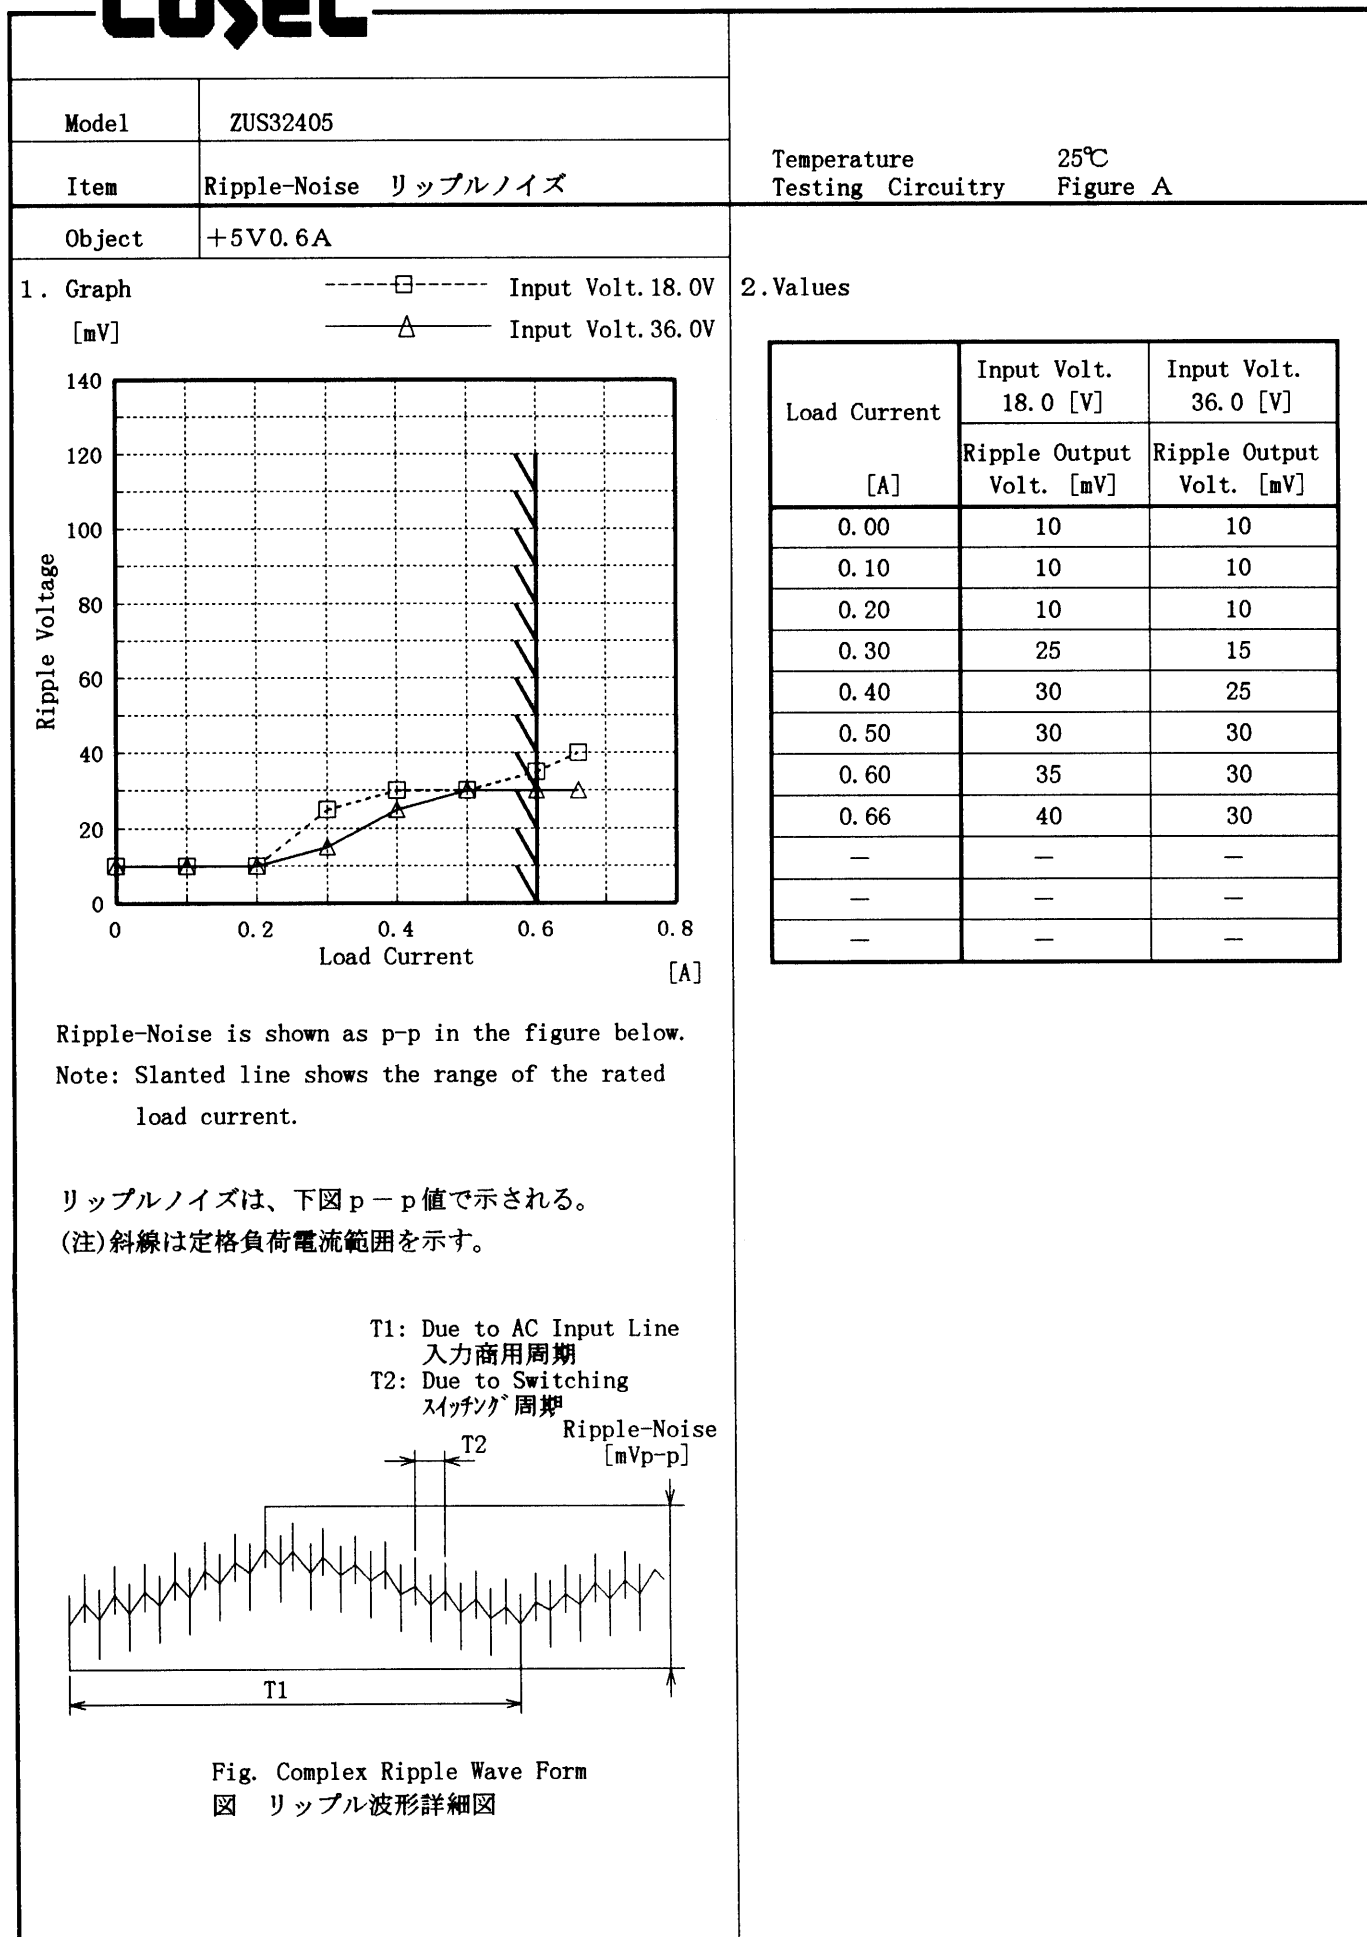

**COSEL**

Model		ZUS32405	Temperature25℃ Testing Circuitry Figure A																																																								
Item		Overcurrent Protection 過電流保護																																																									
Object		+5V0.6A																																																									
1. Graph			2. Values																																																								
<div><div>[V]</div><div><div>Output Voltage [V]</div><div>Load Current [A]</div></div></div>																																																											
<div>Note: Slanted line shows the range of the rated load current.</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>																																																											
			<table><tr><th rowspan="2">Output Voltage [V]</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr><tr><th>Load Current [A]</th><th>Load Current [A]</th><th>Load Current [A]</th></tr><tr><td>5.00</td><td>0.77</td><td>0.87</td><td>0.80</td></tr><tr><td>4.75</td><td>0.78</td><td>0.87</td><td>0.80</td></tr><tr><td>4.50</td><td>0.79</td><td>0.88</td><td>0.80</td></tr><tr><td>4.00</td><td>0.82</td><td>0.89</td><td>0.79</td></tr><tr><td>3.50</td><td>0.83</td><td>0.90</td><td>0.77</td></tr><tr><td>3.00</td><td>0.85</td><td>0.90</td><td>0.75</td></tr><tr><td>2.50</td><td>0.85</td><td>0.88</td><td>0.72</td></tr><tr><td>2.00</td><td>0.85</td><td>0.86</td><td>0.67</td></tr><tr><td>1.50</td><td>0.82</td><td>0.80</td><td>0.60</td></tr><tr><td>1.00</td><td>0.78</td><td>0.72</td><td>0.53</td></tr><tr><td>0.50</td><td>0.70</td><td>0.60</td><td>0.48</td></tr><tr><td>0.00</td><td>0.63</td><td>0.56</td><td>0.56</td></tr></table>		Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Load Current [A]	Load Current [A]	Load Current [A]	5.00	0.77	0.87	0.80	4.75	0.78	0.87	0.80	4.50	0.79	0.88	0.80	4.00	0.82	0.89	0.79	3.50	0.83	0.90	0.77	3.00	0.85	0.90	0.75	2.50	0.85	0.88	0.72	2.00	0.85	0.86	0.67	1.50	0.82	0.80	0.60	1.00	0.78	0.72	0.53	0.50	0.70	0.60	0.48	0.00	0.63	0.56	0.56
Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																								
	Load Current [A]	Load Current [A]	Load Current [A]																																																								
5.00	0.77	0.87	0.80																																																								
4.75	0.78	0.87	0.80																																																								
4.50	0.79	0.88	0.80																																																								
4.00	0.82	0.89	0.79																																																								
3.50	0.83	0.90	0.77																																																								
3.00	0.85	0.90	0.75																																																								
2.50	0.85	0.88	0.72																																																								
2.00	0.85	0.86	0.67																																																								
1.50	0.82	0.80	0.60																																																								
1.00	0.78	0.72	0.53																																																								
0.50	0.70	0.60	0.48																																																								
0.00	0.63	0.56	0.56																																																								



# COSEL

Model	ZUS32405	Temperature	25℃
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+5V0.6A		

Input Volt. 24.0 V



Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %



200 mV/div

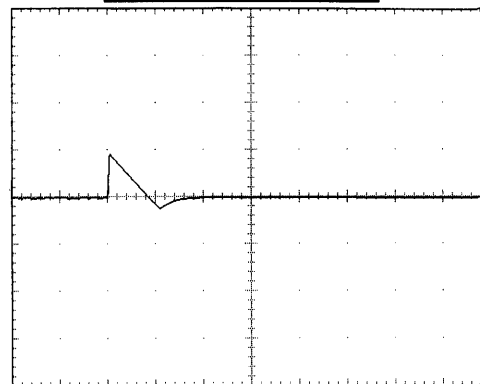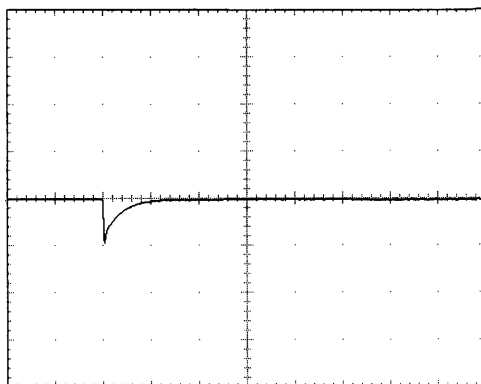

Min. Load ↔

Load 50 %



200 mV/div

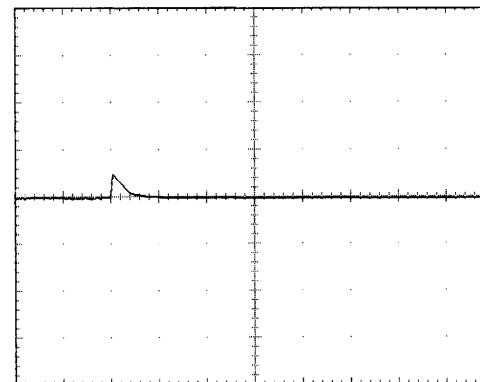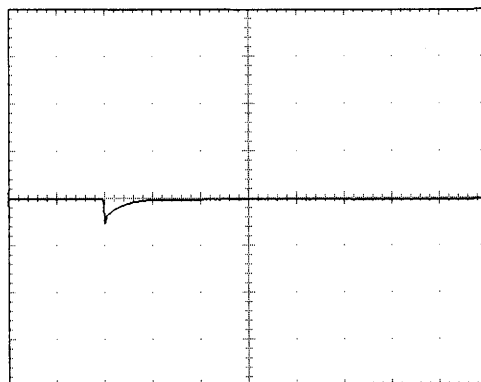

Load 50% ↔

Load 100 %

200 mV/div

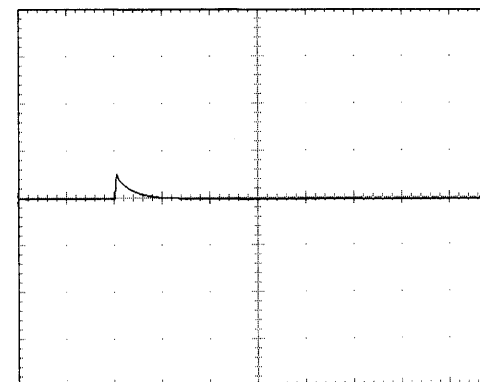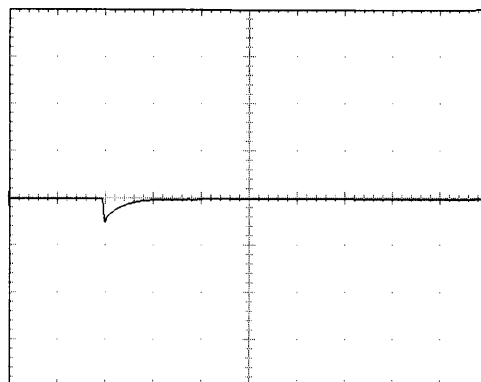


1 mS/div

**COSEL**

Model	ZUS32405	Temperature	25℃
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+5V0.6A		

## 1. Graph


Input Volt. 18.0 V

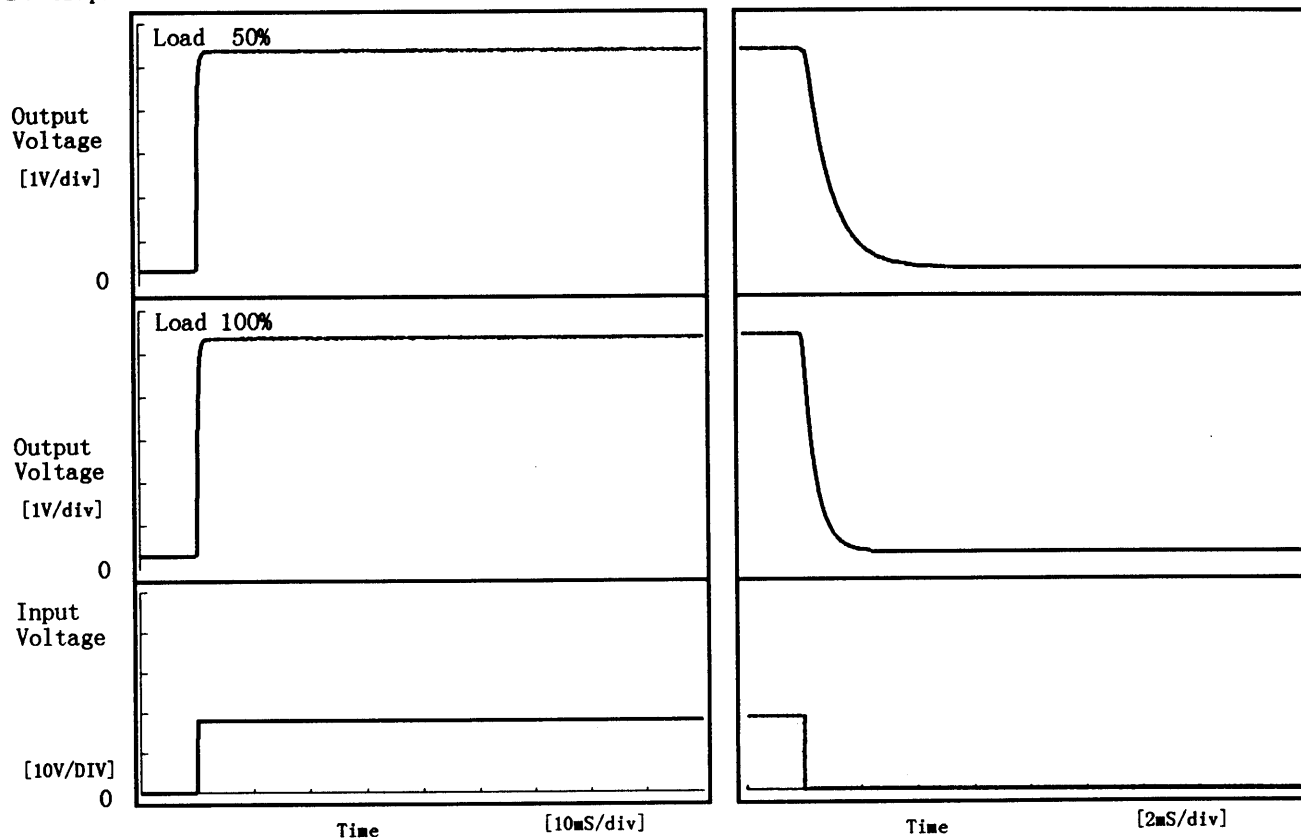

## 2. Values

[μS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.10	0.50	0.60	0.37	1.94
100 %	0.05	0.60	0.65	0.17	1.01

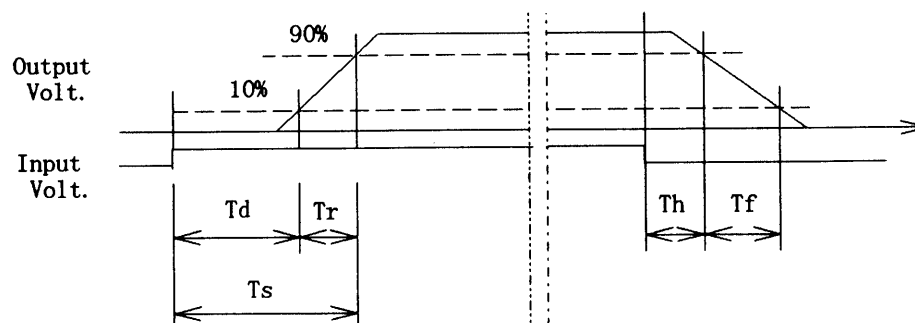

**COSEL**


Model	ZUS32405	Testing Circuitry Figure A																																																					
Item	Ambient Temperature Drift 周囲温度変動																																																						
Object	+5V0.6A																																																						
1. Graph		2. Values																																																					
<div> <div> <div>—△—</div> <div>Input Volt. 18.0V</div> </div> <div> <div>---□---</div> <div>Input Volt. 24.0V</div> </div> <div> <div>---○---</div> <div>Input Volt. 36.0V</div> </div> </div> <div> <div>Output Voltage [V]</div> <div> <div>Ambient Temperature [°C]</div> <div>Load 100%</div> </div> </div> <div> <div>Note: Slanted line shows the range of the rated ambient temperature.</div> <div>(注) 斜線は定格周囲温度範囲を示す。</div> </div>		<table> <tr> <th>Temperature</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr> <tr> <th>[°C]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> <tr><td>-30</td><td>5.059</td><td>5.059</td><td>5.060</td></tr> <tr><td>-20</td><td>5.061</td><td>5.061</td><td>5.061</td></tr> <tr><td>-10</td><td>5.062</td><td>5.062</td><td>5.062</td></tr> <tr><td>0</td><td>5.063</td><td>5.063</td><td>5.063</td></tr> <tr><td>10</td><td>5.064</td><td>5.064</td><td>5.064</td></tr> <tr><td>25</td><td>5.064</td><td>5.064</td><td>5.064</td></tr> <tr><td>30</td><td>5.064</td><td>5.064</td><td>5.063</td></tr> <tr><td>40</td><td>5.062</td><td>5.062</td><td>5.062</td></tr> <tr><td>55</td><td>5.059</td><td>5.059</td><td>5.058</td></tr> <tr><td>60</td><td>5.057</td><td>5.057</td><td>5.056</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Temperature	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-30	5.059	5.059	5.060	-20	5.061	5.061	5.061	-10	5.062	5.062	5.062	0	5.063	5.063	5.063	10	5.064	5.064	5.064	25	5.064	5.064	5.064	30	5.064	5.064	5.063	40	5.062	5.062	5.062	55	5.059	5.059	5.058	60	5.057	5.057	5.056	—	—	—	—
Temperature	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																				
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																				
-30	5.059	5.059	5.060																																																				
-20	5.061	5.061	5.061																																																				
-10	5.062	5.062	5.062																																																				
0	5.063	5.063	5.063																																																				
10	5.064	5.064	5.064																																																				
25	5.064	5.064	5.064																																																				
30	5.064	5.064	5.063																																																				
40	5.062	5.062	5.062																																																				
55	5.059	5.059	5.058																																																				
60	5.057	5.057	5.056																																																				
—	—	—	—																																																				

# COSEL

Model	ZUS32405
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+5V0.6A

Testing Circuitry Figure A

1. Graph
- [V]
- Load 50%
- △----- Load 100%

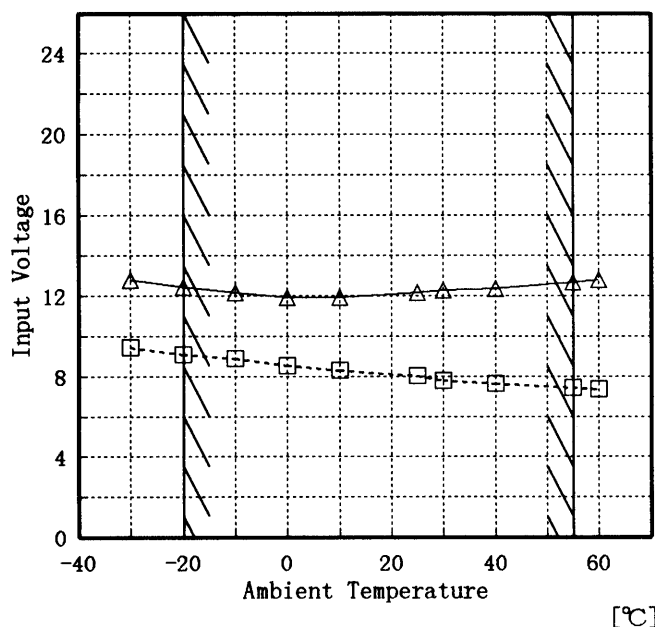

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values


Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	9.5	12.8
-20	9.1	12.4
-10	8.9	12.2
0	8.5	11.9
10	8.3	11.9
25	8.0	12.2
30	7.8	12.3
40	7.7	12.4
55	7.4	12.7
60	7.4	12.8
—	—	—

# COSEL

Model	ZUS32405
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+5V0.6A

Testing Circuitry Figure A

## 1. Graph

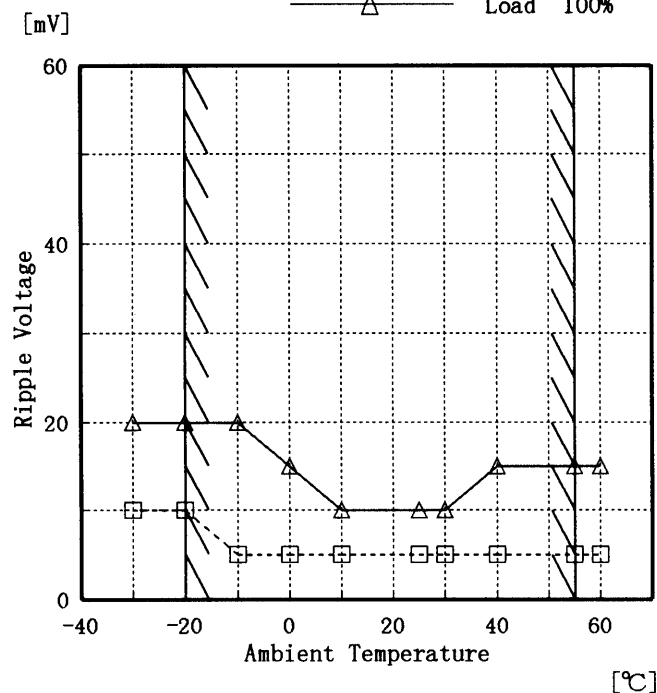


Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

## 2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-30	10	20
-20	10	20
-10	5	20
0	5	15
10	5	10
25	5	10
30	5	10
40	5	15
55	5	15
60	5	15
—	—	—

# COSEL

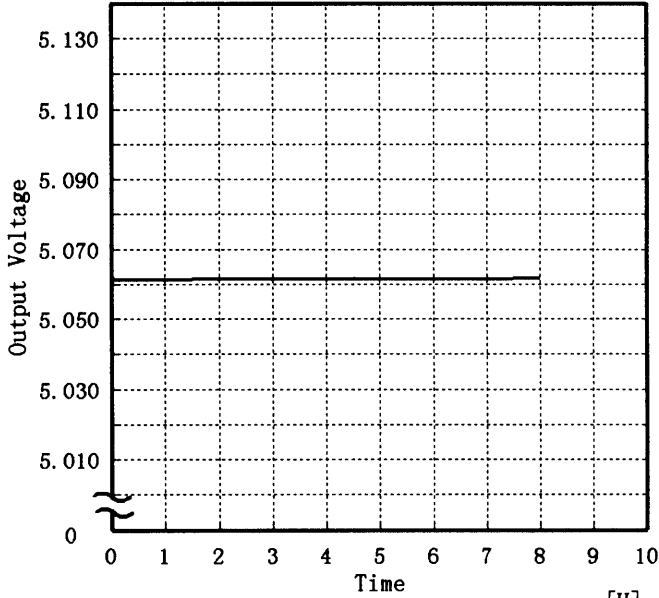Model	ZUS32405	Temperature	25 ℃																						
Item	Time Lapse Drift 経時ドリフト	Testing Circuitry	Figure A																						
Object	+5V0.6A																								
1. Graph		2.Values																							
<div>[V]</div> <div></div> <div>Output Voltage</div> <div>Time</div> <div>[H]</div> <div>Input Volt. 24V</div> <div>Load 100%</div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>5.063</td></tr><tr><td>0.5</td><td>5.061</td></tr><tr><td>1.0</td><td>5.061</td></tr><tr><td>2.0</td><td>5.061</td></tr><tr><td>3.0</td><td>5.061</td></tr><tr><td>4.0</td><td>5.062</td></tr><tr><td>5.0</td><td>5.062</td></tr><tr><td>6.0</td><td>5.062</td></tr><tr><td>7.0</td><td>5.062</td></tr><tr><td>8.0</td><td>5.062</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	5.063	0.5	5.061	1.0	5.061	2.0	5.061	3.0	5.061	4.0	5.062	5.0	5.062	6.0	5.062	7.0	5.062	8.0	5.062
Time since start [H]	Output Voltage [V]																								
0.0	5.063																								
0.5	5.061																								
1.0	5.061																								
2.0	5.061																								
3.0	5.061																								
4.0	5.062																								
5.0	5.062																								
6.0	5.062																								
7.0	5.062																								
8.0	5.062																								

# COSEL

Model	ZUS32405	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+5V0.6A	

## Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 18.0~36.0 V

Load Current : 0.0~0.6 A

\* Output Voltage Accuracy =  $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ratio) =  $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

## 定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 18.0~36.0 V

負荷電流 : 0.0~0.6 A

\* 定電圧精度(変動値) =  $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

\* 定電圧精度(変動率) =  $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ratio) [%]
Maximum Voltage	25	36.0	0.0	5.070	±6	±0.2
Minimum Voltage	55	36.0	0.6	5.058		

# COSEL

COSEL

Model	ZUS32405		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+5V0.6A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①,② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で－１０℃に冷却しておき、約１時間後に恒温槽から取り出し、室温２５℃、湿度４０％RHの状態におき結露させ、その電気的特性の測定を３度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	5.037	5	15
	2	5.036	5	15
	3	5.036	5	15
Load 100 %	1	5.035	10	25
	2	5.034	10	25
	3	5.035	10	25

Input Volt. 24.0 V



**COSEL**

