



TEST DATA OF ZUS62405

(24.0V INPUT)

Regulated DC Power Supply

Date : Sep. 23. 1996

Approved by : T. Sugimori
Design Manager

Prepared by : H. Ise.
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	5
リップルノイズ	
6. Overcurrent Protection	6
過電流保護	
7. Dynamic Load Responce	7
動的負荷変動	
8. Rise and Fall Time	8
立上り、立下がり時間	
9. Ambient Temperature Drift	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	12
経時ドリフト	
13. Output Voltage Accuracy	13
定電圧精度	
14. Condensation	14
結露特性	
15. Figure of Testing Circuitry	15
測定回路図	

(Final Page 15)

COSEL

Model		ZUS62405	Temperature		25℃																																							
Item		Line Regulation 静的入力変動	Testing Circuitry		Figure A																																							
Object		+5V1.2A																																										
1. Graph			2. Values																																									
<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div><div><div>[V]</div><div><div>Output Voltage</div><div>Input Voltage [V]</div></div></div></div>			<table><tr><th>Input Voltage [V]</th><th>Load 50% Output Volt. [V]</th><th>Load 100% Output Volt. [V]</th></tr><tr><td>16.0</td><td>5.117</td><td>5.116</td></tr><tr><td>18.0</td><td>5.118</td><td>5.116</td></tr><tr><td>20.0</td><td>5.118</td><td>5.116</td></tr><tr><td>24.0</td><td>5.118</td><td>5.116</td></tr><tr><td>30.0</td><td>5.118</td><td>5.116</td></tr><tr><td>36.0</td><td>5.118</td><td>5.116</td></tr><tr><td>40.0</td><td>5.118</td><td>5.116</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>			Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	16.0	5.117	5.116	18.0	5.118	5.116	20.0	5.118	5.116	24.0	5.118	5.116	30.0	5.118	5.116	36.0	5.118	5.116	40.0	5.118	5.116	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																										
16.0	5.117	5.116																																										
18.0	5.118	5.116																																										
20.0	5.118	5.116																																										
24.0	5.118	5.116																																										
30.0	5.118	5.116																																										
36.0	5.118	5.116																																										
40.0	5.118	5.116																																										
—	—	—																																										
—	—	—																																										
—	—	—																																										
—	—	—																																										
—	—	—																																										
<div>Note: Slanted line shows the range of the rated input voltage.</div> <div>(注)斜線は定格入力電圧範囲を示す。</div>																																												

COSEL


Model ZUS62405

Item Efficiency 効率

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph

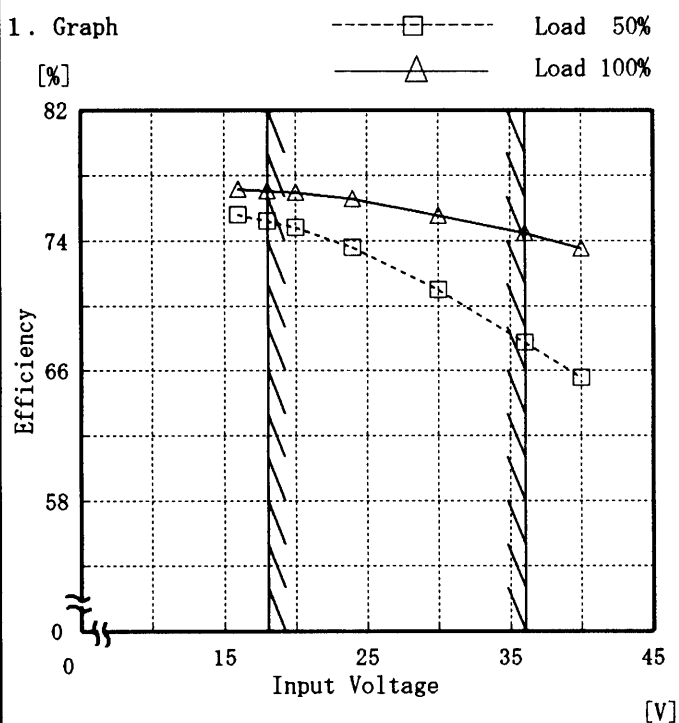


Note: Slanted line shows the range of the rated input voltage.


(注) 斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
16.0	75.6	77.1
18.0	75.2	77.1
20.0	74.8	76.9
24.0	73.6	76.6
30.0	71.0	75.5
36.0	67.8	74.5
40.0	65.5	73.5
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

COSEL

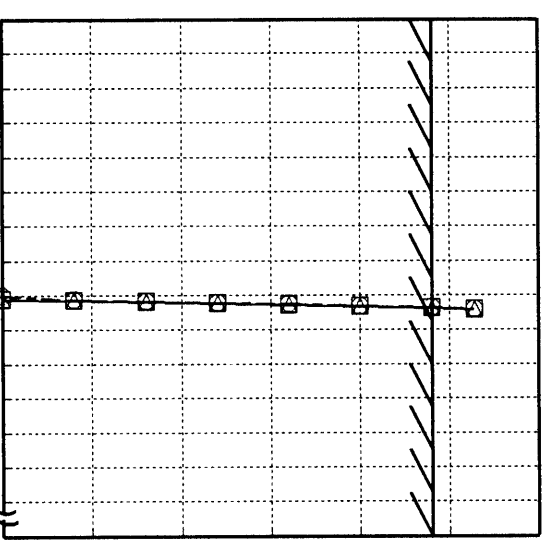Model		ZUS62405		Temperature		25℃																																														
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																														
Object		+5V1.2A																																																		
1. Graph		<div><div>△</div> Input Volt. 18.0V</div> <div><div>□</div> Input Volt. 24.0V</div> <div><div>○</div> Input Volt. 36.0V</div>		2. Values																																																
<div><div><div>Output Voltage</div><div>[V]</div></div><div><div><div>5.190</div><div>5.170</div><div>5.150</div><div>5.130</div><div>5.110</div><div>5.090</div><div>5.070</div><div>0</div></div><div><div>0</div><div>0.5</div><div>1</div><div>1.5</div></div><div><div>Load Current</div><div>[A]</div></div></div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.00</td><td>5.119</td><td>5.119</td><td>5.120</td></tr><tr><td>0.20</td><td>5.119</td><td>5.119</td><td>5.119</td></tr><tr><td>0.40</td><td>5.118</td><td>5.118</td><td>5.118</td></tr><tr><td>0.60</td><td>5.118</td><td>5.118</td><td>5.118</td></tr><tr><td>0.80</td><td>5.117</td><td>5.118</td><td>5.118</td></tr><tr><td>1.00</td><td>5.117</td><td>5.117</td><td>5.117</td></tr><tr><td>1.20</td><td>5.116</td><td>5.116</td><td>5.117</td></tr><tr><td>1.20</td><td>5.116</td><td>5.117</td><td>5.117</td></tr><tr><td>1.32</td><td>5.116</td><td>5.116</td><td>5.116</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	5.119	5.119	5.120	0.20	5.119	5.119	5.119	0.40	5.118	5.118	5.118	0.60	5.118	5.118	5.118	0.80	5.117	5.118	5.118	1.00	5.117	5.117	5.117	1.20	5.116	5.116	5.117	1.20	5.116	5.117	5.117	1.32	5.116	5.116	5.116	—	—	—	—
Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																	
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																	
0.00	5.119	5.119	5.120																																																	
0.20	5.119	5.119	5.119																																																	
0.40	5.118	5.118	5.118																																																	
0.60	5.118	5.118	5.118																																																	
0.80	5.117	5.118	5.118																																																	
1.00	5.117	5.117	5.117																																																	
1.20	5.116	5.116	5.117																																																	
1.20	5.116	5.117	5.117																																																	
1.32	5.116	5.116	5.116																																																	
—	—	—	—																																																	
Note: Slanted line shows the range of the rated load current.																																																				
(注)斜線は定格負荷電流範囲を示す。																																																				

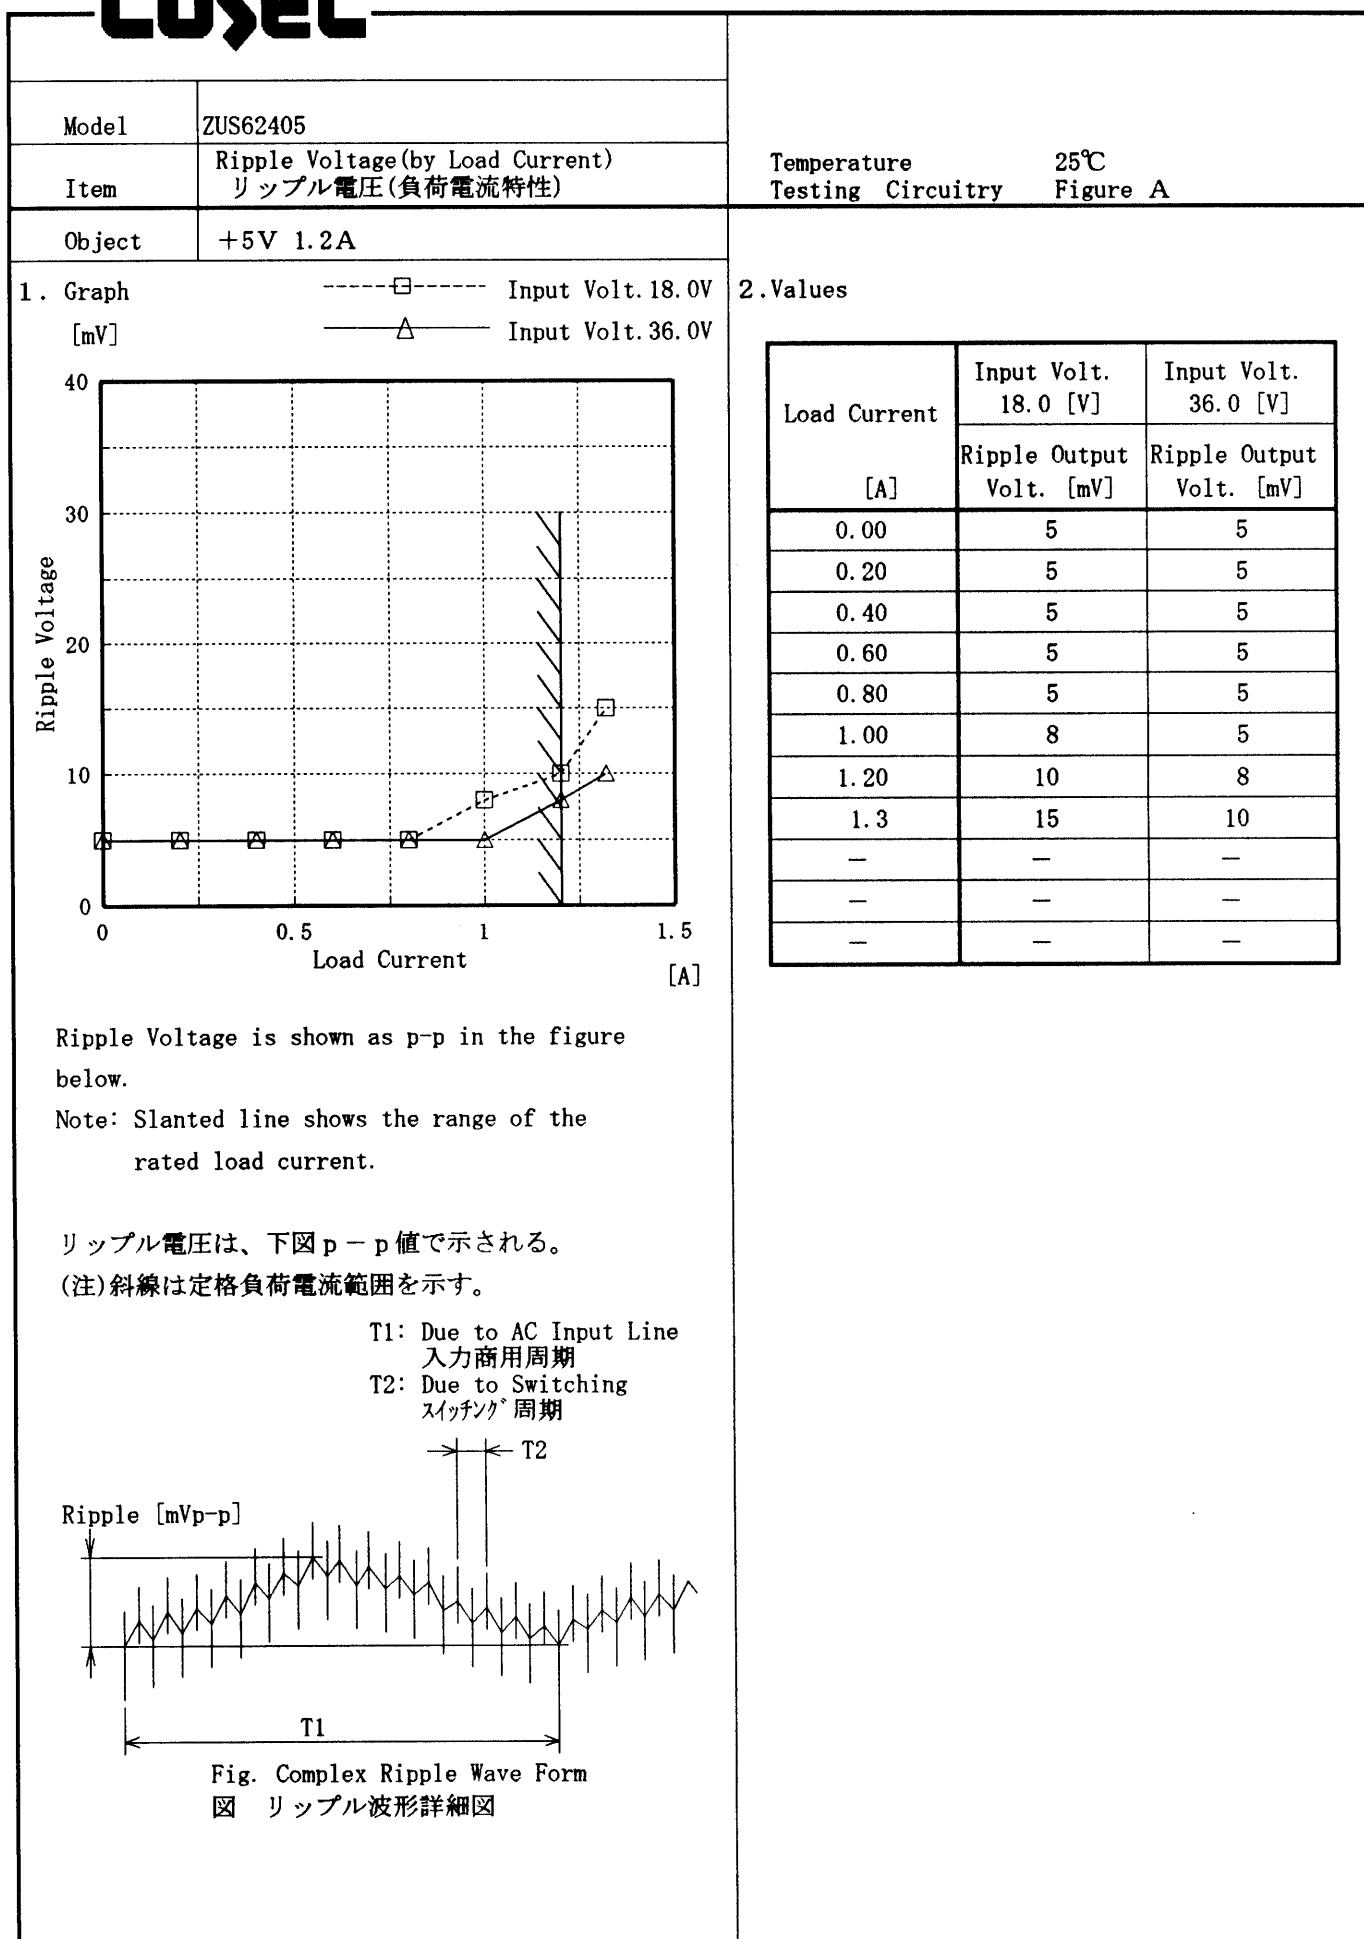COSEL

COSEL


Model ZUS62405

Item Ripple-Noise リップルノイズ

Object +5V1.2A

Temperature 25°C
Testing Circuitry Figure A

1. Graph
- Input Volt. 18.0V
 -----△----- Input Volt. 36.0V

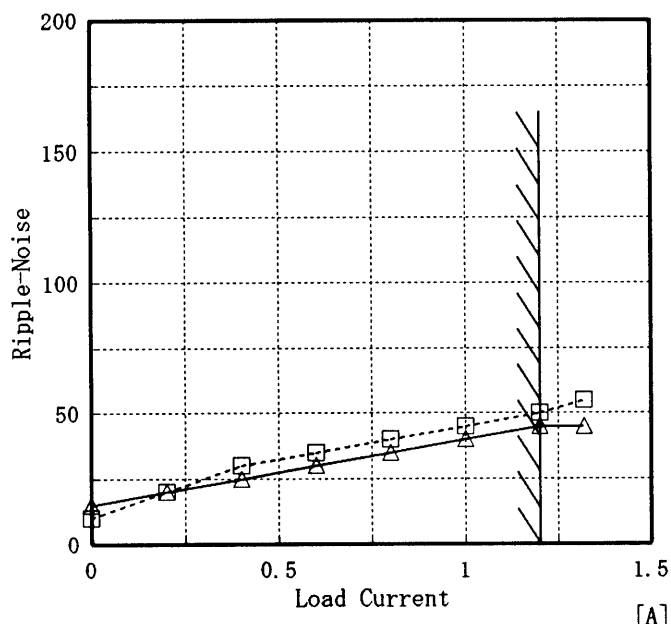

Ripple-Noise is shown as p-p in the figure below.
 Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
 入力商用周期
 T2: Due to Switching
 スイッチング周期

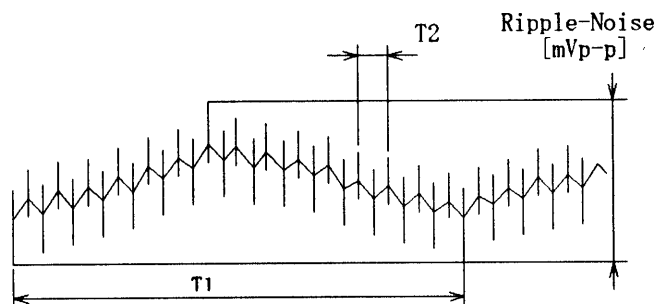


Fig. Complex Ripple Wave Form
 図 リップル波形詳細図

2. Values

Load current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.00	10	15
0.20	20	20
0.40	30	25
0.60	35	30
0.80	40	35
1.00	45	40
1.20	50	45
1.32	55	45
—	—	—
—	—	—
—	—	—

COSEL

Model		ZUS62405	Temperature25℃ Testing Circuitry Figure A																																																					
Item		Overcurrent Protection 過電流保護																																																						
Object		+5V1.2A																																																						
1. Graph			2. Values																																																					
<div><div>[V]</div><div><div>Output Voltage [V]</div><div>Load Current [A]</div></div></div>																																																								
<div>Note: Slanted line shows the range of the rated load current.</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>																																																								
			<table><tr><th>Output Voltage [V]</th><th>Input Volt. 18.0[V] Load Curr-ent [A]</th><th>Input Volt. 24.0[V] Load Curr-ent [A]</th><th>Input Volt. 36.0[V] Load Curr-ent [A]</th></tr><tr><td>5.00</td><td>1.73</td><td>1.92</td><td>1.99</td></tr><tr><td>4.75</td><td>1.76</td><td>1.95</td><td>2.01</td></tr><tr><td>4.50</td><td>1.80</td><td>1.98</td><td>2.03</td></tr><tr><td>4.00</td><td>1.86</td><td>2.03</td><td>2.05</td></tr><tr><td>3.50</td><td>1.93</td><td>2.07</td><td>2.06</td></tr><tr><td>3.00</td><td>1.99</td><td>2.11</td><td>2.06</td></tr><tr><td>2.50</td><td>2.05</td><td>2.14</td><td>2.04</td></tr><tr><td>2.00</td><td>2.10</td><td>2.16</td><td>2.01</td></tr><tr><td>1.50</td><td>2.14</td><td>2.15</td><td>1.95</td></tr><tr><td>1.00</td><td>2.17</td><td>2.13</td><td>1.87</td></tr><tr><td>0.50</td><td>2.20</td><td>2.11</td><td>1.80</td></tr><tr><td>0.00</td><td>2.36</td><td>2.39</td><td>2.11</td></tr></table>		Output Voltage [V]	Input Volt. 18.0[V] Load Curr-ent [A]	Input Volt. 24.0[V] Load Curr-ent [A]	Input Volt. 36.0[V] Load Curr-ent [A]	5.00	1.73	1.92	1.99	4.75	1.76	1.95	2.01	4.50	1.80	1.98	2.03	4.00	1.86	2.03	2.05	3.50	1.93	2.07	2.06	3.00	1.99	2.11	2.06	2.50	2.05	2.14	2.04	2.00	2.10	2.16	2.01	1.50	2.14	2.15	1.95	1.00	2.17	2.13	1.87	0.50	2.20	2.11	1.80	0.00	2.36	2.39	2.11
Output Voltage [V]	Input Volt. 18.0[V] Load Curr-ent [A]	Input Volt. 24.0[V] Load Curr-ent [A]	Input Volt. 36.0[V] Load Curr-ent [A]																																																					
5.00	1.73	1.92	1.99																																																					
4.75	1.76	1.95	2.01																																																					
4.50	1.80	1.98	2.03																																																					
4.00	1.86	2.03	2.05																																																					
3.50	1.93	2.07	2.06																																																					
3.00	1.99	2.11	2.06																																																					
2.50	2.05	2.14	2.04																																																					
2.00	2.10	2.16	2.01																																																					
1.50	2.14	2.15	1.95																																																					
1.00	2.17	2.13	1.87																																																					
0.50	2.20	2.11	1.80																																																					
0.00	2.36	2.39	2.11																																																					

COSEL

Model	ZUS62405	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Response 動的負荷変動	
Object	+5V1.2A	

Input Volt. 24.0 V


Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %


200 mV/div

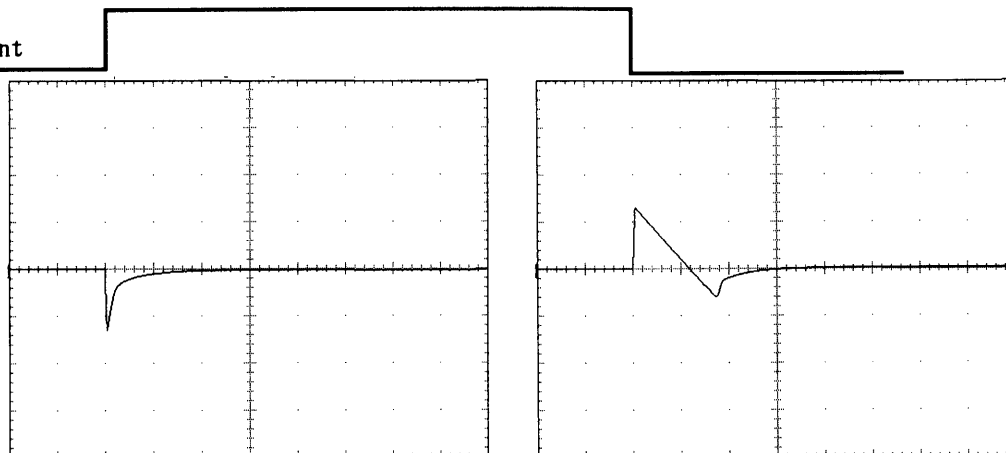

Min. Load ↔

Load 50 %


200 mV/div

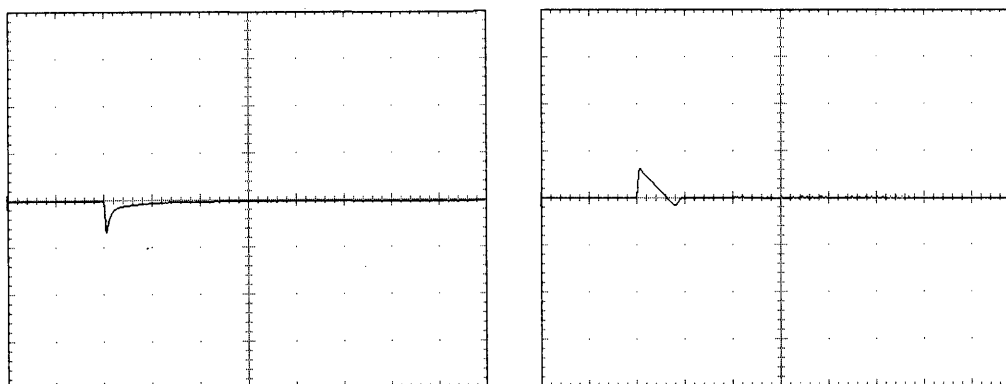

Load 50% ↔

Load 100 %

200 mV/div

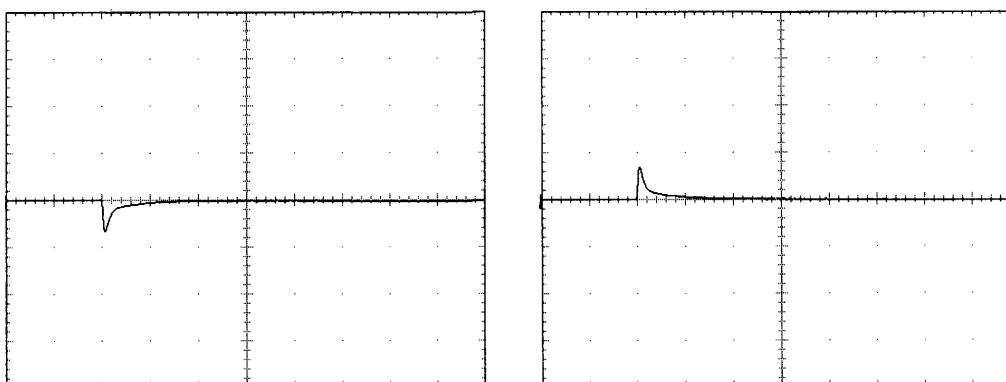


1 mS/div

COSEL

Model	ZUS62405	Temperature 25°C Testing Circuitry Figure A
Item	Rise and Fall Time 立上り、立下り時間	
Object	+5V1.2A	

1. Graph


Input Volt. 18.0 V

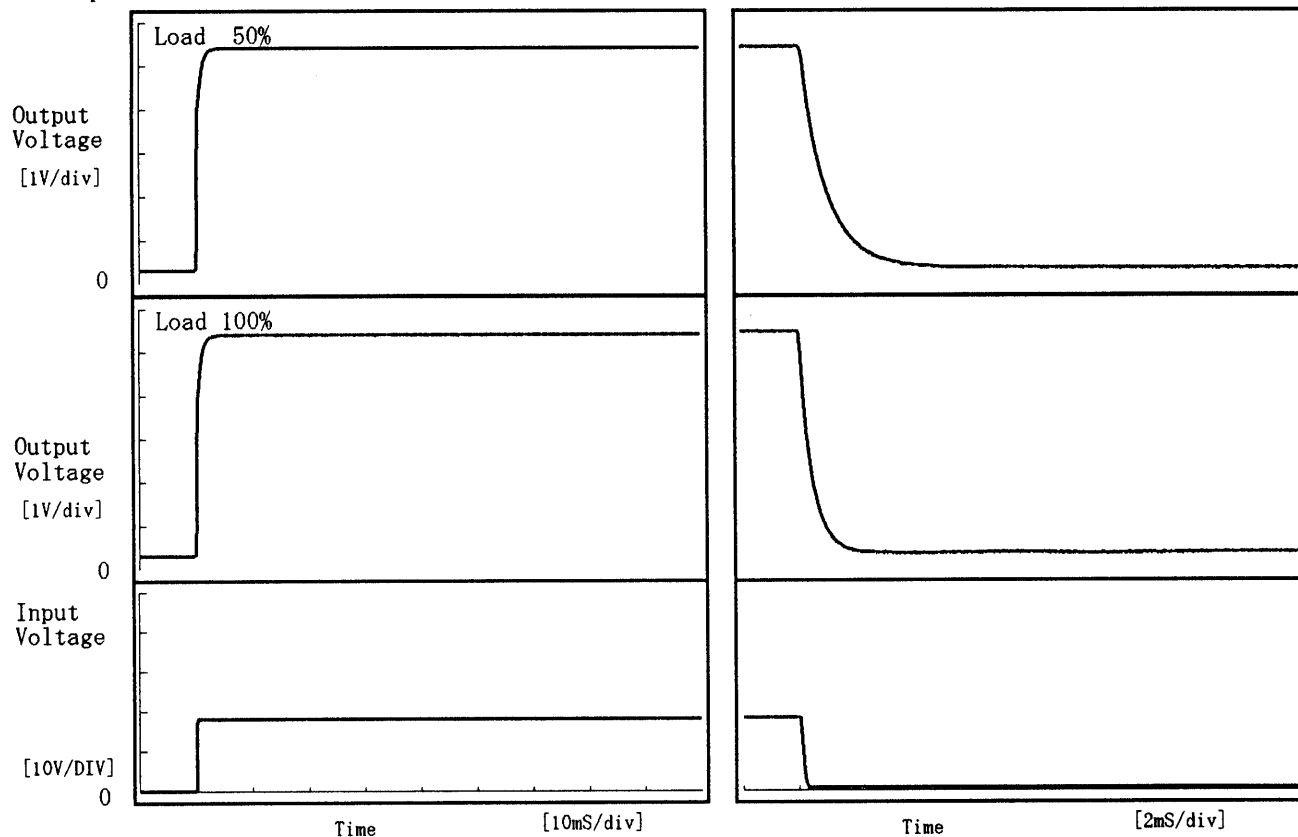

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.05	0.90	0.95	0.25	2.13
100 %	0.05	0.90	0.95	0.12	1.06

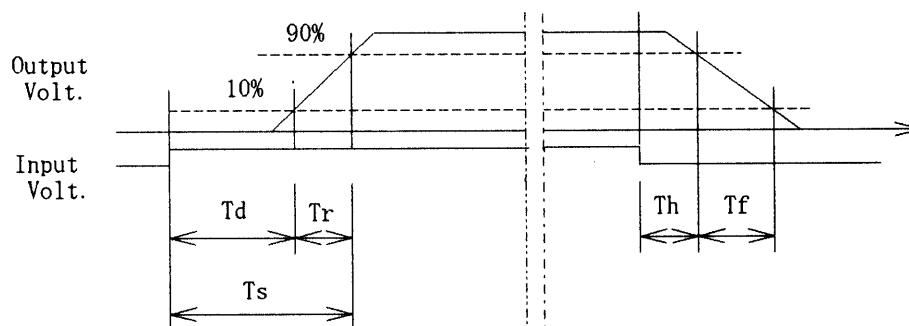

COSEL

Model		ZUS62405	Testing Circuitry Figure A																																															
Item		Ambient Temperature Drift 周囲温度変動																																																
Object		+5V1.2A																																																
1. Graph		<div> <div> <div>△</div> <div>Input Volt. 18.0V</div> </div> <div> <div>□</div> <div>Input Volt. 24.0V</div> </div> <div> <div>○</div> <div>Input Volt. 36.0V</div> </div> </div> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>	2. Values																																															
		<table> <tr> <th>Temperature [°C]</th><th>Input Volt. 18.0[V] Output Volt. [V]</th><th>Input Volt. 24.0[V] Output Volt. [V]</th><th>Input Volt. 36.0[V] Output Volt. [V]</th></tr> <tr><td>-30</td><td>5.109</td><td>5.109</td><td>5.109</td></tr> <tr><td>-20</td><td>5.110</td><td>5.110</td><td>5.110</td></tr> <tr><td>-10</td><td>5.111</td><td>5.111</td><td>5.111</td></tr> <tr><td>0</td><td>5.112</td><td>5.112</td><td>5.112</td></tr> <tr><td>10</td><td>5.113</td><td>5.113</td><td>5.114</td></tr> <tr><td>25</td><td>5.115</td><td>5.116</td><td>5.116</td></tr> <tr><td>30</td><td>5.116</td><td>5.117</td><td>5.117</td></tr> <tr><td>40</td><td>5.117</td><td>5.117</td><td>5.117</td></tr> <tr><td>55</td><td>5.117</td><td>5.117</td><td>5.117</td></tr> <tr><td>60</td><td>5.117</td><td>5.117</td><td>5.117</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Temperature [°C]	Input Volt. 18.0[V] Output Volt. [V]	Input Volt. 24.0[V] Output Volt. [V]	Input Volt. 36.0[V] Output Volt. [V]	-30	5.109	5.109	5.109	-20	5.110	5.110	5.110	-10	5.111	5.111	5.111	0	5.112	5.112	5.112	10	5.113	5.113	5.114	25	5.115	5.116	5.116	30	5.116	5.117	5.117	40	5.117	5.117	5.117	55	5.117	5.117	5.117	60	5.117	5.117	5.117	—	—	—
Temperature [°C]	Input Volt. 18.0[V] Output Volt. [V]	Input Volt. 24.0[V] Output Volt. [V]	Input Volt. 36.0[V] Output Volt. [V]																																															
-30	5.109	5.109	5.109																																															
-20	5.110	5.110	5.110																																															
-10	5.111	5.111	5.111																																															
0	5.112	5.112	5.112																																															
10	5.113	5.113	5.114																																															
25	5.115	5.116	5.116																																															
30	5.116	5.117	5.117																																															
40	5.117	5.117	5.117																																															
55	5.117	5.117	5.117																																															
60	5.117	5.117	5.117																																															
—	—	—	—																																															

COSEL

Model ZUS62405

Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧


Object +5V1.2A

Testing Circuitry Figure A

1. Graph

[V]

-----□----- Load 50%
 -----△----- Load 100%

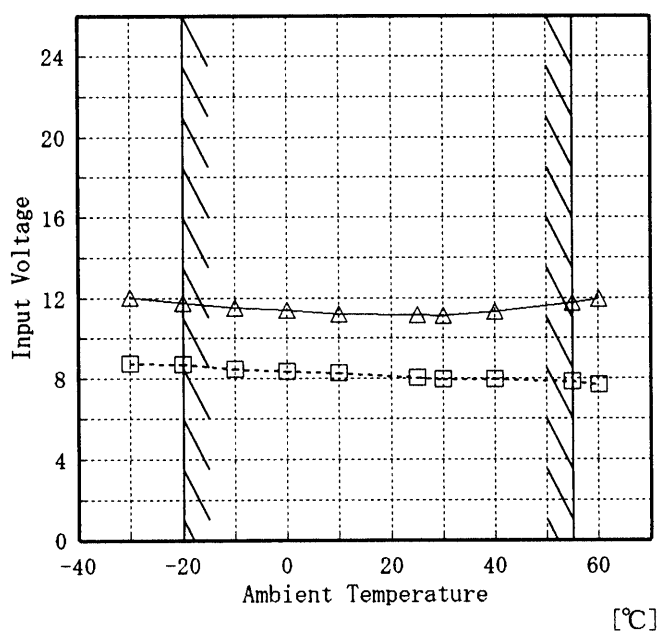

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	8.8	12.0
-20	8.7	11.8
-10	8.5	11.5
0	8.4	11.4
10	8.3	11.2
25	8.1	11.2
30	8.0	11.1
40	8.0	11.3
55	7.9	11.7
60	7.7	11.9
—	—	—

COSEL

Model ZUS62405		Testing Circuitry Figure A																																						
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																							
Object	+5V1.2A																																							
<p>1. Graph</p> <p>-----□----- Load 50%</p> <p>-----△----- Load 100%</p> <p>[mV]</p> <p>Ripple Voltage</p> <p>Ambient Temperature [°C]</p> <p>Input Volt. 18.0 V</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. [°C]</th><th>Load 50%</th><th>Load 100%</th></tr> <tr> <th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr> </thead> <tbody> <tr><td>-30</td><td>10</td><td>40</td></tr> <tr><td>-20</td><td>10</td><td>30</td></tr> <tr><td>-10</td><td>5</td><td>25</td></tr> <tr><td>0</td><td>5</td><td>20</td></tr> <tr><td>10</td><td>5</td><td>20</td></tr> <tr><td>25</td><td>5</td><td>20</td></tr> <tr><td>30</td><td>5</td><td>20</td></tr> <tr><td>40</td><td>5</td><td>20</td></tr> <tr><td>55</td><td>5</td><td>20</td></tr> <tr><td>60</td><td>5</td><td>20</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Load 50%	Load 100%	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	-30	10	40	-20	10	30	-10	5	25	0	5	20	10	5	20	25	5	20	30	5	20	40	5	20	55	5	20	60	5	20	—	—	—
Ambient Temp. [°C]	Load 50%	Load 100%																																						
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																						
-30	10	40																																						
-20	10	30																																						
-10	5	25																																						
0	5	20																																						
10	5	20																																						
25	5	20																																						
30	5	20																																						
40	5	20																																						
55	5	20																																						
60	5	20																																						
—	—	—																																						

COSEL

COSEL																									
Model	ZUS62405																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25 ℃																						
Object	+5V1.2A	Testing Circuitry	Figure A																						
1. Graph		2.Values																							
<p>[V]</p> <p>Output Voltage</p> <p>Time</p> <p>[H]</p> <p>Input Volt. 24V</p> <p>Load 100%</p>		<table><thead><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr></thead><tbody><tr><td>0.0</td><td>5.115</td></tr><tr><td>0.5</td><td>5.115</td></tr><tr><td>1.0</td><td>5.116</td></tr><tr><td>2.0</td><td>5.115</td></tr><tr><td>3.0</td><td>5.115</td></tr><tr><td>4.0</td><td>5.115</td></tr><tr><td>5.0</td><td>5.115</td></tr><tr><td>6.0</td><td>5.115</td></tr><tr><td>7.0</td><td>5.115</td></tr><tr><td>8.0</td><td>5.115</td></tr></tbody></table>		Time since start [H]	Output Voltage [V]	0.0	5.115	0.5	5.115	1.0	5.116	2.0	5.115	3.0	5.115	4.0	5.115	5.0	5.115	6.0	5.115	7.0	5.115	8.0	5.115
Time since start [H]	Output Voltage [V]																								
0.0	5.115																								
0.5	5.115																								
1.0	5.116																								
2.0	5.115																								
3.0	5.115																								
4.0	5.115																								
5.0	5.115																								
6.0	5.115																								
7.0	5.115																								
8.0	5.115																								

COSEL

Model		ZUS62405	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+5V1.2A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 18.0~36.0 V

Load Current : 0.0~1.2 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 18.0~36.0 V

負荷電流 : 0.0~1.2 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	55	36.0	0.0	5.122	±6	±0.2
Minimum Voltage	-20	18.0	1.2	5.110		

COSEL

LOREL

Model	ZUS62405
Item	Condensation 結露特性
Object	+5V 1.2A

Testing Circuitry Figure A

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 26℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温26℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	5.113	5	40
	2	5.114	5	40
	3	5.113	5	35
Load 100 %	1	5.111	20	60
	2	5.111	20	60
	3	5.110	20	55

Input Volt. 24.0 V

COSEL

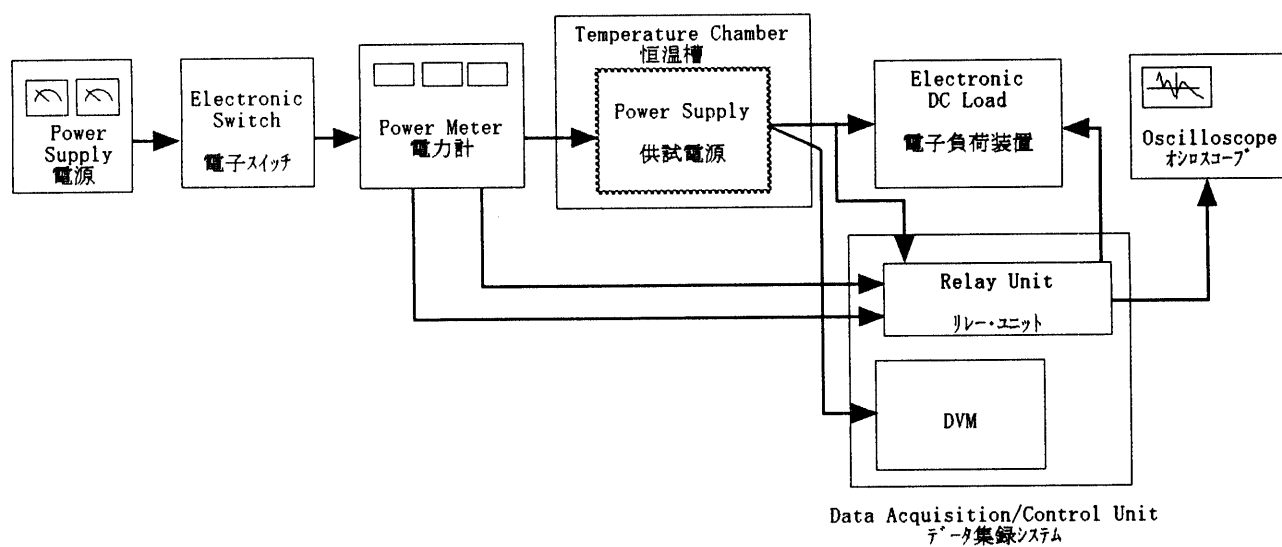


Figure A