



TEST DATA OF ZUS62412

(24.0V INPUT)

Regulated DC Power Supply

Date : Sep. 23. 1996

Approved by : T. Sugimori
Design Manager

Prepared by : H. Ise
Design Engineer


コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	5
リップルノイズ	
6. Overcurrent Protection	6
過電流保護	
7. Dynamic Load Responce	7
動的負荷変動	
8. Rise and Fall Time	8
立上り、立下がり時間	
9. Ambient Temperature Drift	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	12
経時ドリフト	
13. Output Voltage Accuracy	13
定電圧精度	
14. Condensation	14
結露特性	
15. Figure of Testing Circuitry	15
測定回路図	

(Final Page 15)

COSEL

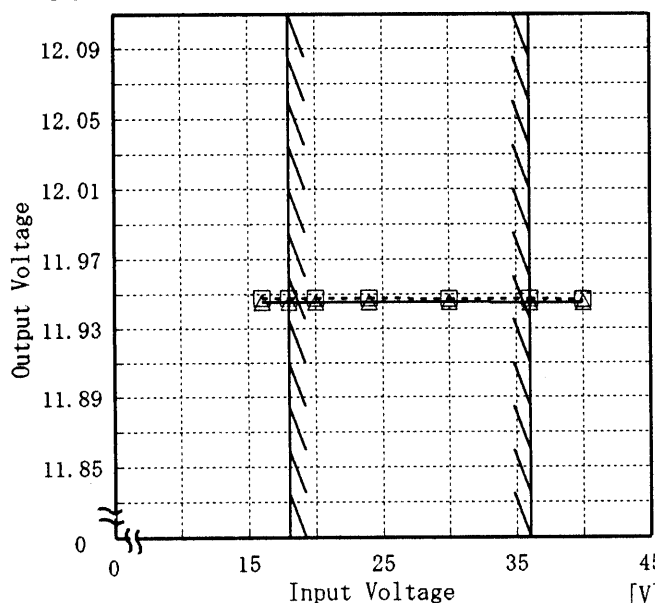Model ZUS62412		Temperature 25°C Testing Circuitry Figure A																																							
Item	Line Regulation 静的入力変動																																								
Object	+12V0.5A																																								
<p>1. Graph</p> <p>-----□----- Load 50% -----△----- Load 100%</p> <p>[V]</p>  <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th>Input Voltage [V]</th><th>Load 50% Output Volt. [V]</th><th>Load 100% Output Volt. [V]</th></tr> </thead> <tbody> <tr><td>16.0</td><td>11.948</td><td>11.945</td></tr> <tr><td>18.0</td><td>11.947</td><td>11.945</td></tr> <tr><td>20.0</td><td>11.948</td><td>11.945</td></tr> <tr><td>24.0</td><td>11.947</td><td>11.945</td></tr> <tr><td>30.0</td><td>11.947</td><td>11.945</td></tr> <tr><td>36.0</td><td>11.947</td><td>11.945</td></tr> <tr><td>40.0</td><td>11.947</td><td>11.945</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	16.0	11.948	11.945	18.0	11.947	11.945	20.0	11.948	11.945	24.0	11.947	11.945	30.0	11.947	11.945	36.0	11.947	11.945	40.0	11.947	11.945	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																							
16.0	11.948	11.945																																							
18.0	11.947	11.945																																							
20.0	11.948	11.945																																							
24.0	11.947	11.945																																							
30.0	11.947	11.945																																							
36.0	11.947	11.945																																							
40.0	11.947	11.945																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							

COSEL


Model ZUS62412

Item Efficiency 効率

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph

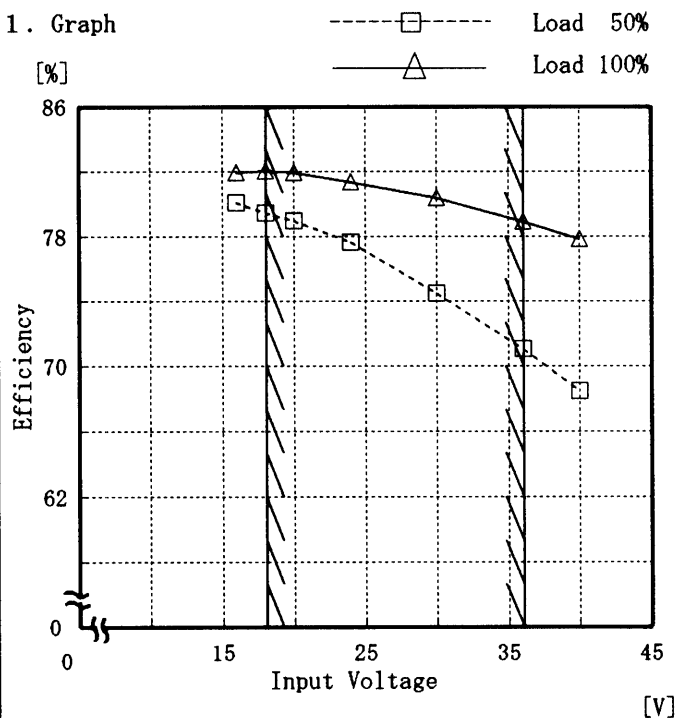


Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
16.0	80.1	82.0
18.0	79.5	82.0
20.0	78.9	81.9
24.0	77.6	81.4
30.0	74.5	80.4
36.0	71.0	78.9
40.0	68.5	77.8
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

COSEL

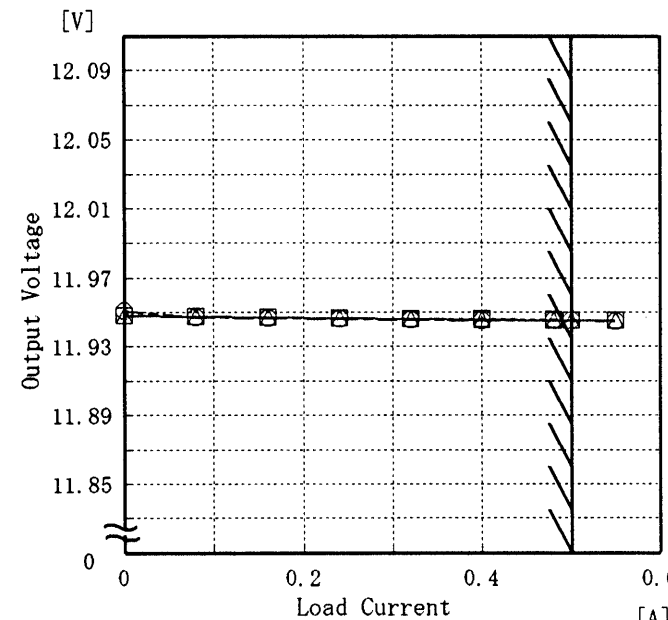Model		ZUS62412		Temperature		25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+12V0.5A																																																				
1. Graph				2. Values																																																		
<div><div><div>△</div><div>Input Volt. 18.0V</div></div><div><div>□</div><div>Input Volt. 24.0V</div></div><div><div>○</div><div>Input Volt. 36.0V</div></div></div> 				<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.00</td><td>11.948</td><td>11.948</td><td>11.951</td></tr><tr><td>0.08</td><td>11.948</td><td>11.948</td><td>11.947</td></tr><tr><td>0.16</td><td>11.947</td><td>11.947</td><td>11.947</td></tr><tr><td>0.24</td><td>11.947</td><td>11.947</td><td>11.946</td></tr><tr><td>0.32</td><td>11.946</td><td>11.947</td><td>11.946</td></tr><tr><td>0.40</td><td>11.946</td><td>11.946</td><td>11.946</td></tr><tr><td>0.48</td><td>11.946</td><td>11.946</td><td>11.945</td></tr><tr><td>0.50</td><td>11.946</td><td>11.946</td><td>11.945</td></tr><tr><td>0.55</td><td>11.945</td><td>11.945</td><td>11.945</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	11.948	11.948	11.951	0.08	11.948	11.948	11.947	0.16	11.947	11.947	11.947	0.24	11.947	11.947	11.946	0.32	11.946	11.947	11.946	0.40	11.946	11.946	11.946	0.48	11.946	11.946	11.945	0.50	11.946	11.946	11.945	0.55	11.945	11.945	11.945	—	—	—	—
Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																			
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																			
0.00	11.948	11.948	11.951																																																			
0.08	11.948	11.948	11.947																																																			
0.16	11.947	11.947	11.947																																																			
0.24	11.947	11.947	11.946																																																			
0.32	11.946	11.947	11.946																																																			
0.40	11.946	11.946	11.946																																																			
0.48	11.946	11.946	11.945																																																			
0.50	11.946	11.946	11.945																																																			
0.55	11.945	11.945	11.945																																																			
—	—	—	—																																																			
Note: Slanted line shows the range of the rated load current.																																																						
(注)斜線は定格負荷電流範囲を示す。																																																						

COSEL

Model		ZUS62412	
Item		Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)	
Object		+12V 0.5A	

1. Graph

-----□-----

Input Volt. 18.0V

-----△-----

Input Volt. 36.0V

Ripple Voltage [mV]

30

25

20

15

10

5

0

0

0.2

0.4

0.6

Load Current [A]

2. Values

Load Current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	5	5
0.08	5	5
0.16	5	5
0.24	5	5
0.32	5	5
0.40	5	5
0.48	8	5
0.50	8	5
0.55	10	5
—	—	—
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

Ripple [mVp-p]

T1

T2

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

BC-2050

COSEL


Model ZUS62412

Item Overcurrent Protection
過電流保護

Object +12V0.5A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

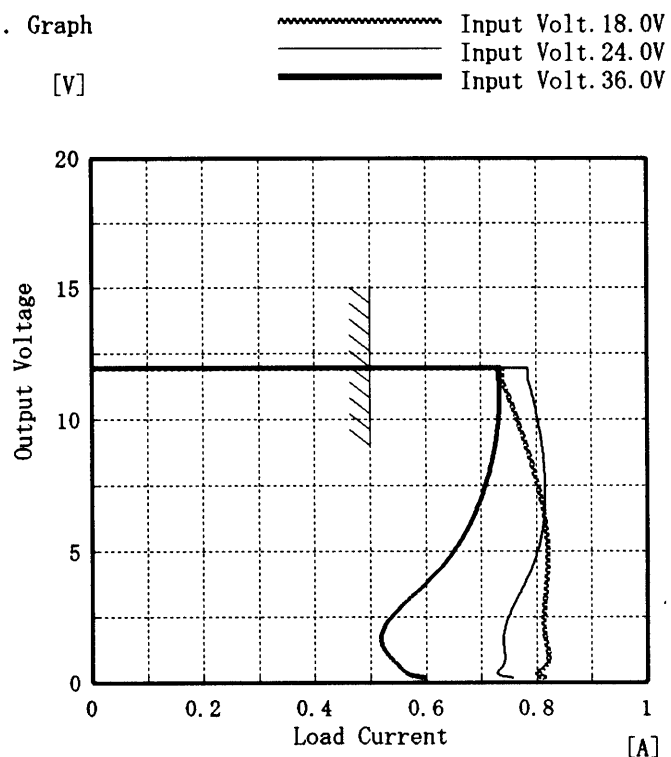

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

2. Values

Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
12.00	0.74	0.78	0.73
11.40	0.74	0.79	0.73
10.80	0.75	0.79	0.73
9.60	0.77	0.81	0.73
8.40	0.79	0.81	0.72
7.20	0.81	0.82	0.70
6.00	0.82	0.81	0.68
4.80	0.82	0.80	0.64
3.60	0.82	0.78	0.59
2.40	0.81	0.75	0.53
1.20	0.82	0.74	0.53
0.00	0.85	0.79	0.63

COSEL

Model	ZUS62412	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+12V0.5A		

Input Volt. 24.0 V



Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %



200 mV/div

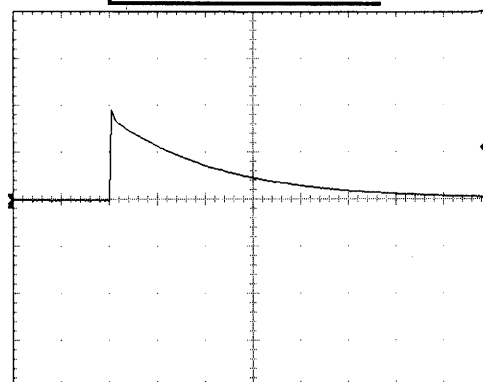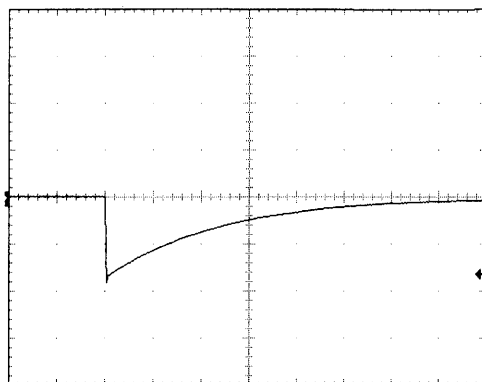

Min. Load ↔

Load 50 %



200 mV/div

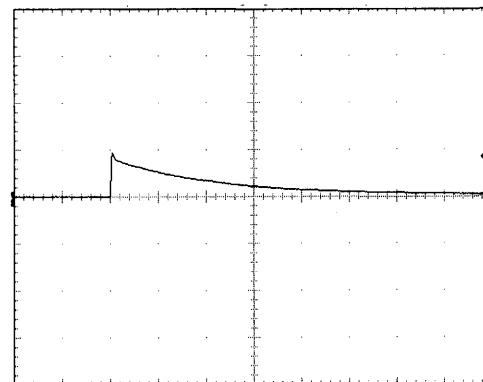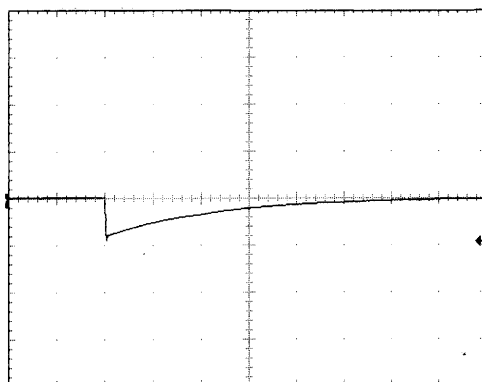

Load 50% ↔

Load 100 %

200 mV/div

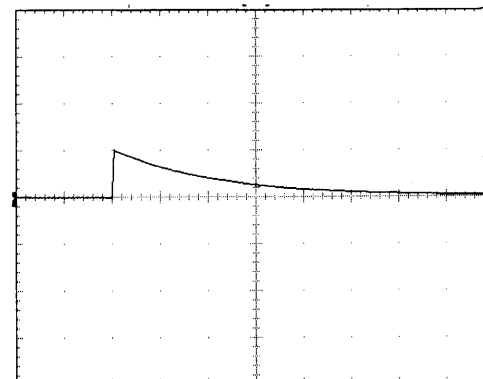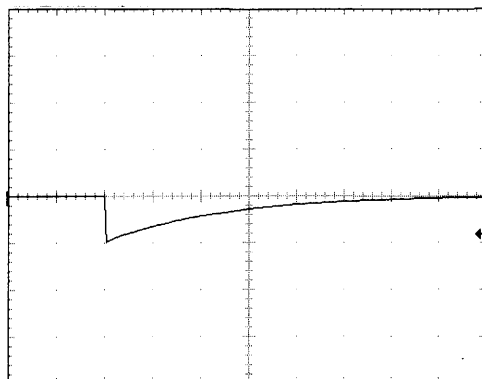


2 mS/div

COSEL

Model	ZUS62412	Temperature 25°C Testing Circuitry Figure A
Item	Rise and Fall Time 立上り、立下り時間	
Object	+12V0.5A	

1. Graph


Input Volt. 18.0 V

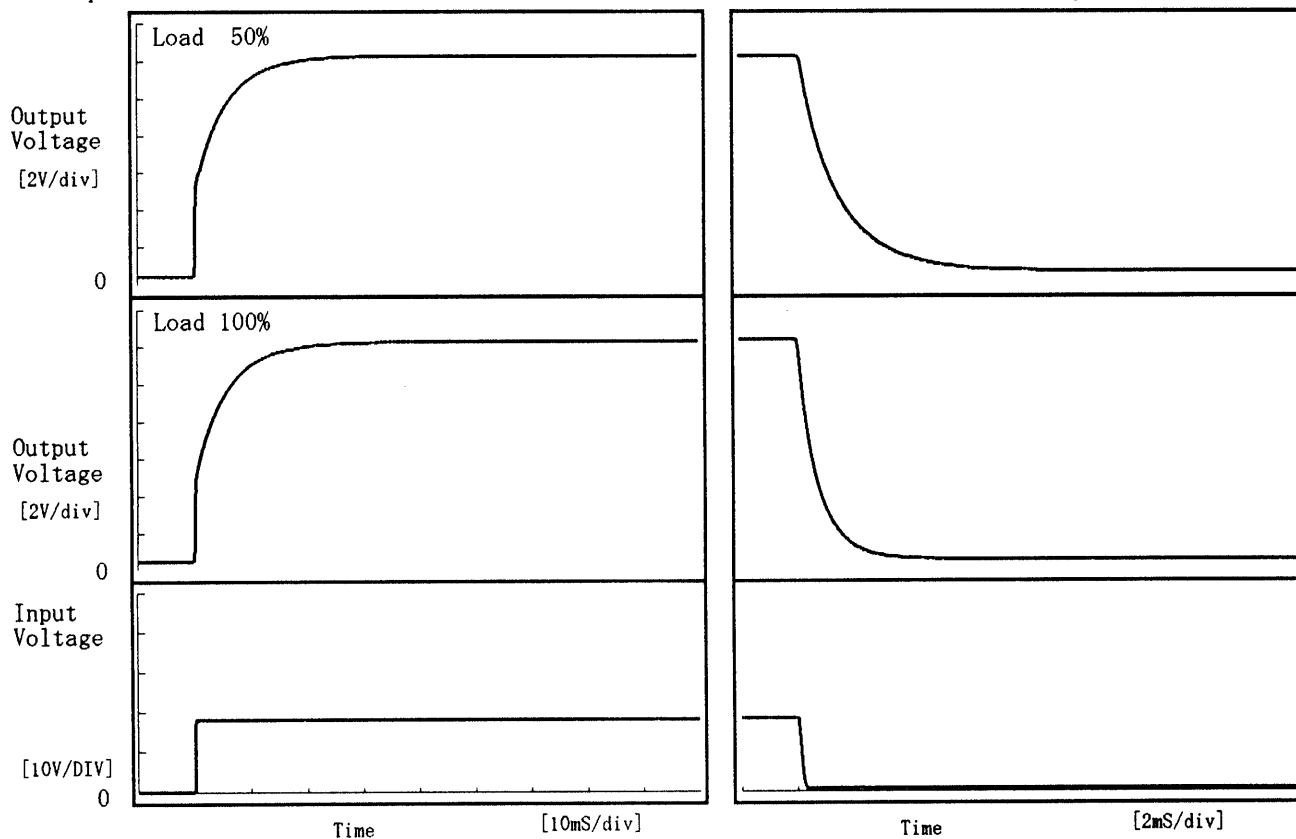

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.10	10.15	10.25	0.28	3.68
100 %	0.10	10.25	10.35	0.14	1.78

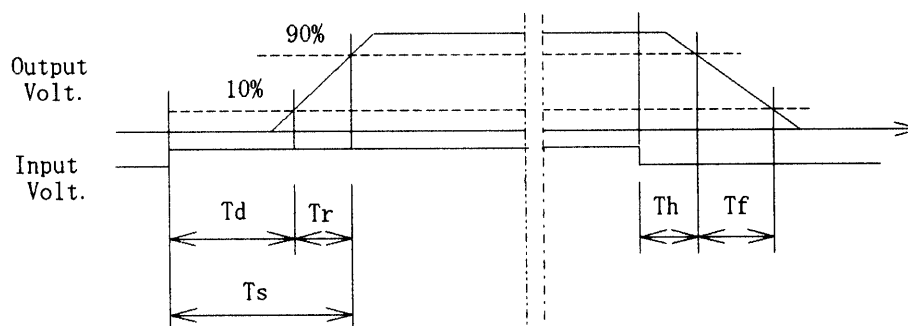

COSEL

Model		ZUS62412	Testing Circuitry Figure A	
Item		Ambient Temperature Drift 周囲温度変動		
Object		+12V0.5A		

1. Graph

△

—

Input Volt. 18.0V

□

- - -

Input Volt. 24.0V

○

- - -

Input Volt. 36.0V

Output Voltage
[V]

COSEL

Model

ZUS62412

Item

Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object


+12V0.5A

Testing Circuitry Figure A

1. Graph

-----□----- Load 50%
 -----△----- Load 100%

[V]

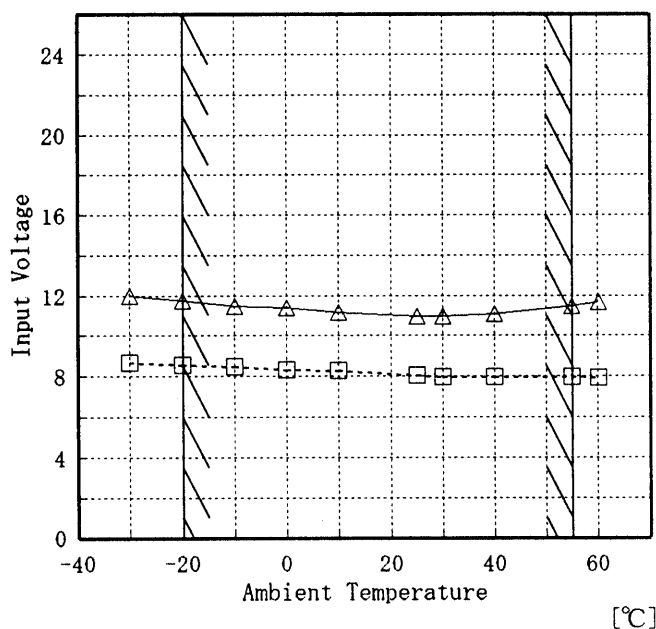

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	8.7	12.0
-20	8.6	11.7
-10	8.5	11.5
0	8.3	11.4
10	8.3	11.1
25	8.0	11.0
30	8.0	11.0
40	8.0	11.1
55	8.0	11.5
60	7.9	11.7
—	—	—

COSEL

LOREL

Model	ZUS62412
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+12V0.5A

1. Graph

-----□-----

Load 50%

———△———

Load 100%

[mV]

40

30

20

10

0

Ripple Voltage

-40

-20

0

20

40

60

Ambient Temperature

[°C]

Input Volt. 18.0 V

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-30	10	20
-20	5	10
-10	5	10
0	5	10
10	5	10
25	5	10
30	5	10
40	5	10
55	5	10
60	5	10
—	—	—

COSEL

Model

ZUS62412

Item

Time Lapse Drift 経時ドリフト

Temperature

25 °C

Testing Circuitry


Figure A

Object

+12V0.5A

1. Graph

[V]

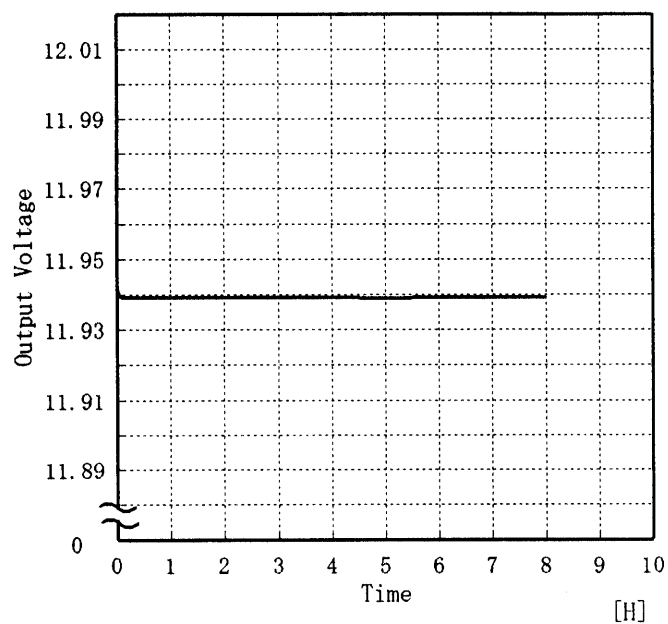

Input Volt. 24V

Load 100%

2. Values

Time since start [H]	Output Voltage [V]
0.0	11.942
0.5	11.939
1.0	11.939
2.0	11.939
3.0	11.939
4.0	11.939
5.0	11.939
6.0	11.939
7.0	11.939
8.0	11.939

COSEL

Model	ZUS62412	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+12V0.5A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 18.0~36.0 V

Load Current : 0.0~0.5 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 18.0~36.0 V

負荷電流 : 0.0~0.5 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	25	36.0	0.0	11.952	±9	±0.1
Minimum Voltage	55	36.0	0.5	11.934		

COSEL

LUCEL

Model ZUS62412

Item Condensation 結露特性

Testing Circuitry Figure A

Object +12V 0.5A

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 26℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温26℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	11.939	5	40
	2	11.939	5	40
	3	11.940	5	35
Load 100 %	1	11.938	5	65
	2	11.938	5	60
	3	11.938	5	55

Input Volt. 24.0 V

