



TEST DATA OF ZUW1R51215

(12.0V INPUT)

Regulated DC Power Supply

Date : June 14. 1996

Approved by : T. Higimori
Design Manager

Prepared by : K. Shimano
Design Engineer

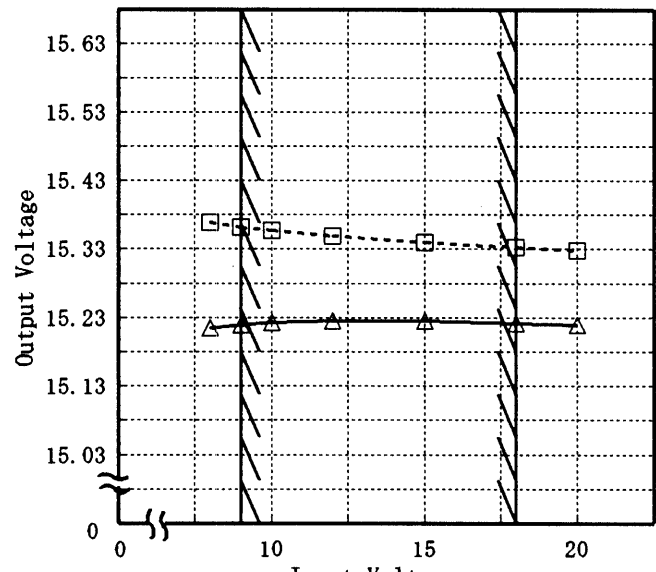
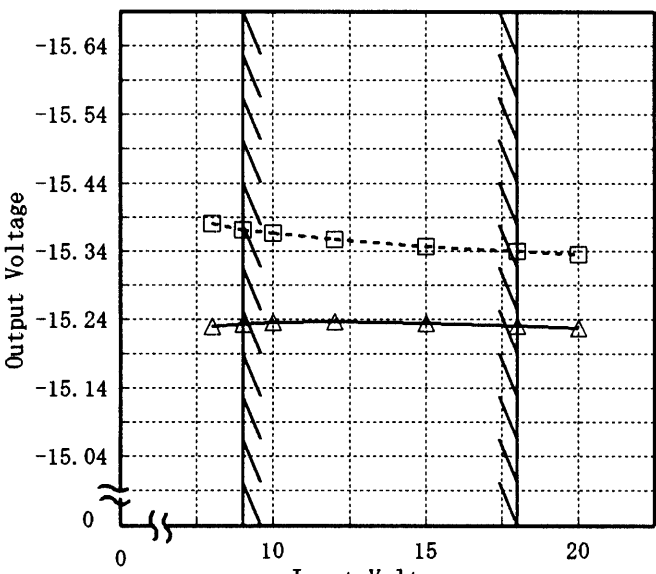
コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	6
リップルノイズ	
6. Overcurrent Protection	8
過電流保護	
7. Dynamic Load Responce	9
動的負荷変動	
8. Rise and Fall Time	11
立上り、立下がり時間	
9. Ambient Temperature Drift	13
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	14
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	15
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	16
経時ドリフト	
13. Output Voltage Accuracy	17
定電圧精度	
14. Condensation	18
結露特性	
15. Figure of Testing Circuitry	20
測定回路図	

(Final Page 20)

COSEL

Model		ZUW1R51215																																								
Item		Line Regulation 静的入力変動																																								
Object		+15V0.05A																																								
1. Graph		-----□----- Load 50% -----△----- Load 100%																																								
[V]																																										
																																										
Output Voltage		Input Voltage [V]																																								
		[V]																																								
2. Values																																										
<table><tr><th>Input Voltage [V]</th><th>Load 50% Output Volt. [V]</th><th>Load 100% Output Volt. [V]</th></tr><tr><td>8.0</td><td>15.369</td><td>15.215</td></tr><tr><td>9.0</td><td>15.362</td><td>15.220</td></tr><tr><td>10.0</td><td>15.357</td><td>15.223</td></tr><tr><td>12.0</td><td>15.349</td><td>15.226</td></tr><tr><td>15.0</td><td>15.340</td><td>15.225</td></tr><tr><td>18.0</td><td>15.333</td><td>15.222</td></tr><tr><td>20.0</td><td>15.329</td><td>15.220</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	8.0	15.369	15.215	9.0	15.362	15.220	10.0	15.357	15.223	12.0	15.349	15.226	15.0	15.340	15.225	18.0	15.333	15.222	20.0	15.329	15.220	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																								
8.0	15.369	15.215																																								
9.0	15.362	15.220																																								
10.0	15.357	15.223																																								
12.0	15.349	15.226																																								
15.0	15.340	15.225																																								
18.0	15.333	15.222																																								
20.0	15.329	15.220																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
Object		-15V0.05A																																								
1. Graph		-----□----- Load 50% -----△----- Load 100%																																								
[V]																																										
																																										
Output Voltage		Input Voltage [V]																																								
		[V]																																								
2. Values																																										
<table><tr><th>Input Voltage [V]</th><th>Load 50% Output Volt. [V]</th><th>Load 100% Output Volt. [V]</th></tr><tr><td>8.0</td><td>-15.380</td><td>-15.230</td></tr><tr><td>9.0</td><td>-15.371</td><td>-15.233</td></tr><tr><td>10.0</td><td>-15.366</td><td>-15.235</td></tr><tr><td>12.0</td><td>-15.357</td><td>-15.236</td></tr><tr><td>15.0</td><td>-15.347</td><td>-15.234</td></tr><tr><td>18.0</td><td>-15.339</td><td>-15.230</td></tr><tr><td>20.0</td><td>-15.335</td><td>-15.228</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	8.0	-15.380	-15.230	9.0	-15.371	-15.233	10.0	-15.366	-15.235	12.0	-15.357	-15.236	15.0	-15.347	-15.234	18.0	-15.339	-15.230	20.0	-15.335	-15.228	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																								
8.0	-15.380	-15.230																																								
9.0	-15.371	-15.233																																								
10.0	-15.366	-15.235																																								
12.0	-15.357	-15.236																																								
15.0	-15.347	-15.234																																								
18.0	-15.339	-15.230																																								
20.0	-15.335	-15.228																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
Note: Slanted line shows the range of the rated input voltage.																																										
(注)斜線は定格入力電圧範囲を示す。																																										

-1-

BC-2018

COSEL

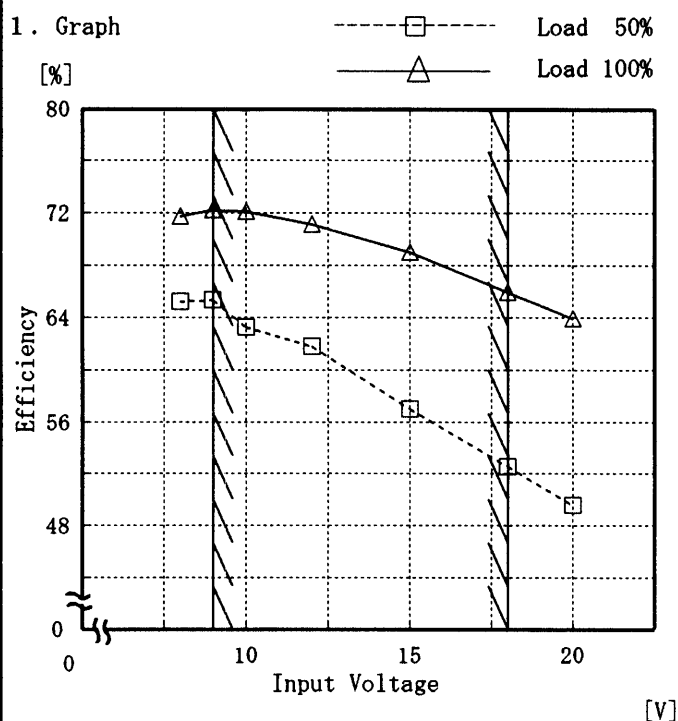
Model ZUW1R51215

Item Efficiency 効率

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph




2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
8.0	65.2	71.7
9.0	65.3	72.2
10.0	63.3	72.1
12.0	61.8	71.1
15.0	57.0	69.0
18.0	52.5	65.9
20.0	49.6	63.9
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

COSEL

Model ZUW1R51215		Temperature 25°C																																																
Item	Load Regulation 静的負荷変動	Testing Circuitry	Figure A																																															
Object	+15V0.05A	2. Values <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th><th>Input Volt. 9.0[V]</th><th>Input Volt. 12.0[V]</th><th>Input Volt. 18.0[V]</th></tr> <tr> <th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> </thead> <tbody> <tr><td>0.000</td><td>15.547</td><td>15.528</td><td>15.506</td></tr> <tr><td>0.008</td><td>15.469</td><td>15.450</td><td>15.430</td></tr> <tr><td>0.016</td><td>15.414</td><td>15.397</td><td>15.379</td></tr> <tr><td>0.024</td><td>15.366</td><td>15.353</td><td>15.337</td></tr> <tr><td>0.032</td><td>15.322</td><td>15.313</td><td>15.300</td></tr> <tr><td>0.040</td><td>15.276</td><td>15.273</td><td>15.264</td></tr> <tr><td>0.048</td><td>15.232</td><td>15.236</td><td>15.231</td></tr> <tr><td>0.050</td><td>15.221</td><td>15.227</td><td>15.223</td></tr> <tr><td>0.055</td><td>15.193</td><td>15.203</td><td>15.203</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	15.547	15.528	15.506	0.008	15.469	15.450	15.430	0.016	15.414	15.397	15.379	0.024	15.366	15.353	15.337	0.032	15.322	15.313	15.300	0.040	15.276	15.273	15.264	0.048	15.232	15.236	15.231	0.050	15.221	15.227	15.223	0.055	15.193	15.203	15.203	—	—	—	—
Load Current [A]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.000	15.547	15.528	15.506																																															
0.008	15.469	15.450	15.430																																															
0.016	15.414	15.397	15.379																																															
0.024	15.366	15.353	15.337																																															
0.032	15.322	15.313	15.300																																															
0.040	15.276	15.273	15.264																																															
0.048	15.232	15.236	15.231																																															
0.050	15.221	15.227	15.223																																															
0.055	15.193	15.203	15.203																																															
—	—	—	—																																															
1. Graph																																																		
Object	-15V0.05A	2. Values <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th><th>Input Volt. 9.0[V]</th><th>Input Volt. 12.0[V]</th><th>Input Volt. 18.0[V]</th></tr> <tr> <th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> </thead> <tbody> <tr><td>0.000</td><td>-15.535</td><td>-15.517</td><td>-15.496</td></tr> <tr><td>0.008</td><td>-15.464</td><td>-15.445</td><td>-15.425</td></tr> <tr><td>0.016</td><td>-15.411</td><td>-15.395</td><td>-15.376</td></tr> <tr><td>0.024</td><td>-15.364</td><td>-15.350</td><td>-15.334</td></tr> <tr><td>0.032</td><td>-15.319</td><td>-15.310</td><td>-15.296</td></tr> <tr><td>0.040</td><td>-15.276</td><td>-15.272</td><td>-15.262</td></tr> <tr><td>0.048</td><td>-15.232</td><td>-15.235</td><td>-15.229</td></tr> <tr><td>0.050</td><td>-15.221</td><td>-15.226</td><td>-15.221</td></tr> <tr><td>0.055</td><td>-15.194</td><td>-15.203</td><td>-15.201</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	-15.535	-15.517	-15.496	0.008	-15.464	-15.445	-15.425	0.016	-15.411	-15.395	-15.376	0.024	-15.364	-15.350	-15.334	0.032	-15.319	-15.310	-15.296	0.040	-15.276	-15.272	-15.262	0.048	-15.232	-15.235	-15.229	0.050	-15.221	-15.226	-15.221	0.055	-15.194	-15.203	-15.201	—	—	—	—
Load Current [A]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.000	-15.535	-15.517	-15.496																																															
0.008	-15.464	-15.445	-15.425																																															
0.016	-15.411	-15.395	-15.376																																															
0.024	-15.364	-15.350	-15.334																																															
0.032	-15.319	-15.310	-15.296																																															
0.040	-15.276	-15.272	-15.262																																															
0.048	-15.232	-15.235	-15.229																																															
0.050	-15.221	-15.226	-15.221																																															
0.055	-15.194	-15.203	-15.201																																															
—	—	—	—																																															
1. Graph																																																		
Note: Slanted line shows the range of the rated load current. (注)斜線は定格負荷電流範囲を示す。																																																		

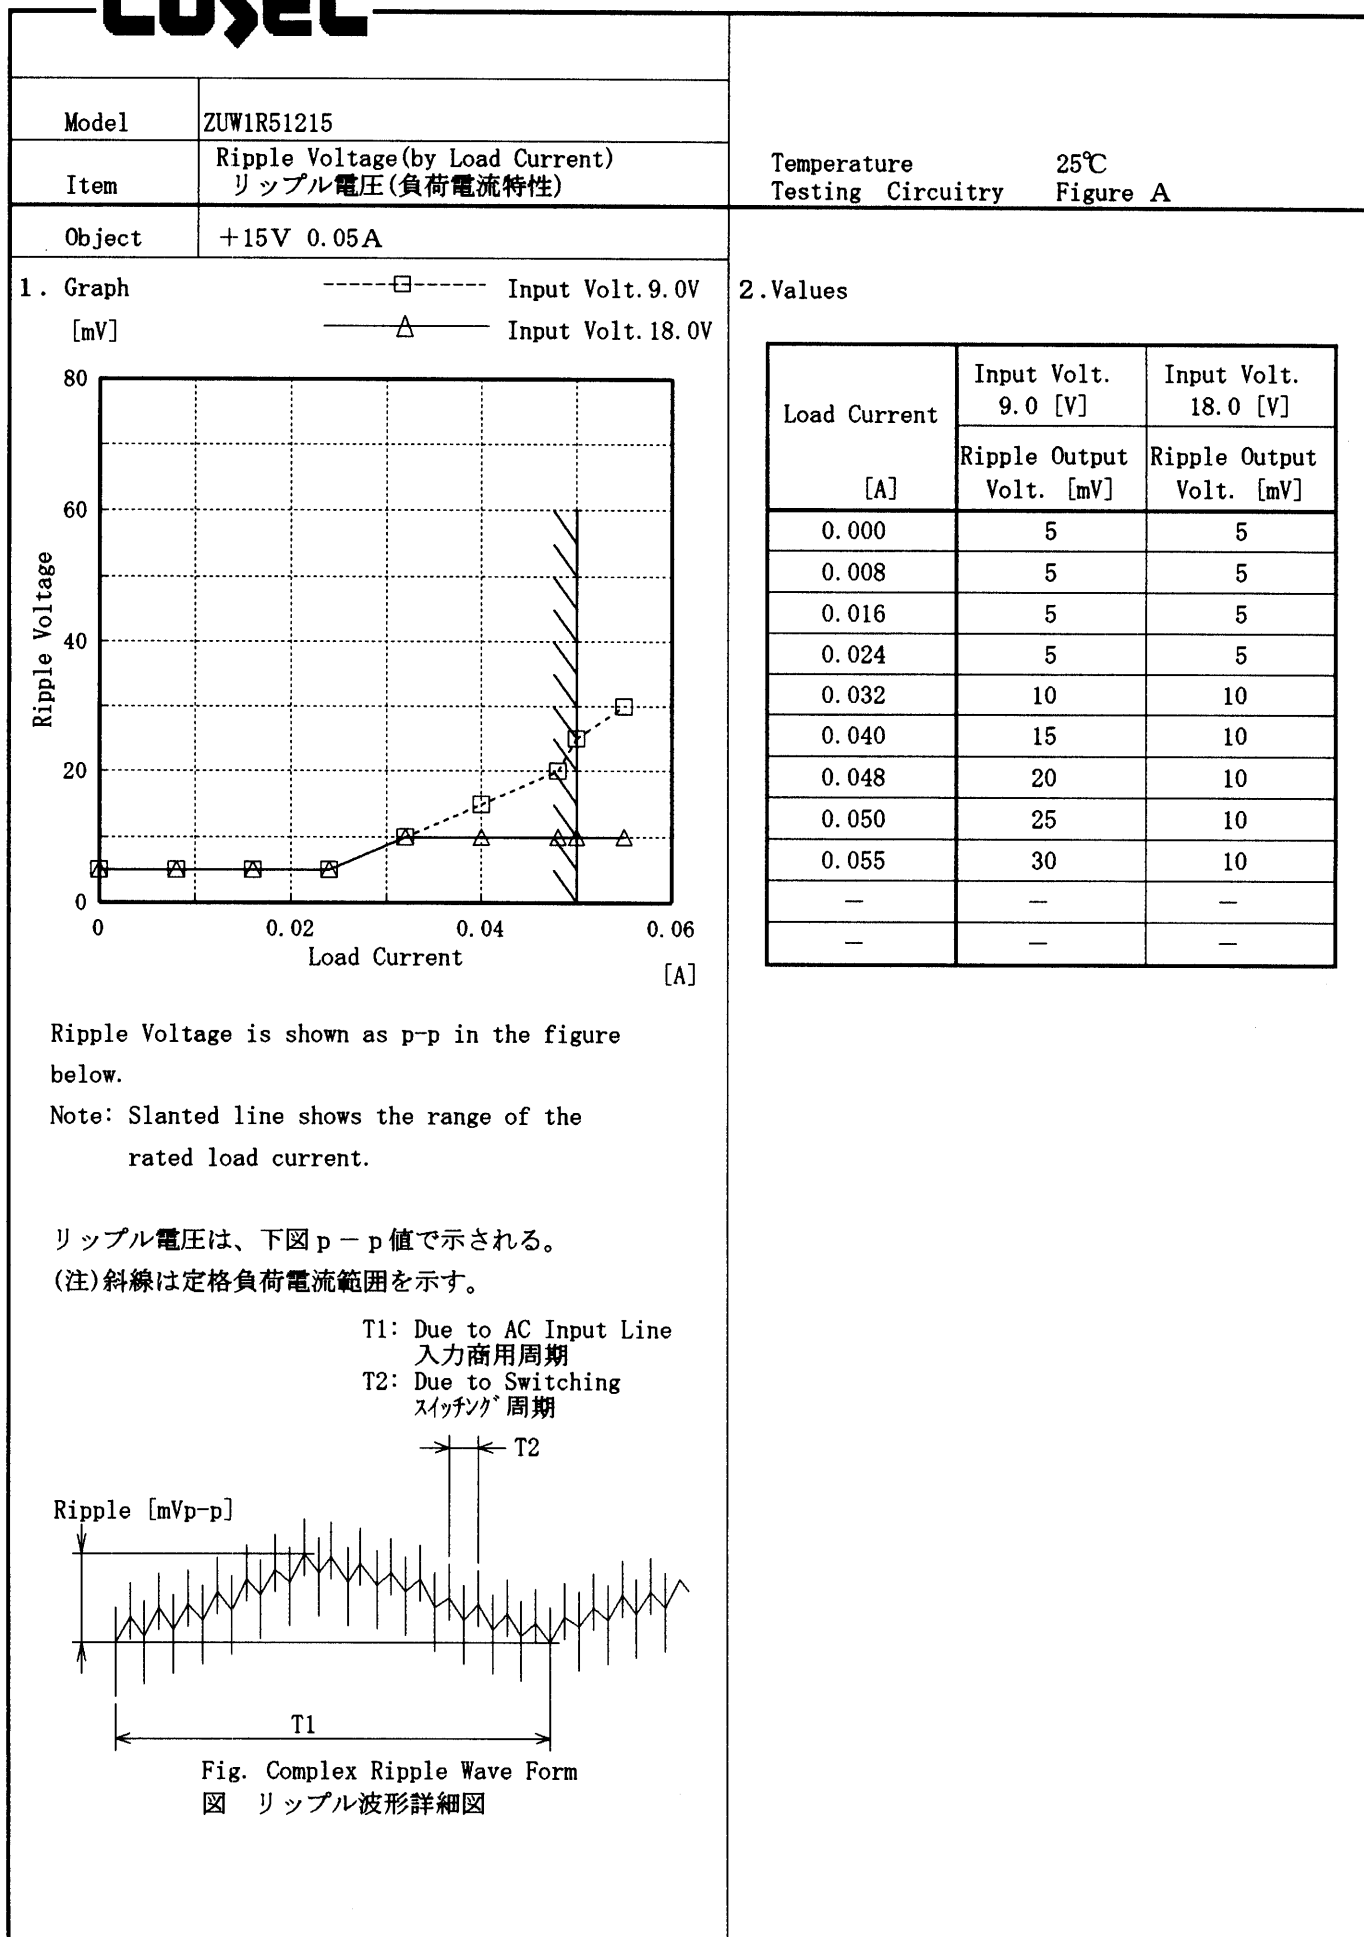COSEL



COSEL

Model		ZUW1R51215	
Item		Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)	
Object		-15V 0.05A	

1. Graph

-----□----- Input Volt. 9.0V

-----△----- Input Volt. 18.0V

80

60

40

20

0

Ripple Voltage

0

0.02

0.04

0.06

Load Current

[A]

2. Values

Load Current	Input Volt.	Input Volt.
	9.0 [V]	18.0 [V]
[A]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.000	5	5
0.008	5	5
0.016	5	5
0.024	5	5
0.032	10	5
0.040	15	5
0.048	20	5
0.050	20	5
0.055	25	5
—	—	—
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

→

←

T2

←

→

T1

Ripple [mVp-p]

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

- 6 -

COSEL

LOREL

Model	ZUW1R51215
Item	Ripple-Noise リップルノイズ
Object	-15V0.05A

Temperature	25℃
Testing Circuitry	Figure A

1. Graph

-----□-----

Input Volt. 9.0V

-----△-----

Input Volt. 18.0V

[mV]

140

120

100

80

60

40

20

0

0

0.02

0.04

0.06

Load Current

[A]

2. Values

Load current [A]	Input Volt. 9.0 [V]	Input Volt. 18.0 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.000	20	25
0.008	20	25
0.016	25	25
0.024	30	25
0.032	30	25
0.040	35	25
0.048	40	25
0.050	40	25
0.055	40	30
—	—	—
—	—	—

Ripple-Noise is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line

入力商用周期

T2: Due to Switching

スイッチング周期

Ripple-Noise

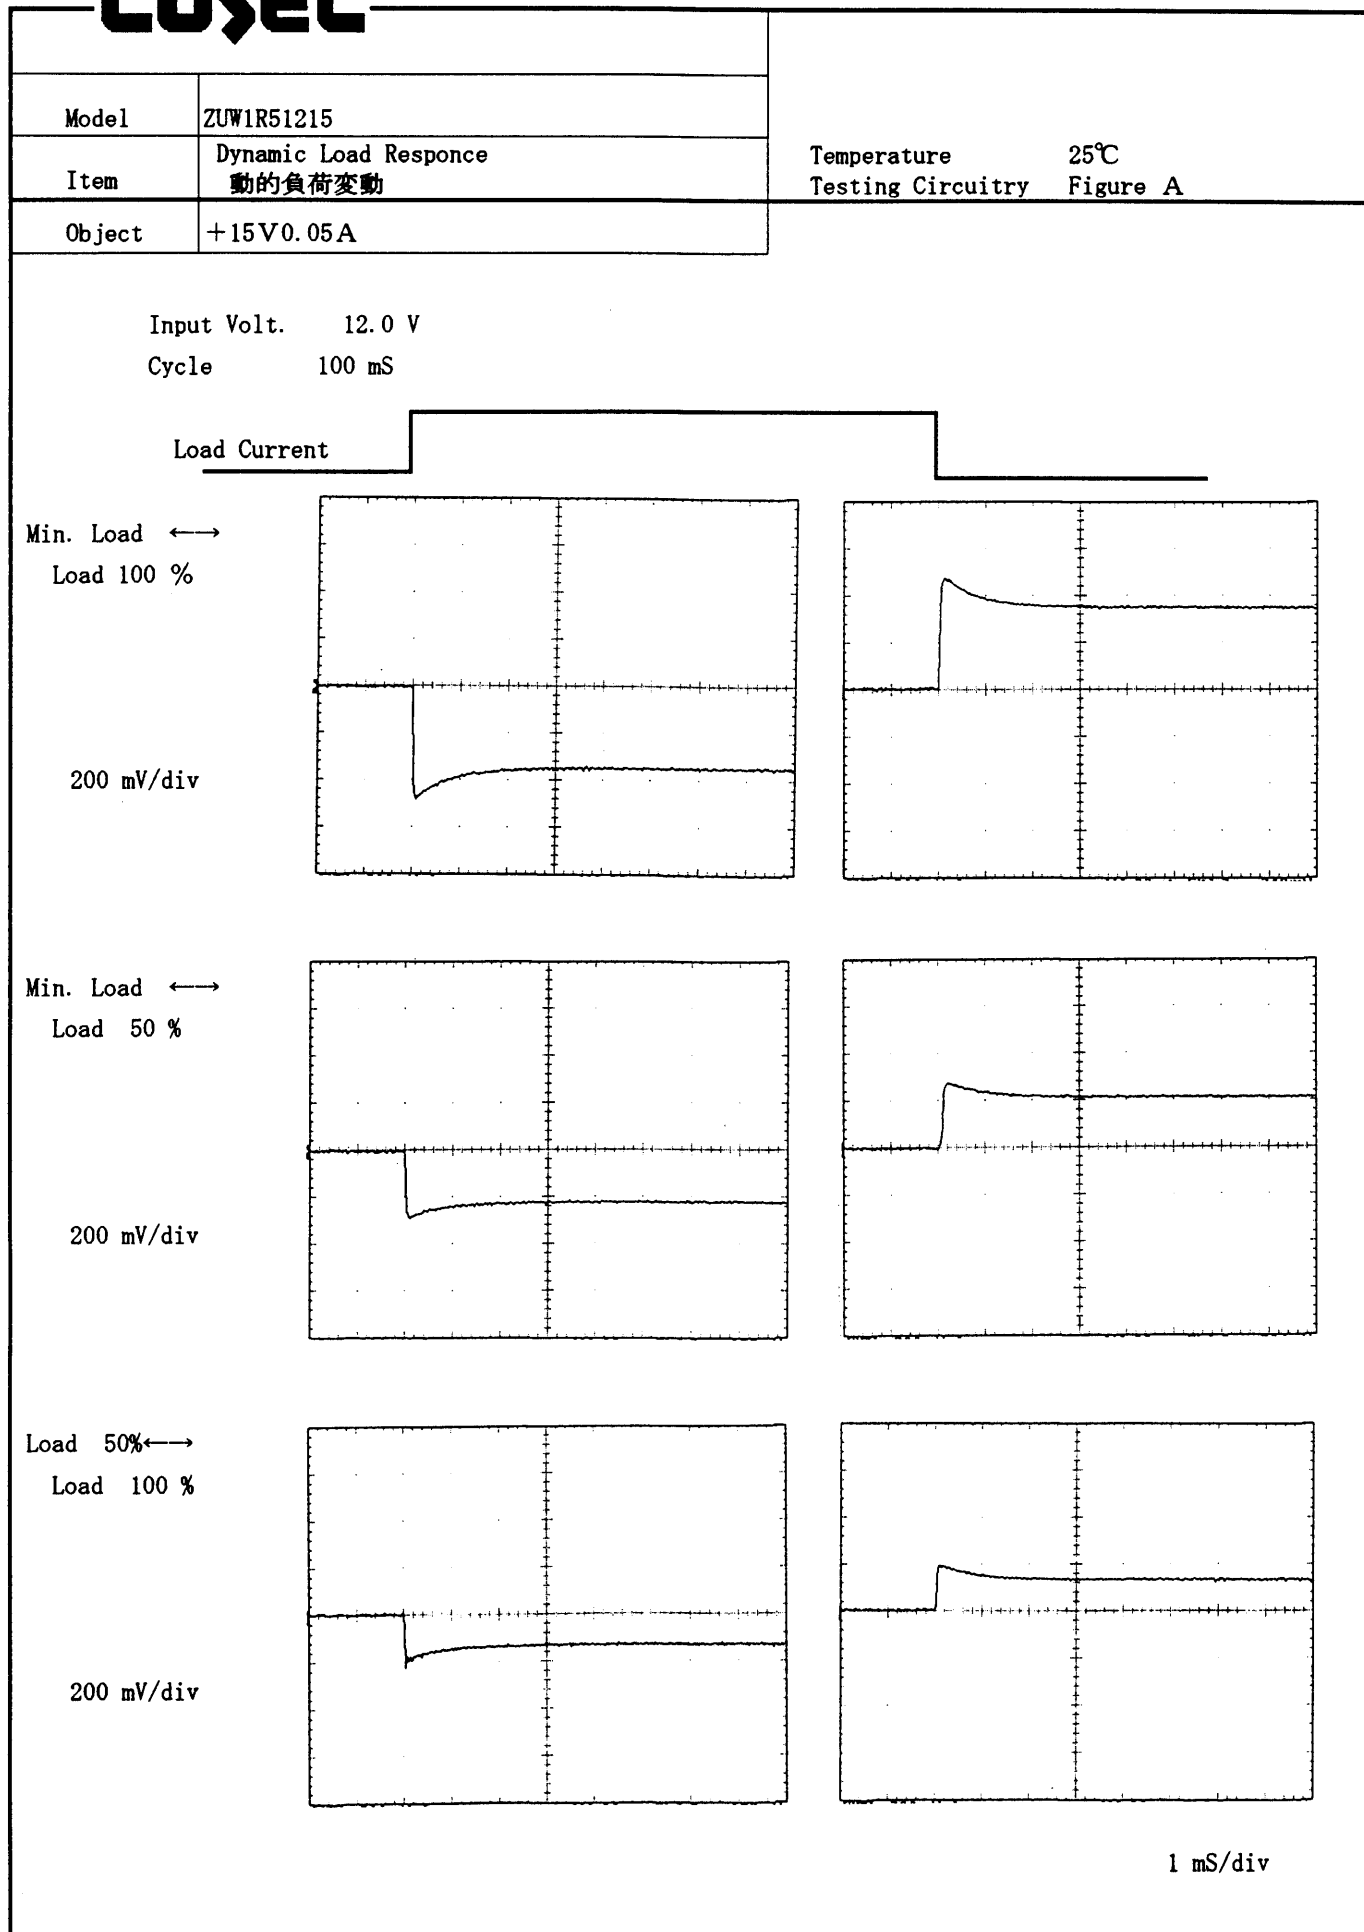
[mVp-p]

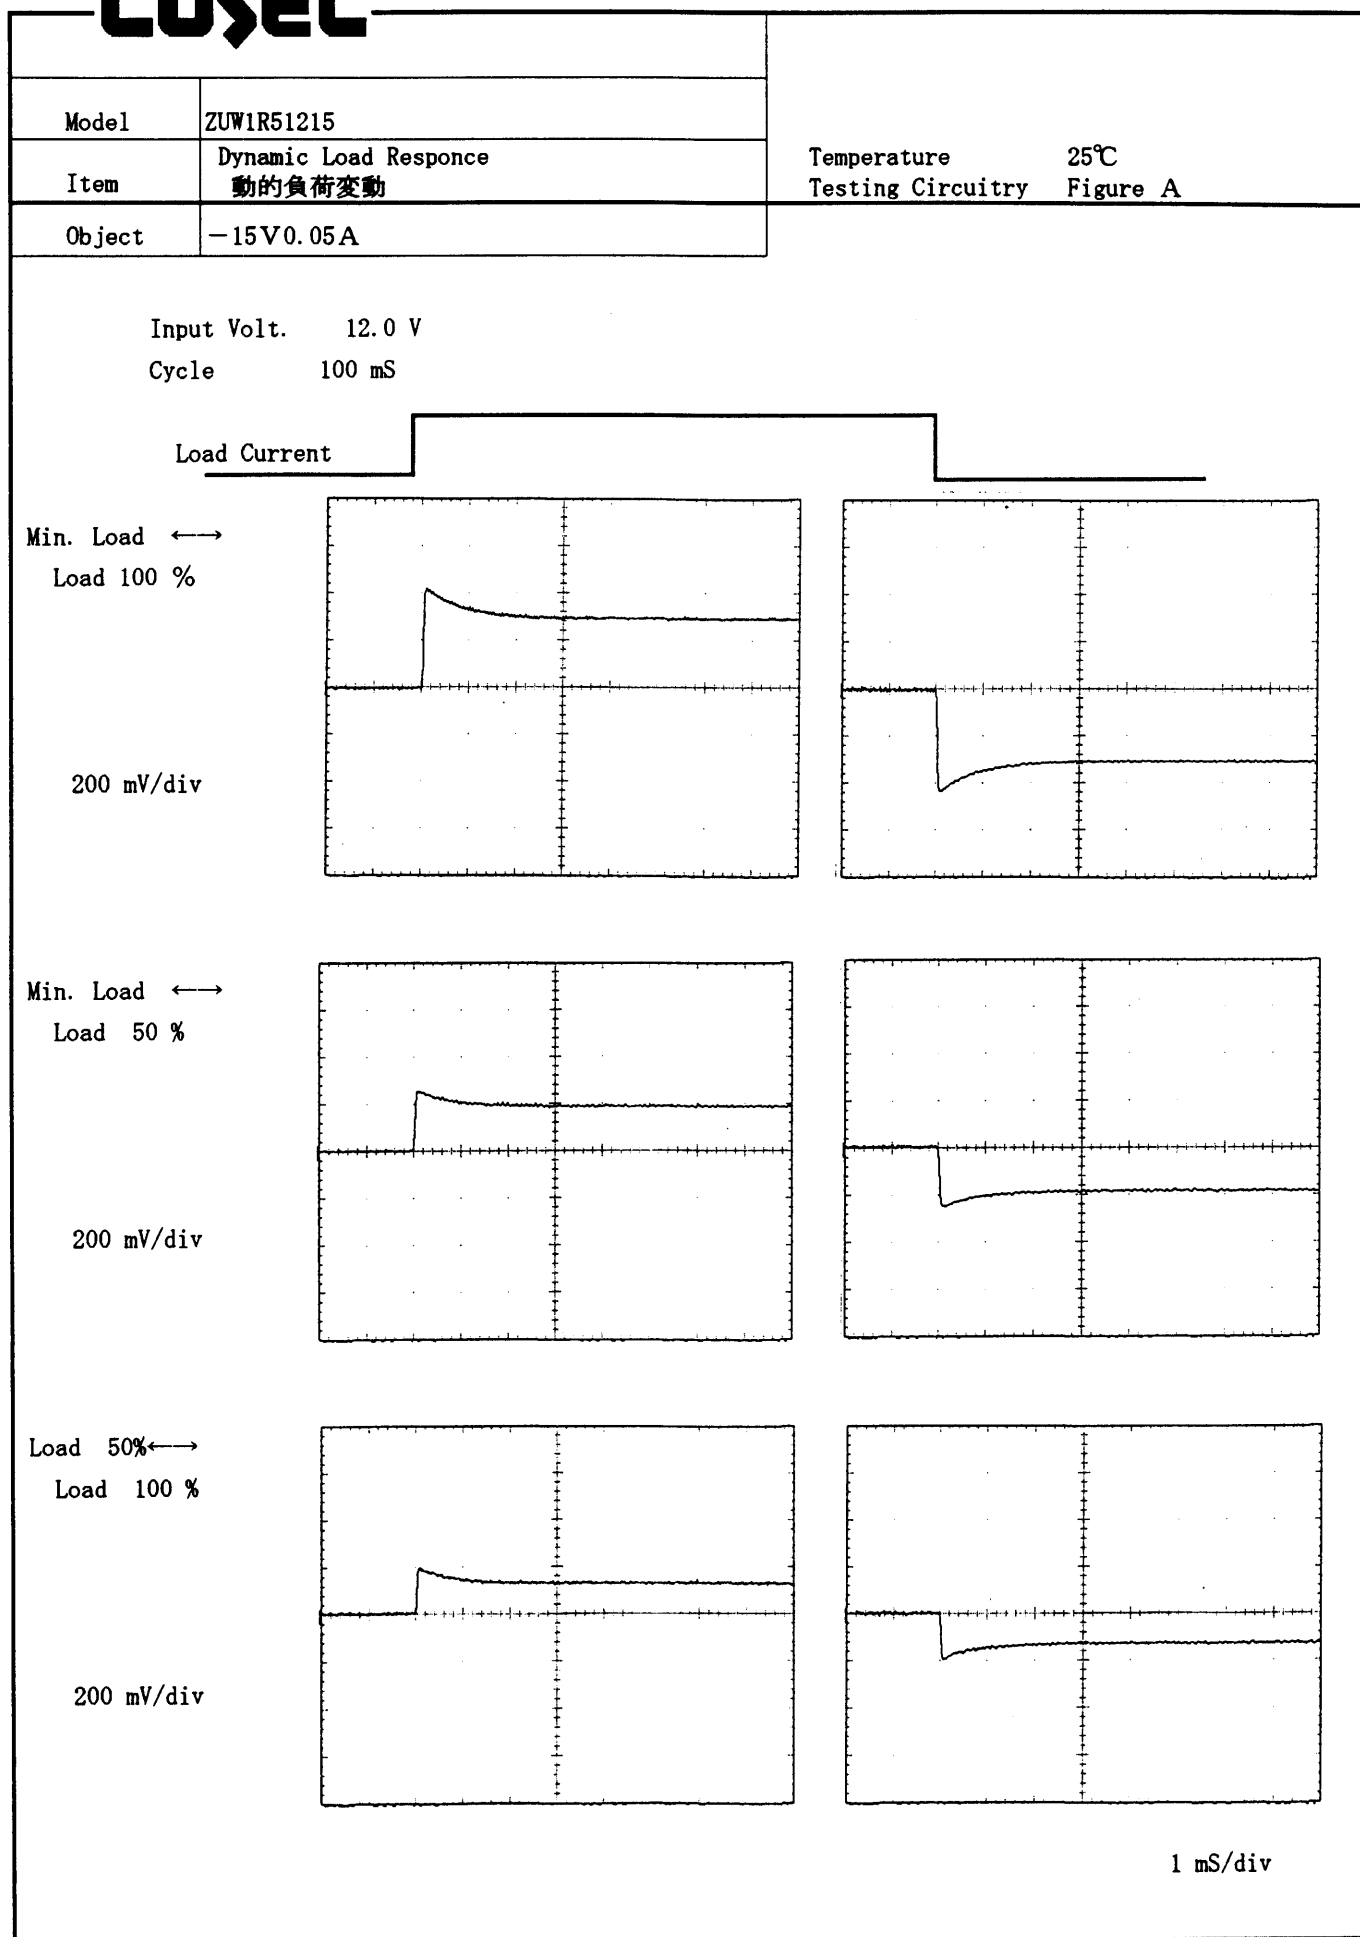
Fig. Complex Ripple Wave Form

図 リップル波形詳細図

COSEL

Model		ZUW1R51215		Temperature		25℃	
Item		Overcurrent Protection 過電流保護		Testing Circuitry Figure A			
Object		+15V0.05A		2. Values			
1. Graph		<div><div><div>~~~~~</div><div>———</div><div>———</div></div><div>Input Volt.9.0 V Input Volt.12.0 V Input Volt.18.0 V</div></div> <div><div><div>[V]</div><div>20.0</div><div>15.0</div><div>10.0</div><div>5.0</div><div>0.0</div></div><div><div>0</div><div>0.05</div><div>0.1</div><div>0.15</div><div>0.2</div><div>0.25</div></div></div> <div>Output Voltage</div> <div>Load Current</div> <div>[A]</div>					
Object		-15V0.05A		2. Values			
1. Graph		<div><div><div>~~~~~</div><div>———</div><div>———</div></div><div>Input Volt.9.0 V Input Volt.12.0 V Input Volt.18.0 V</div></div> <div><div><div>[V]</div><div>-20.0</div><div>-15.0</div><div>-10.0</div><div>-5.0</div><div>0.0</div></div><div><div>0</div><div>0.05</div><div>0.1</div><div>0.15</div><div>0.2</div><div>0.25</div></div></div> <div>Output Voltage</div> <div>Load Current</div> <div>[A]</div>					
Note: Slanted line shows the range of the rated load current.		(注)斜線は定格負荷電流範囲を示す。		BC-2018			

COSEL


COSEL

COSEL

Model	ZUW1R51215	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+15V 0.05A		

1. Graph

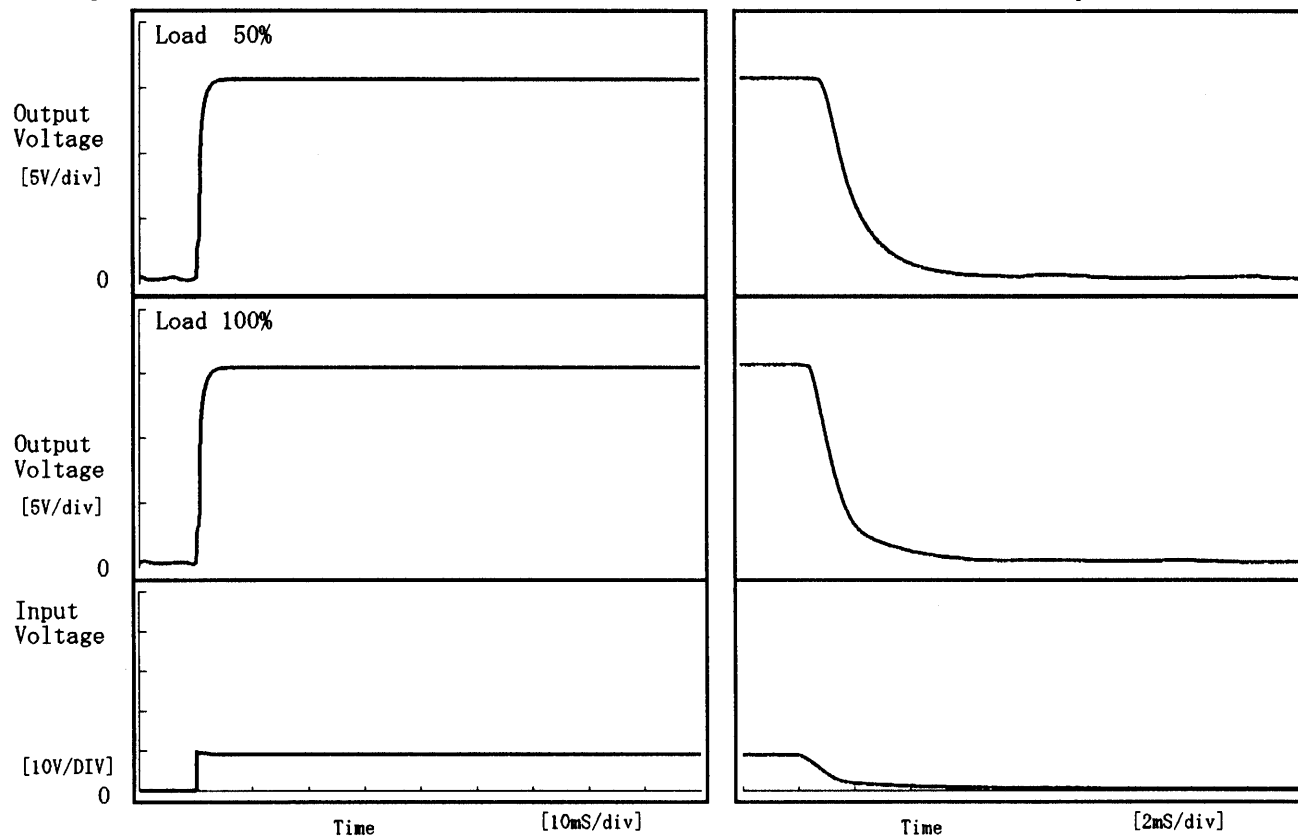
Input Volt. 9.0 V



2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.10	1.40	1.50	1.12	2.79
100 %	0.10	1.50	1.60	0.67	2.60

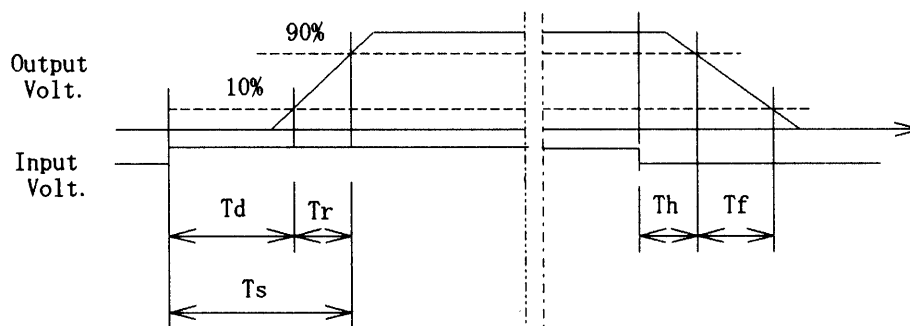


COSEL

Model	ZUW1R51215	Temperature	25℃
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	-15V0.05A		

1. Graph

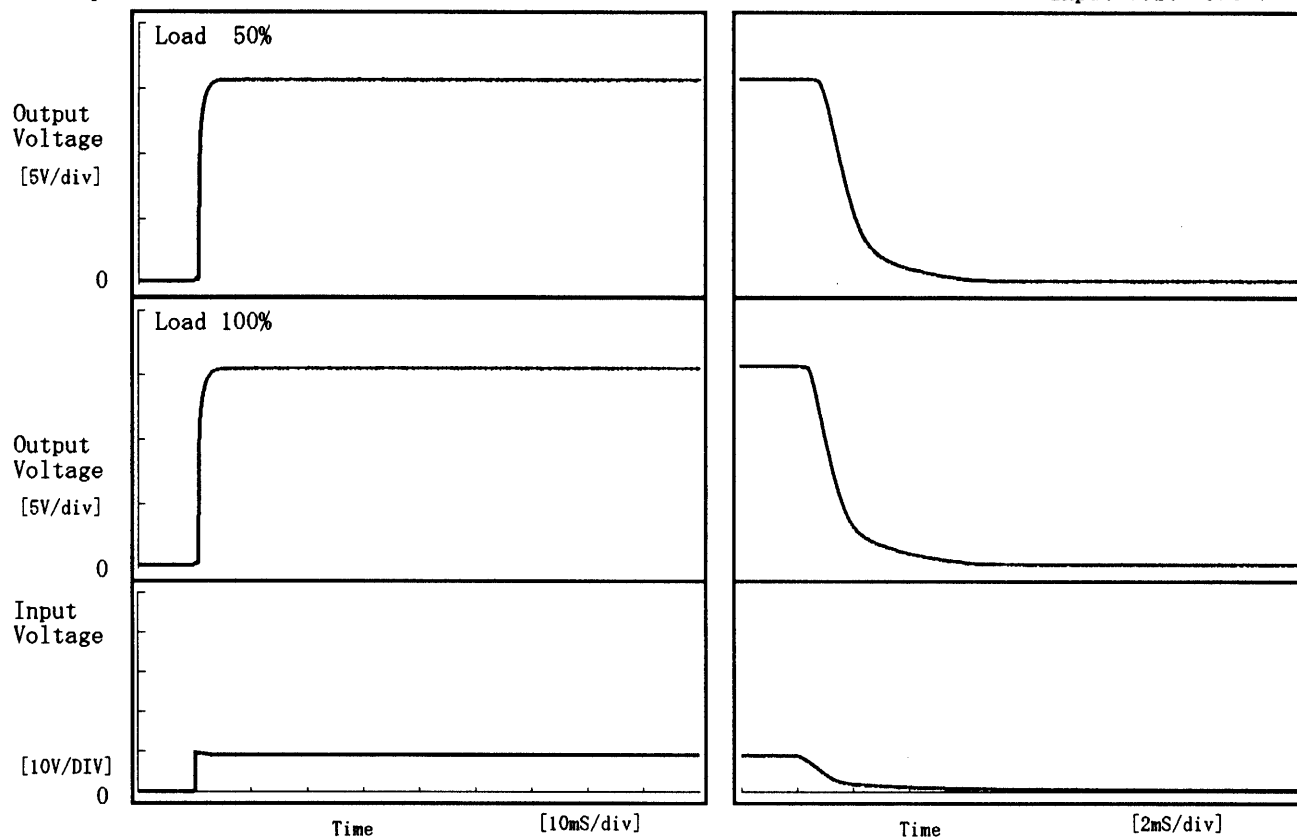
Input Volt. 9.0 V



2. Values

[mS]



Load \ Time	T d	T r	T s	T h	T f
50 %	0.55	0.95	1.50	1.10	2.37
100 %	0.55	1.05	1.60	0.67	2.51

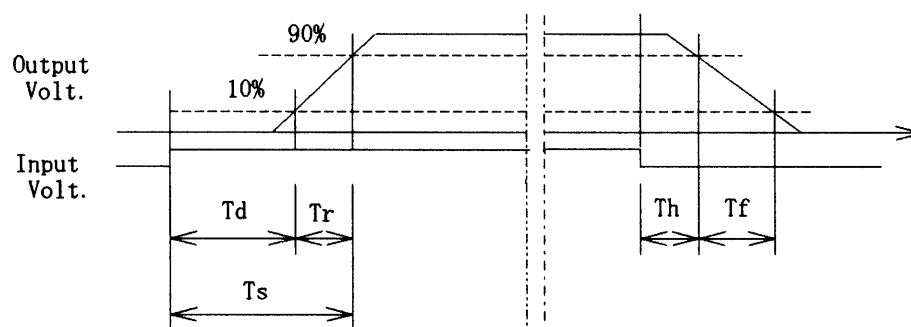


COSEL


Model		ZUW1R51215																																																					
Item		Ambient Temperature Drift 周囲温度変動																																																					
Object		+15V0.05A																																																					
1. Graph		2. Values																																																					
<div><div><div>△</div><div>Input Volt. 9.0V</div></div><div><div>□</div><div>Input Volt. 12.0V</div></div><div><div>○</div><div>Input Volt. 18.0V</div></div></div> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>		<table><tr><th>Temperature</th><th>Input Volt. 9.0[V]</th><th>Input Volt. 12.0[V]</th><th>Input Volt. 18.0[V]</th></tr><tr><th>[°C]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>-30</td><td>15.237</td><td>15.241</td><td>15.237</td></tr><tr><td>-20</td><td>15.232</td><td>15.236</td><td>15.233</td></tr><tr><td>-10</td><td>15.228</td><td>15.233</td><td>15.229</td></tr><tr><td>0</td><td>15.226</td><td>15.231</td><td>15.227</td></tr><tr><td>10</td><td>15.224</td><td>15.229</td><td>15.226</td></tr><tr><td>25</td><td>15.223</td><td>15.228</td><td>15.224</td></tr><tr><td>30</td><td>15.222</td><td>15.228</td><td>15.224</td></tr><tr><td>40</td><td>15.222</td><td>15.228</td><td>15.224</td></tr><tr><td>55</td><td>15.221</td><td>15.228</td><td>15.225</td></tr><tr><td>60</td><td>15.220</td><td>15.227</td><td>15.225</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Temperature	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]	[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-30	15.237	15.241	15.237	-20	15.232	15.236	15.233	-10	15.228	15.233	15.229	0	15.226	15.231	15.227	10	15.224	15.229	15.226	25	15.223	15.228	15.224	30	15.222	15.228	15.224	40	15.222	15.228	15.224	55	15.221	15.228	15.225	60	15.220	15.227	15.225	—	—	—	—
Temperature	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]																																																				
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																				
-30	15.237	15.241	15.237																																																				
-20	15.232	15.236	15.233																																																				
-10	15.228	15.233	15.229																																																				
0	15.226	15.231	15.227																																																				
10	15.224	15.229	15.226																																																				
25	15.223	15.228	15.224																																																				
30	15.222	15.228	15.224																																																				
40	15.222	15.228	15.224																																																				
55	15.221	15.228	15.225																																																				
60	15.220	15.227	15.225																																																				
—	—	—	—																																																				
Object		-15V0.05A																																																					
1. Graph		2. Values																																																					
<div><div><div>△</div><div>Input Volt. 9.0V</div></div><div><div>□</div><div>Input Volt. 12.0V</div></div><div><div>○</div><div>Input Volt. 18.0V</div></div></div> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>		<table><tr><th>Temperature</th><th>Input Volt. 9.0[V]</th><th>Input Volt. 12.0[V]</th><th>Input Volt. 18.0[V]</th></tr><tr><th>[°C]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>-30</td><td>-15.248</td><td>-15.249</td><td>-15.243</td></tr><tr><td>-20</td><td>-15.244</td><td>-15.246</td><td>-15.241</td></tr><tr><td>-10</td><td>-15.241</td><td>-15.243</td><td>-15.238</td></tr><tr><td>0</td><td>-15.239</td><td>-15.241</td><td>-15.236</td></tr><tr><td>10</td><td>-15.237</td><td>-15.239</td><td>-15.234</td></tr><tr><td>25</td><td>-15.234</td><td>-15.237</td><td>-15.231</td></tr><tr><td>30</td><td>-15.234</td><td>-15.236</td><td>-15.231</td></tr><tr><td>40</td><td>-15.232</td><td>-15.235</td><td>-15.230</td></tr><tr><td>55</td><td>-15.229</td><td>-15.233</td><td>-15.228</td></tr><tr><td>60</td><td>-15.229</td><td>-15.233</td><td>-15.227</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Temperature	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]	[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-30	-15.248	-15.249	-15.243	-20	-15.244	-15.246	-15.241	-10	-15.241	-15.243	-15.238	0	-15.239	-15.241	-15.236	10	-15.237	-15.239	-15.234	25	-15.234	-15.237	-15.231	30	-15.234	-15.236	-15.231	40	-15.232	-15.235	-15.230	55	-15.229	-15.233	-15.228	60	-15.229	-15.233	-15.227	—	—	—	—
Temperature	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]																																																				
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																				
-30	-15.248	-15.249	-15.243																																																				
-20	-15.244	-15.246	-15.241																																																				
-10	-15.241	-15.243	-15.238																																																				
0	-15.239	-15.241	-15.236																																																				
10	-15.237	-15.239	-15.234																																																				
25	-15.234	-15.237	-15.231																																																				
30	-15.234	-15.236	-15.231																																																				
40	-15.232	-15.235	-15.230																																																				
55	-15.229	-15.233	-15.228																																																				
60	-15.229	-15.233	-15.227																																																				
—	—	—	—																																																				
Note: Slanted line shows the range of the rated ambient temperature.																																																							
(注)斜線は定格周囲温度範囲を示す。																																																							

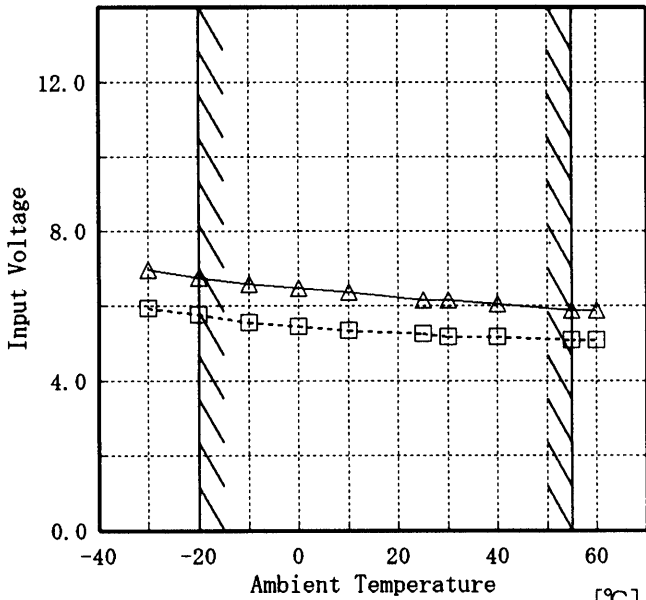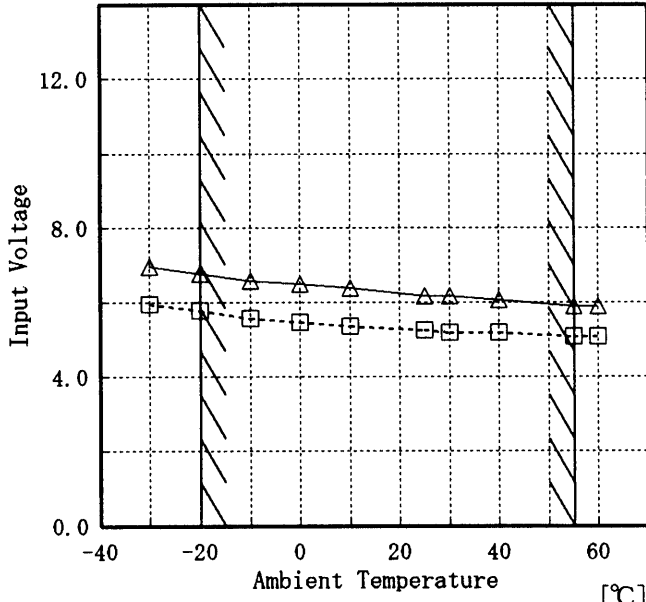COSEL

Model		ZUW1R51215																																					
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧																																						
Object	+15V0.05A																																						
1. Graph		2. Values																																					
[V]	<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div></div>  <p>Ambient Temperature [°C]</p>	<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Input Volt. [V]</th><th>Load 100% Input Volt. [V]</th></tr><tr><td>-30</td><td>6.0</td><td>7.0</td></tr><tr><td>-20</td><td>5.8</td><td>6.8</td></tr><tr><td>-10</td><td>5.6</td><td>6.6</td></tr><tr><td>0</td><td>5.5</td><td>6.5</td></tr><tr><td>10</td><td>5.4</td><td>6.4</td></tr><tr><td>25</td><td>5.3</td><td>6.2</td></tr><tr><td>30</td><td>5.2</td><td>6.2</td></tr><tr><td>40</td><td>5.2</td><td>6.1</td></tr><tr><td>55</td><td>5.1</td><td>5.9</td></tr><tr><td>60</td><td>5.1</td><td>5.9</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]	-30	6.0	7.0	-20	5.8	6.8	-10	5.6	6.6	0	5.5	6.5	10	5.4	6.4	25	5.3	6.2	30	5.2	6.2	40	5.2	6.1	55	5.1	5.9	60	5.1	5.9	—	—	—
Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]																																					
-30	6.0	7.0																																					
-20	5.8	6.8																																					
-10	5.6	6.6																																					
0	5.5	6.5																																					
10	5.4	6.4																																					
25	5.3	6.2																																					
30	5.2	6.2																																					
40	5.2	6.1																																					
55	5.1	5.9																																					
60	5.1	5.9																																					
—	—	—																																					
Object		-15V0.05A																																					
[V]	<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div></div>  <p>Ambient Temperature [°C]</p>	2. Values																																					
		<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Input Volt. [V]</th><th>Load 100% Input Volt. [V]</th></tr><tr><td>-30</td><td>6.0</td><td>7.0</td></tr><tr><td>-20</td><td>5.8</td><td>6.8</td></tr><tr><td>-10</td><td>5.6</td><td>6.6</td></tr><tr><td>0</td><td>5.5</td><td>6.5</td></tr><tr><td>10</td><td>5.4</td><td>6.4</td></tr><tr><td>25</td><td>5.3</td><td>6.2</td></tr><tr><td>30</td><td>5.2</td><td>6.2</td></tr><tr><td>40</td><td>5.2</td><td>6.1</td></tr><tr><td>55</td><td>5.1</td><td>5.9</td></tr><tr><td>60</td><td>5.1</td><td>5.9</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]	-30	6.0	7.0	-20	5.8	6.8	-10	5.6	6.6	0	5.5	6.5	10	5.4	6.4	25	5.3	6.2	30	5.2	6.2	40	5.2	6.1	55	5.1	5.9	60	5.1	5.9	—	—	—
Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]																																					
-30	6.0	7.0																																					
-20	5.8	6.8																																					
-10	5.6	6.6																																					
0	5.5	6.5																																					
10	5.4	6.4																																					
25	5.3	6.2																																					
30	5.2	6.2																																					
40	5.2	6.1																																					
55	5.1	5.9																																					
60	5.1	5.9																																					
—	—	—																																					
Note: Slanted line shows the range of the rated ambient temperature. (注) 斜線は定格周囲温度範囲を示す																																							

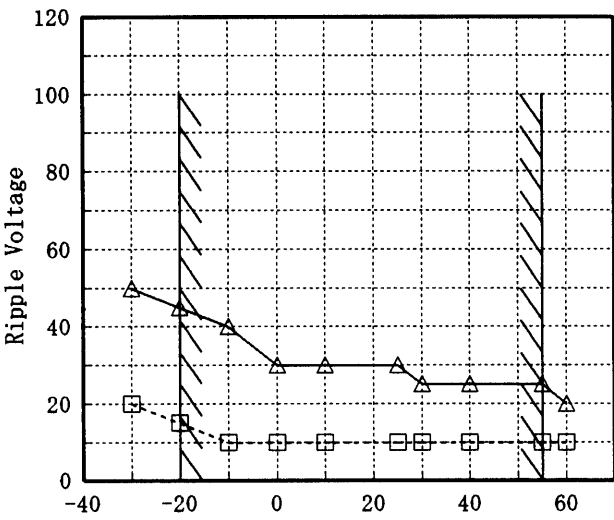COSEL

Model		ZUW1R51215																																					
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																					
Object		+15V0.05A																																					
1. Graph		-----□----- Load 50% -----△----- Load 100%																																					
[mV]																																							
																																							
Ripple Voltage																																							
Ambient Temperature [°C]																																							
Input Volt. 9.0 V																																							
2. Values																																							
<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr><tr><td>-30</td><td>20</td><td>50</td></tr><tr><td>-20</td><td>15</td><td>45</td></tr><tr><td>-10</td><td>10</td><td>40</td></tr><tr><td>0</td><td>10</td><td>30</td></tr><tr><td>10</td><td>10</td><td>30</td></tr><tr><td>25</td><td>10</td><td>30</td></tr><tr><td>30</td><td>10</td><td>25</td></tr><tr><td>40</td><td>10</td><td>25</td></tr><tr><td>55</td><td>10</td><td>25</td></tr><tr><td>60</td><td>10</td><td>20</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-30	20	50	-20	15	45	-10	10	40	0	10	30	10	10	30	25	10	30	30	10	25	40	10	25	55	10	25	60	10	20	—	—	—		
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																					
-30	20	50																																					
-20	15	45																																					
-10	10	40																																					
0	10	30																																					
10	10	30																																					
25	10	30																																					
30	10	25																																					
40	10	25																																					
55	10	25																																					
60	10	20																																					
—	—	—																																					

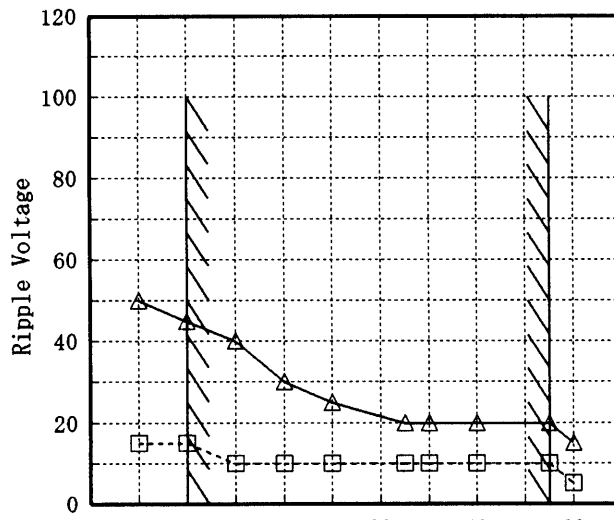Object		-15V0.05A																																					
1. Graph		-----□----- Load 50% -----△----- Load 100%																																					
																																							
Ripple Voltage																																							
Ambient Temperature [°C]																																							
Input Volt. 9.0 V																																							
2. Values																																							
<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr><tr><td>-30</td><td>15</td><td>50</td></tr><tr><td>-20</td><td>15</td><td>45</td></tr><tr><td>-10</td><td>10</td><td>40</td></tr><tr><td>0</td><td>10</td><td>30</td></tr><tr><td>10</td><td>10</td><td>25</td></tr><tr><td>25</td><td>10</td><td>20</td></tr><tr><td>30</td><td>10</td><td>20</td></tr><tr><td>40</td><td>10</td><td>20</td></tr><tr><td>55</td><td>10</td><td>20</td></tr><tr><td>60</td><td>5</td><td>15</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-30	15	50	-20	15	45	-10	10	40	0	10	30	10	10	25	25	10	20	30	10	20	40	10	20	55	10	20	60	5	15	—	—	—		
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																					
-30	15	50																																					
-20	15	45																																					
-10	10	40																																					
0	10	30																																					
10	10	25																																					
25	10	20																																					
30	10	20																																					
40	10	20																																					
55	10	20																																					
60	5	15																																					
—	—	—																																					

Note: Slanted line shows the range of the rated ambient temperature.	
(注)斜線は定格周囲温度範囲を示す。	

COSEL

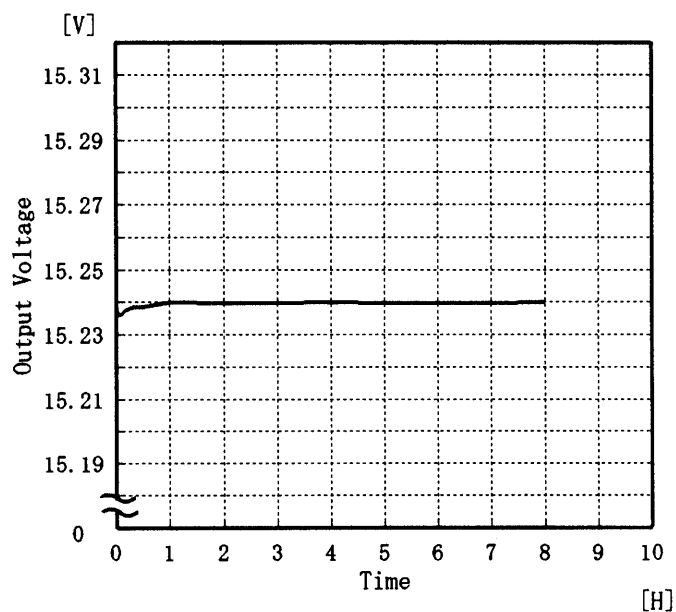
Model ZUW1R51215

Item Time Lapse Drift 経時ドリフト

Temperature 25 °C
Testing Circuitry Figure A

Object +15V0.05A

1. Graph




2. Values

Time since start [H]	Output Voltage [V]
0.0	15.239
0.5	15.239
1.0	15.240
2.0	15.240
3.0	15.240
4.0	15.240
5.0	15.240
6.0	15.240
7.0	15.240
8.0	15.240

Object -15V0.05A

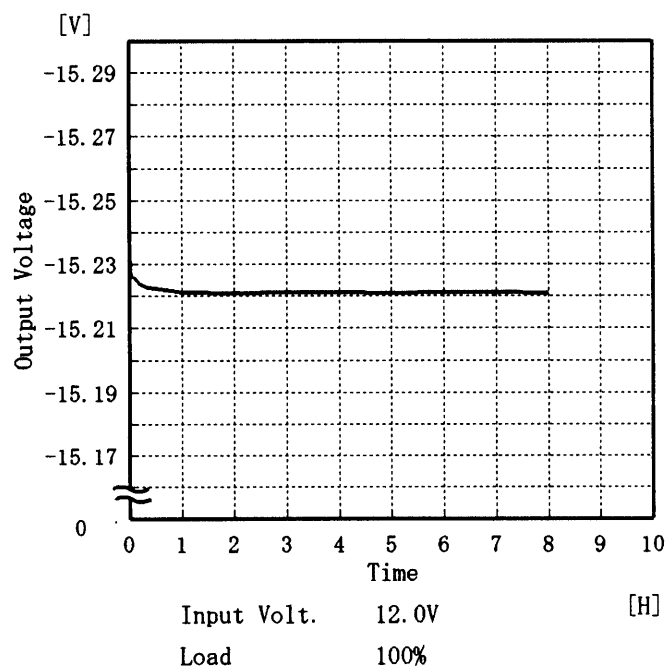1. Graph



2. Values

Time since start [H]	Output Voltage [V]
0.0	-15.235
0.5	-15.223
1.0	-15.221
2.0	-15.221
3.0	-15.221
4.0	-15.221
5.0	-15.221
6.0	-15.221
7.0	-15.221
8.0	-15.221

COSEL

LUCEL

Model	ZUW1R51215
Item	Condensation 結露特性
Object	+15V 0.05A

Testing Circuitry Figure A

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で -10°C に冷却しておき、約1時間後に恒温槽から取り出し、室温 25°C 、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	15.011	5	30
	2	15.102	5	30
	3	15.098	5	30
Load 100 %	1	14.976	25	45
	2	15.002	25	45
	3	14.936	25	45

Input Volt. 12.0 V

COSEL

LOGEL

Model	ZUW1R51215
Item	Condensation 結露特性
Object	-15V 0.05A

Testing Circuitry Figure A

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	-14.987	5	30
	2	-14.975	5	30
	3	-14.996	5	30
Load 100 %	1	-14.856	20	35
	2	-14.888	20	35
	3	-14.905	20	35

Input Volt. 12.0 V

-19-

BC-2018

