

Apr.13,2007

Temperature increase of main components: 主要部品温度上昇

Cosel.co.,ltd.


Model: ZUS348/ZUW348

1. Conditions

- (1) Input :DC 36 ~ 72 [V]
 (2) Output :Rated output
 (3) Mounting method :Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)					Rated temp. [°C]	Reference
			[deg]						
			5V	12V	15V	$\pm 12V$	$\pm 15V$		
1	Transformer	T11	43	39	38	38	34	120	
2	Switching Transistor	TR11	43	40	36	36	36	150	Junction Temp.
3	Rectified Diode(Output)	D51	46	38	38	33	32	150	Junction Temp.
4	Photocoupler	PC11	37	34	33	30	30	125	Junction Temp.
5	Output Choke	L51	38	31	33	26	26	105	
6	Output Capacitor	C54	32	30	28	–	–	125	
7	Output Capacitor	C55,C56	–	–	–	26	26	125	
8									
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									

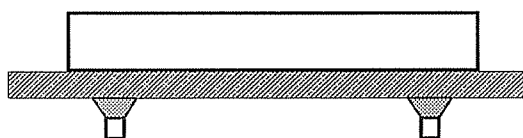

(Side view)

Fig.1.1 Mounting method
(Normal position)