



# RADIATED EMISSION

Model Name : DBS400B18

Model No. :

Serial No. :

Detector : PEAK/QP

Points : 4

Polarization : Hori. & Vert.

Limit1: [EN 55022] Class B<3m>


Temperature : 25deg C

Humidity : 45%

Comment : Vin=AC230V,Io=100%

Date : 2000/7/19 22:52

EMI Receiver(s) : R3261A,ESPC

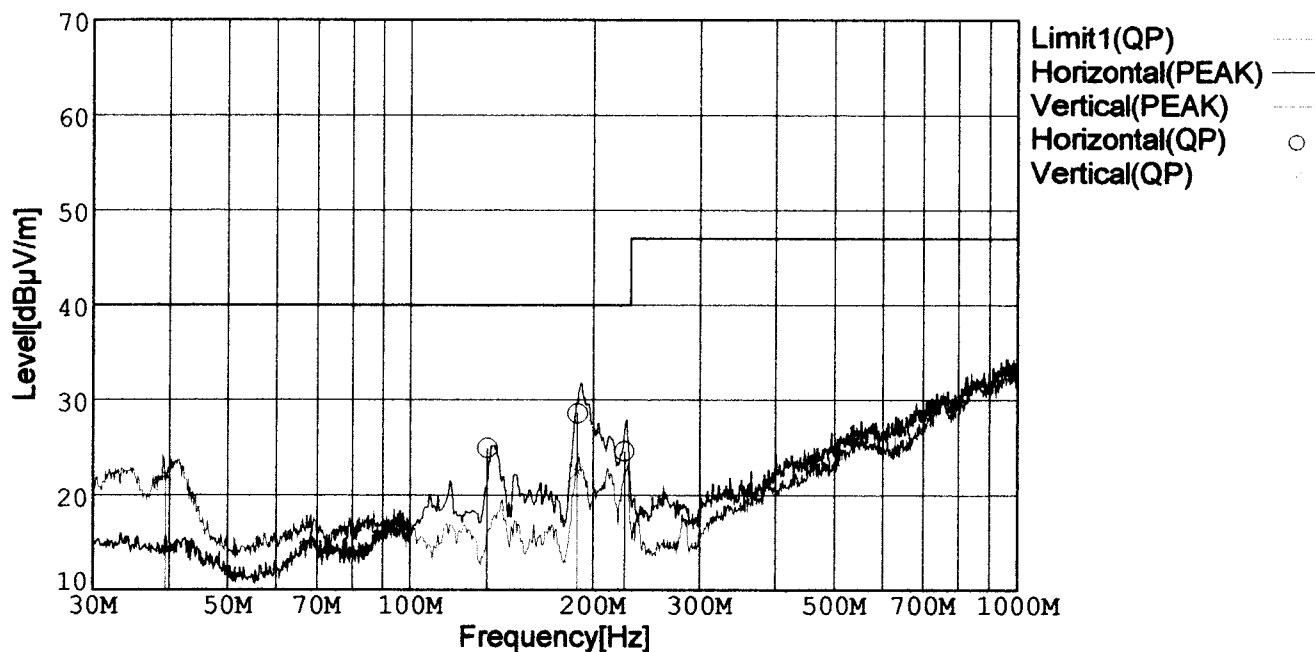

Frequency [MHz]	Meter Reading [dBμV]	Antenna Factor[dB]	Cable Loss[dB]	Level [dBμV/m]	Angle[°]	Height [cm]	Pola.	Limit [dBμV/m]	Margin [dB]
188.433	43.7	-27.5	12.4	28.6	41	100	Hori.	40.0	11.4
224.937	39.8	-27.4	12.2	24.6	350	104	Hori.	40.0	15.4
133.735	38.6	-27.9	14.2	24.9	64	159	Hori.	40.0	15.1
188.433	40.8	-27.5	9.1	22.4	7	104	Vert.	40.0	17.6
39.387	35.5	-28.7	15.3	22.1	5	114	Vert.	40.0	17.9

7/19/00

# Conditions


Date 2000/8/11

Test : RADIATED EMISSION  
Model Name : DBS400B

## ○Photographs of Test Set-Up



## ○Testing circuitry

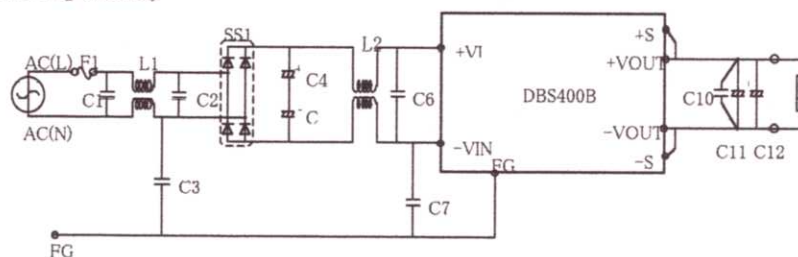

- F1 : CES15 (SOC:15A 250V)
- C1、C2 : CFJC22E474M (NITSUKO:0.47  $\mu$ F 250V)
- C6 : CFJC22E224M (NITSUKO:0.22  $\mu$ F 250V)
- C4、C5 : LGQ2E102M (NICHICON:1000  $\mu$ F 250V)
- C3、C7 : DE1207-2E332M-KH (MURATA:3300pF 250V)
- L1 : SC-05-20J (TOKIN:2.0mH min 5.0A)
- L2 : SS28H-25045 (TOKIN:4.5mH min 2.5A)
- SS1 : D25XB60 (SINDENGEN:25A 600V)
- C10 : MDD21H104M5 (NITSUKO:0.1  $\mu$ F 50V)
- C11、C12 : Table 1 (NIPPON CHEMI-CON)

Table 1

MODEL	C11	C12
DBS400B03	LZX10VB3300MK25	LZX10VB3300MK25
DBS400B05, 07	LZX10VB2200MK20	LZX10VB2200MK20
DBS400B12	LZX25VB1000MK20	LZX25VB1000MK20
DBS400B15, 18	LZX35VB1000MK25	LZX35VB1000MK25
DBS400B24, 28	LZY50VB820MK40	-

Fig 1. Testing circuitry



# LINE CONDUCTION

Model Name : DBS400B18

Model No. :

Serial No. :

Detector : PEAK/QP/Ave.

Points : 4

Line Mode : VA/VB

Limit1: [EN 55022] Class B(QP)

Limit2: [EN 55022] Class B(Ave.)


Temperature : 25deg C

Humidity : 45%

Comment : Vin=AC230V,Io=100%

Date : 2000/7/20 0:03

EMI Receiver(s) : R3261A,ESPC

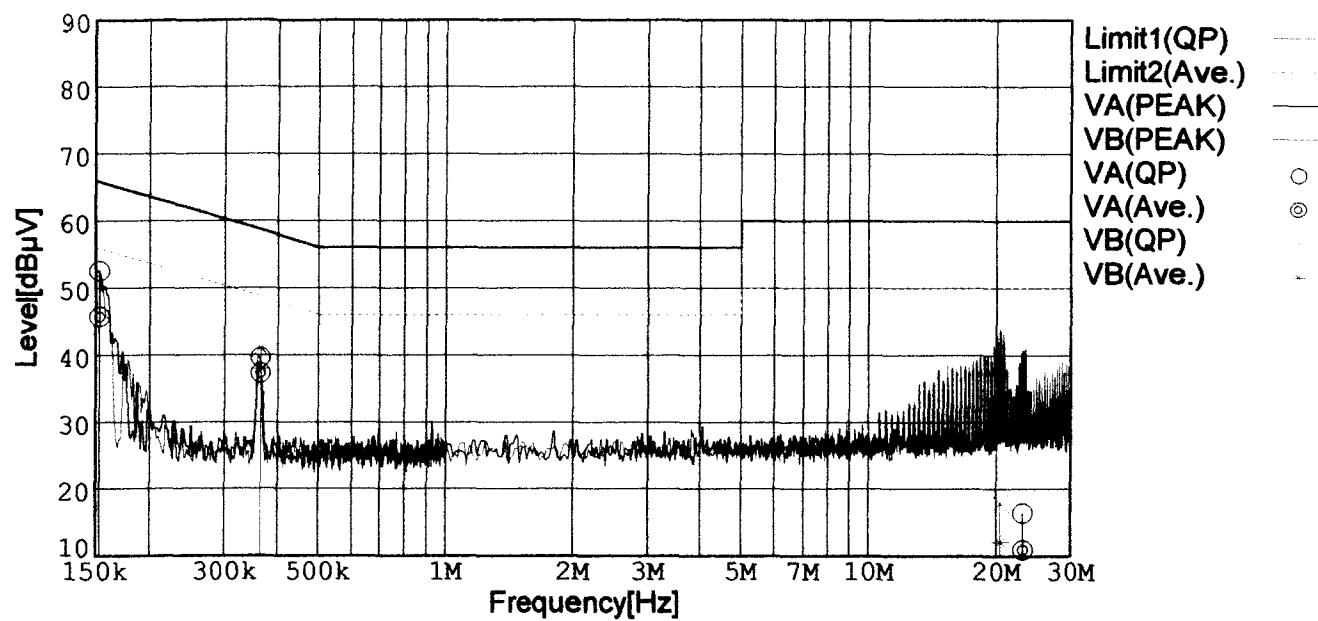

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.1528	42.2	35.4	10.3	52.5	45.7	VA	65.8	55.8	13.3	10.1
0.3630	29.2	26.9	10.3	39.5	37.2	VA	58.7	48.7	19.2	11.5
0.3630	30.7	27.6	10.3	41.0	37.9	VB	58.7	48.7	17.7	10.8

