



RADIATED EMISSION

Model Name : FCA75F-24

Model No. :

Serial No. :

Temperature : 25deg C

Detector : PEAK/QP

Points : 6

Polarization : Hori. & Vert.

Limit1: [CISPR 11] Class A Group 1<3m>


Humidity : 45%

Comment : AC240V, Io=100%

Tested by : T.Okamoto

Date : 2000/5/19 17:26

EMI Receiver(s) : R3361B,ESPC

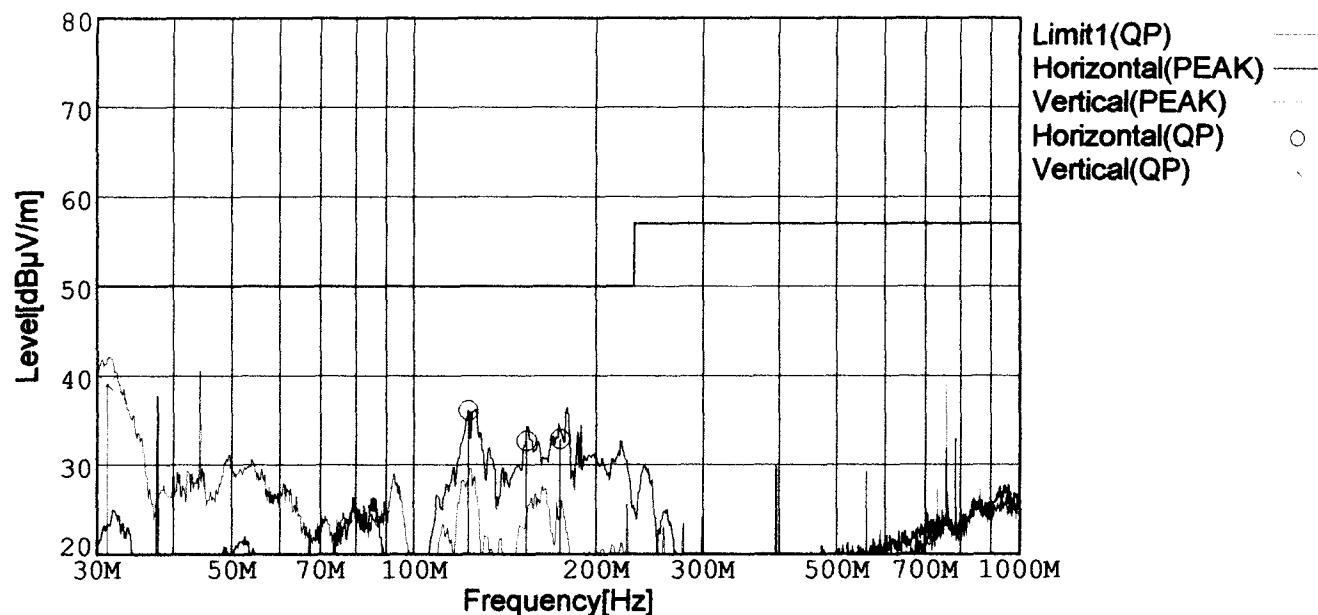

Frequency [MHz]	Meter Reading [dBμV]	Antenna Factor[dB]	Cable Loss[dB]	Level [dBμV/m]	Angle[°]	Height [cm]	Pola.	Limit [dBμV/m]	Margin [dB]
174.297	47.9	-27.7	12.7	32.9	214	156	Hori.	50.0	17.1
122.570	50.0	-28.0	14.1	36.1	220	153	Hori.	50.0	13.9
153.455	47.0	-27.8	13.5	32.7	227	153	Hori.	50.0	17.3
31.183	51.4	-29.0	16.6	39.0	66	101	Vert.	50.0	11.0



RADIATED EMISSION

Model Name : FCA75F-24

Model No. :

Serial No. :

Temperature : 25deg C

Detector : PEAK/QP

Points : 5

Polarization : Hori. & Vert.

Limit1: [CISPR 11] Class A Group 1<3m>


Humidity : 45%

Comment : AC480V, Io=100%

Tested by : T.Okamoto

Date : 2000/5/19 16:26

EMI Receiver(s) : R3361B,ESPC

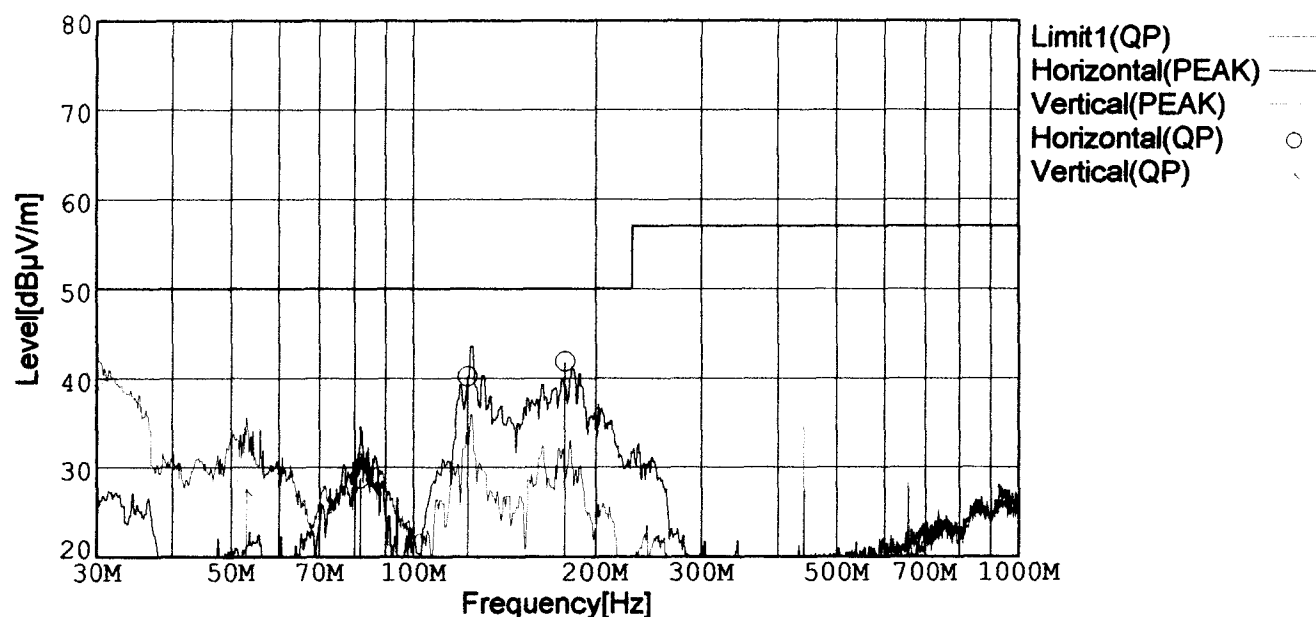

Frequency [MHz]	Meter Reading [dBμV]	Antenna Factor [dB]	Cable Loss [dB]	Level [dBμV/m]	Angle [°]	Height [cm]	Pola.	Limit [dBμV/m]	Margin [dB]
122.983	54.1	-28.0	14.1	40.2	200	158	Hori.	50.0	9.8
178.609	57.2	-27.6	12.2	41.8	187	144	Hori.	50.0	8.2
30.048	51.1	-29.0	16.8	38.9	33	131	Vert.	50.0	11.1



LINE CONDUCTION

Model Name : FCA75F-24

Model No. :

Serial No. :

Temperature : 25deg C

Detector : PEAK/QP/Ave.

Points : 1

Line Mode : VA

Limit1: [CISPR Pub11] Class A Gr.1(QP)

Limit2: [CISPR Pub11] Class A Gr.1(Ave.)


Humidity : 45%

Comment : AC240V,lo=100%

Tested by : T.Okamoto

Date : 2000/7/10 21:05

EMI Receiver(s) : R3261A,ESPC

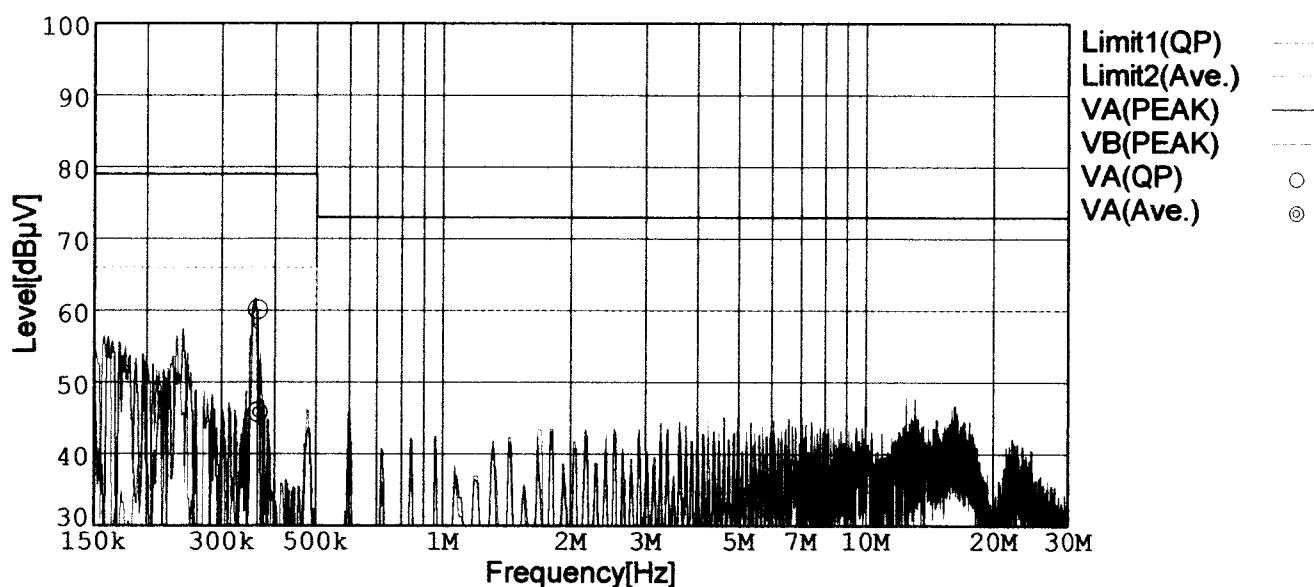

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.3624	49.8	35.5	10.3	60.1	45.8	VA	79.0	66.0	18.9	20.2



LINE CONDUCTION

Model Name : FCA75F-24

Model No. :

Serial No. :

Temperature : 25deg C

Detector : PEAK/QP/Ave.

Points : 3

Line Mode : VA/VB

Limit1: [CISPR Pub11] Class A Gr.1(QP)

Limit2: [CISPR Pub11] Class A Gr.1(Ave.)


Humidity : 45%

Comment : AC480V, Io=100%

Tested by : T.Okamoto

Date : 2000/7/10 20:56

EMI Receiver(s) : R3261A,ESPC

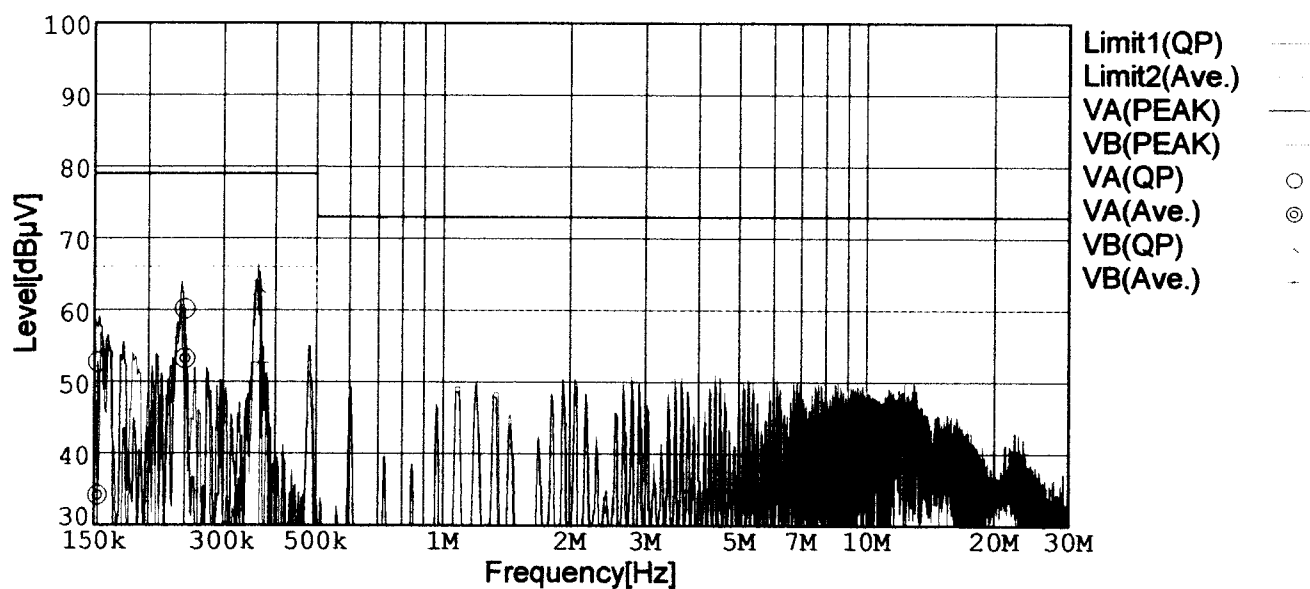

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.1526	42.4	23.8	10.3	52.7	34.1	VA	79.0	66.0	26.3	31.9
0.2446	49.8	42.9	10.3	60.1	53.2	VA	79.0	66.0	18.9	12.8
0.3664	52.7	42.3	10.3	63.0	52.6	VB	79.0	66.0	16.0	13.4