





DATA SHEET		Date	21-May-26
Model	FDA50F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	R.Nakanishi

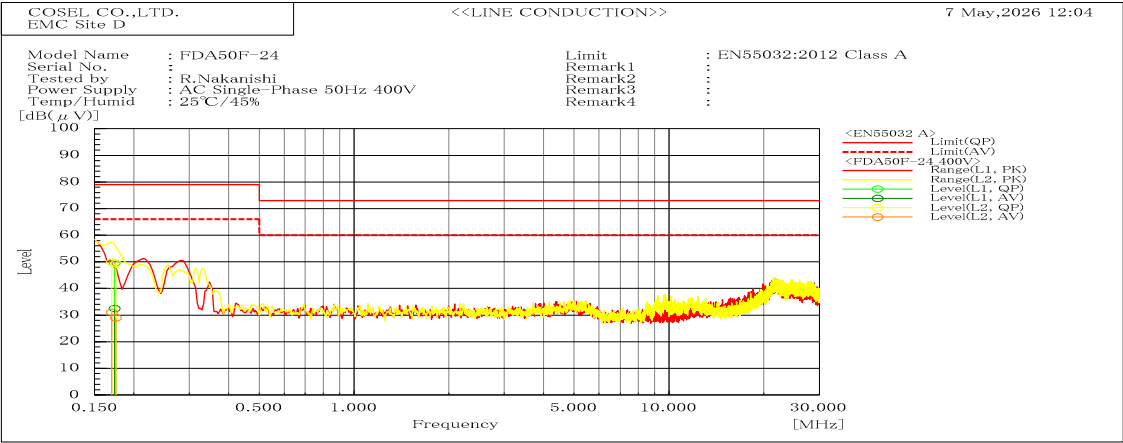

Frequency MHz	Line	Level		Limit		Margin		Pass/Fail	Remark
		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.174	L1	49.5	32.5	79	66	29.5	33.5	Pass	
0.175	L2	49.3	29	79	66	29.7	37	Pass	
0.17	L2	49.9	31.1	79	66	29.1	34.9	Pass	

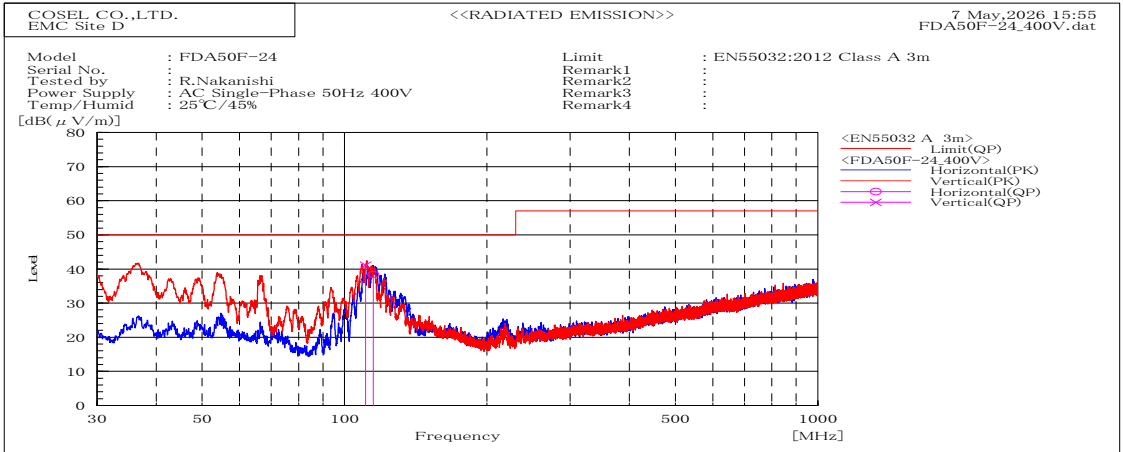


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
110.772	V	Stable	41.1	50	8.9	Pass	140.8	112.9	
115.104	H	Stable	38.4	50	11.6	Pass	169.9	159.2	




DATA SHEET		Date	21-May-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	45 %RH
	Line conduction & Radiated emission	Tested by	R.Nakanishi

1. Line conduction

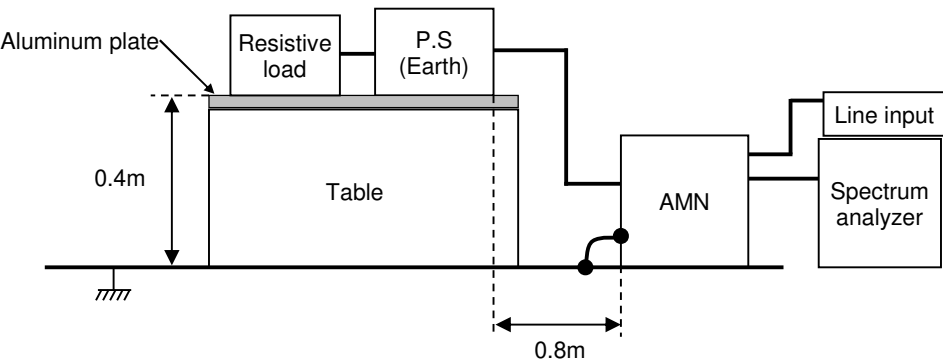

2. Radiated emission

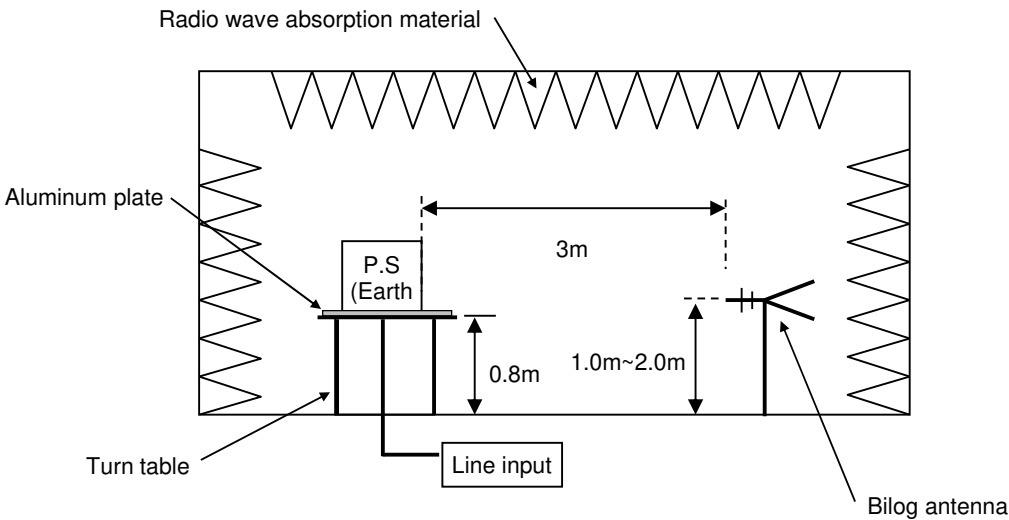




Conditions

Test : EMI
Model Name: FDA50F-24

○Photographs of Test Set-Up

1.LINE CONDUCTION

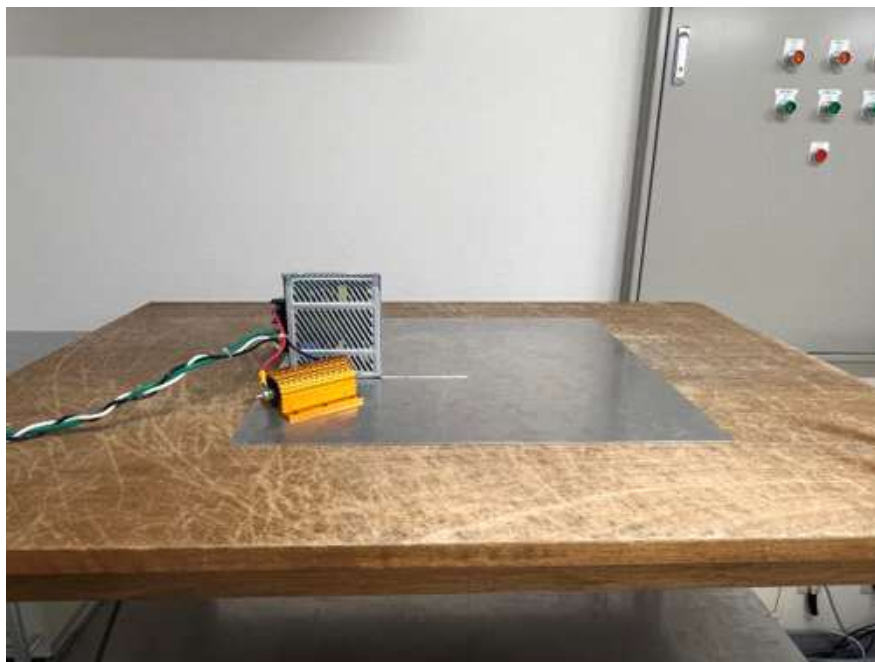

2.RADIATED EMISSION

