



## DATA SHEET

Model		FETA3000BA-48	Date	26-Nov-19
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	T.Yamamoto

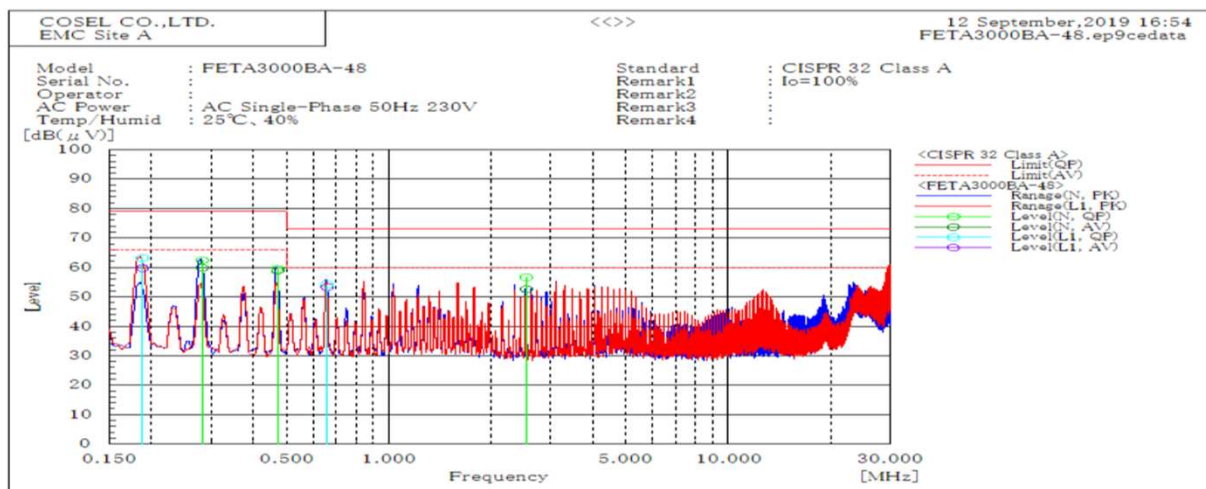


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.282	N	62.4	59.9	79	66	16.6	6.1	Pass	
0.471	N	59.5	58.9	79	66	19.5	7.1	Pass	
2.541	N	56.6	52.6	73	60	16.4	7.4	Pass	
0.188	L1	63.2	59.8	79	66	15.8	6.2	Pass	
0.659	L1	54.3	53.3	73	60	18.7	6.7	Pass	

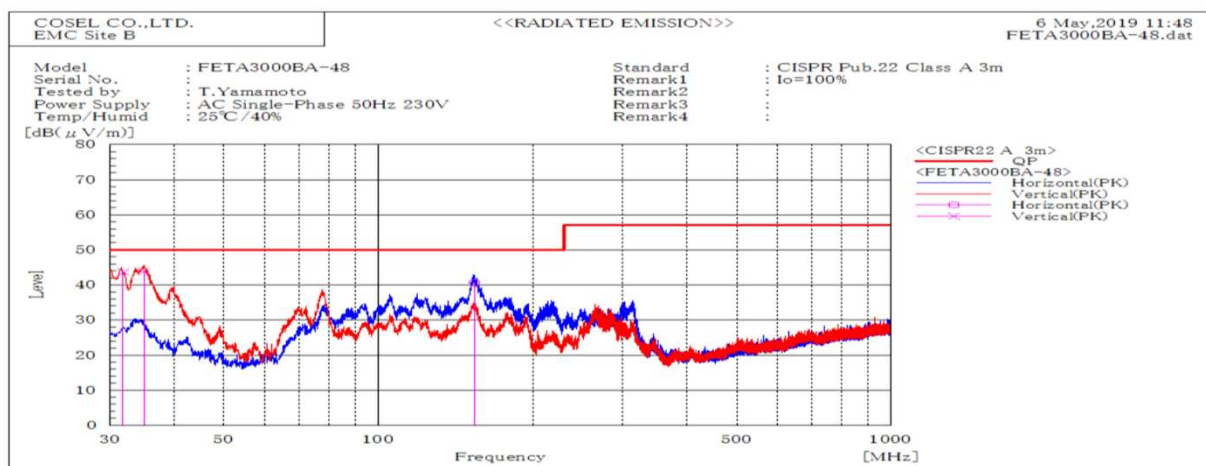


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
153.97	H	Stable	40.6	50	9.4	Pass	200	74.1	
35.037	V	Stable	43.9	50	6.1	Pass	100	0	
31.815	V	Stable	43.7	50	6.3	Pass	100.2	341.5	

DATA SHEET		Date	26-Nov-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Yamamoto

### 1. Line conduction

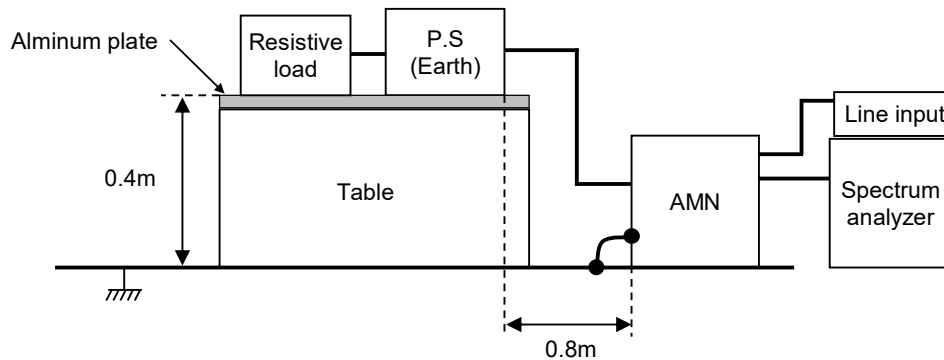

### 2. Radiated emission

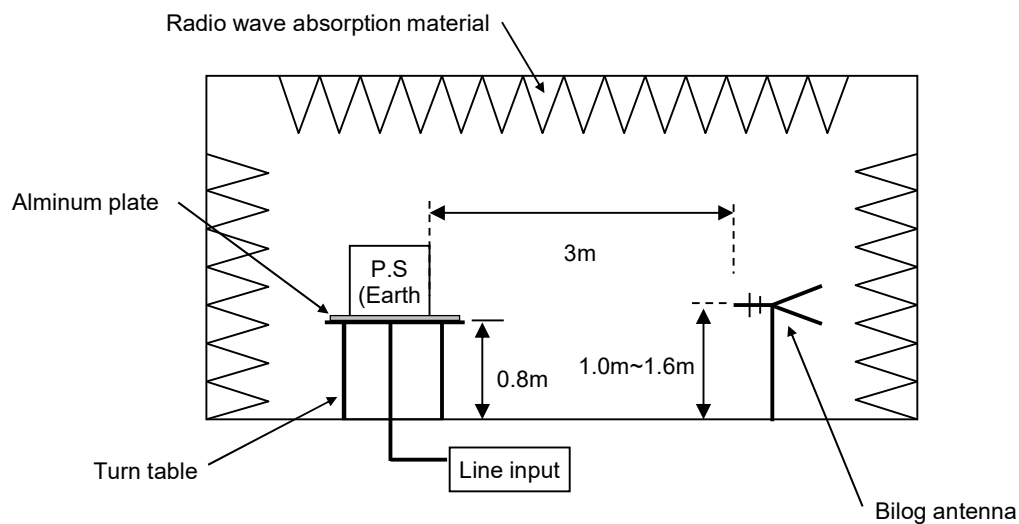


## Conditions

Test : EMI  
Model Name : FETA3000BA-48

## O Photographs of test set-up

### 1.LINE CONDUCTION

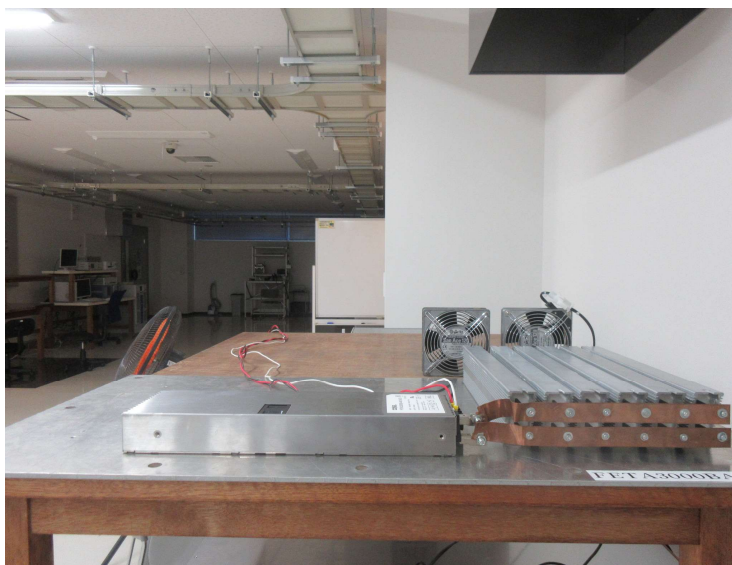

### 2.RADIATED EMISSION

