



DATA SHEET		Date	29-May-23
Model	FETA3000BC-250	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	Y.Fukumura

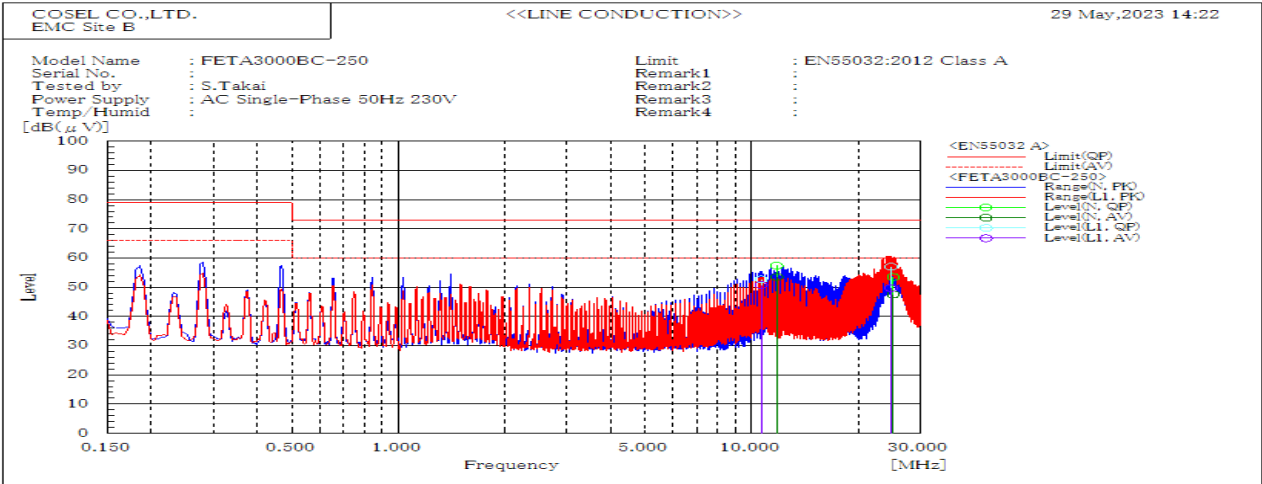


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
25.13	N	53.5	47.5	73	60	19.5	12.5	Pass	
11.767	N	57.4	53.5	73	60	15.6	6.5	Pass	
24.754	L1	57	49.7	73	60	16	10.3	Pass	
10.636	L1	52.7	50.8	73	60	20.3	9.2	Pass	

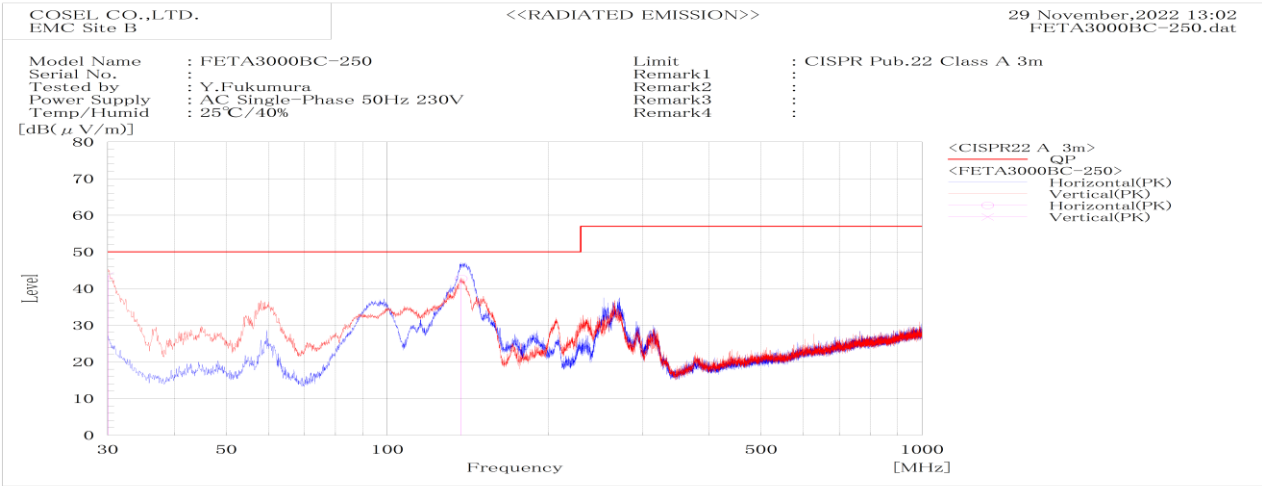


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
30.013	V	Stable	43.5	50	6.5	Pass	100.2	350	
137.554	H	Stable	42.7	50	7.3	Pass	199.7	0	

DATA SHEET		Date	29-May-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Fukumura

1. Line conduction

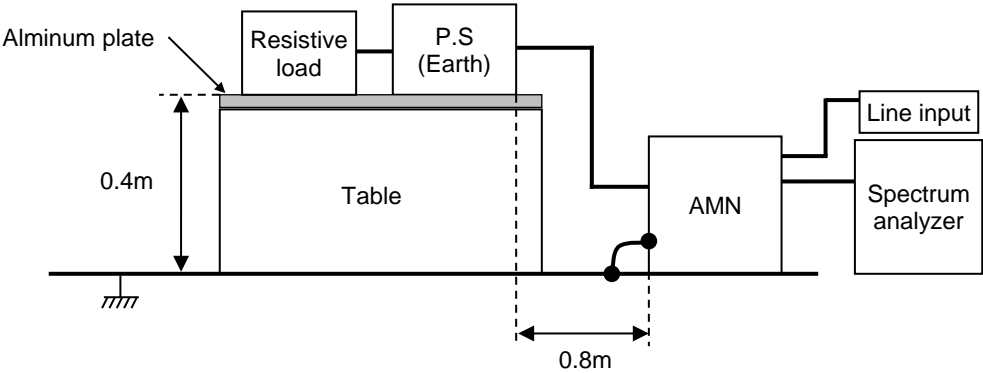

2. Radiated emission

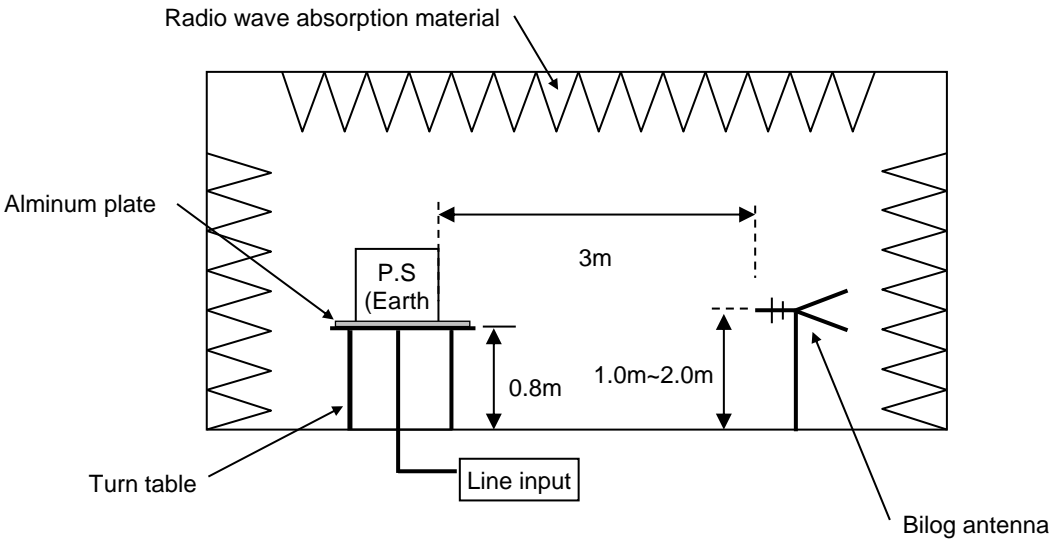


Conditions

Test : EMI
Model Nam: FETA3000BC-250

Pthotographs of Test Set-Up

1.LINE CONDUCTION

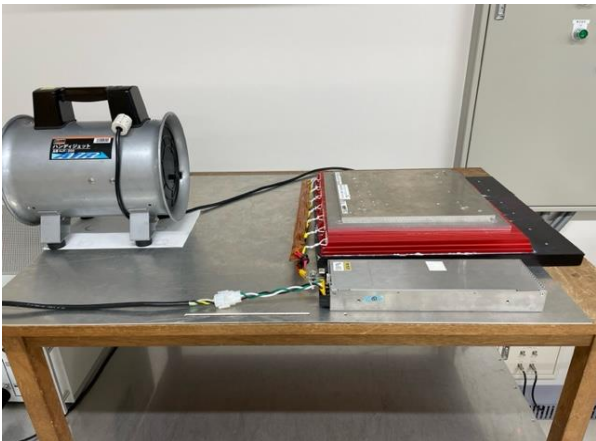

2.RADIATED EMISSION

