



DATA SHEET		Date	03-Jul-23
Model	FETA7000ST-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Watanabe

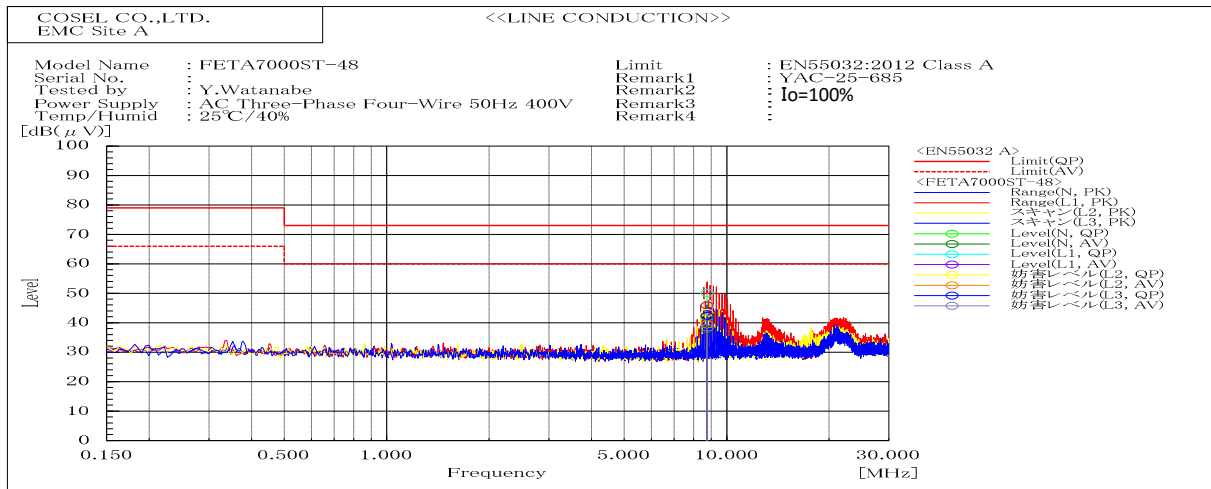


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
8.753	L1	50.1	45.9	73	60	22.9	14.1	Pass	
8.755	L2	43.4	39.4	73	60	29.6	20.6	Pass	
8.754	L3	42.3	38.3	73	60	30.7	21.7	Pass	
8.754	N	41.9	37.8	73	60	31.1	22.2	Pass	

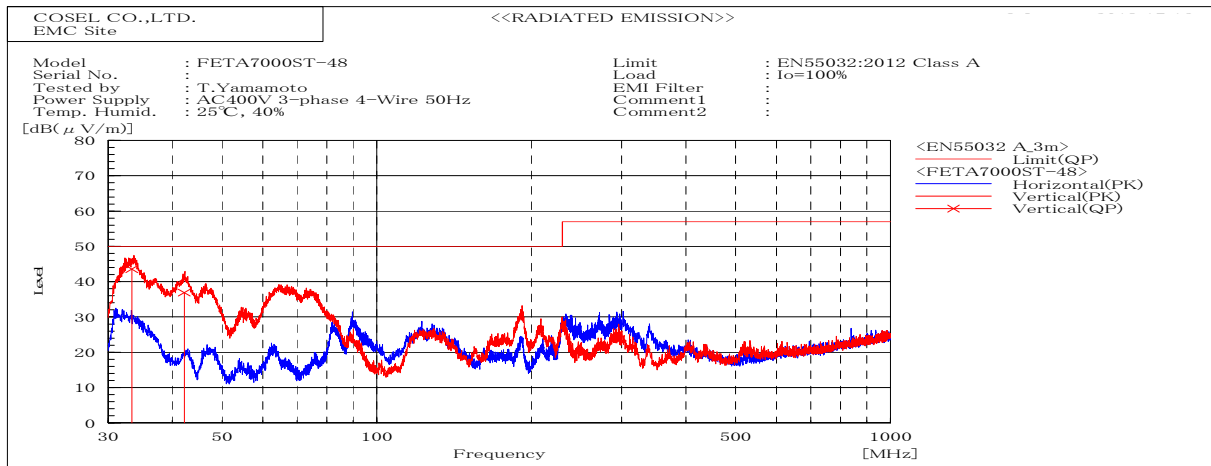


Frequency	Polarization	Stability	Reading	Space	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV)	Loss	dB(μV/m)	dB(μV/m)	dB(μV/m)		cm	deg	
33.353	V	Stable	57.8	-14.2	43.6	50.0	6.4	Pass	104	236	
42.204	V	Stable	53.3	-16.4	36.9	50.0	13.1	Pass	106	11	

DATA SHEET		Date	03-Jul-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Watanabe

### 1. Line conduction

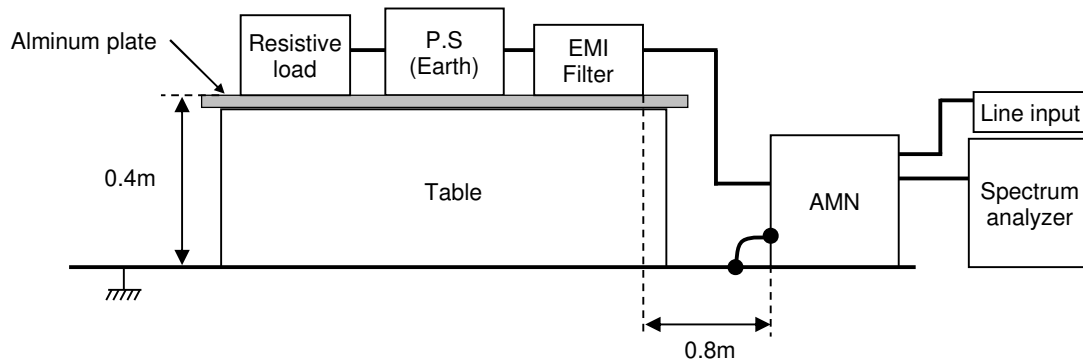

### 2. Radiated emission

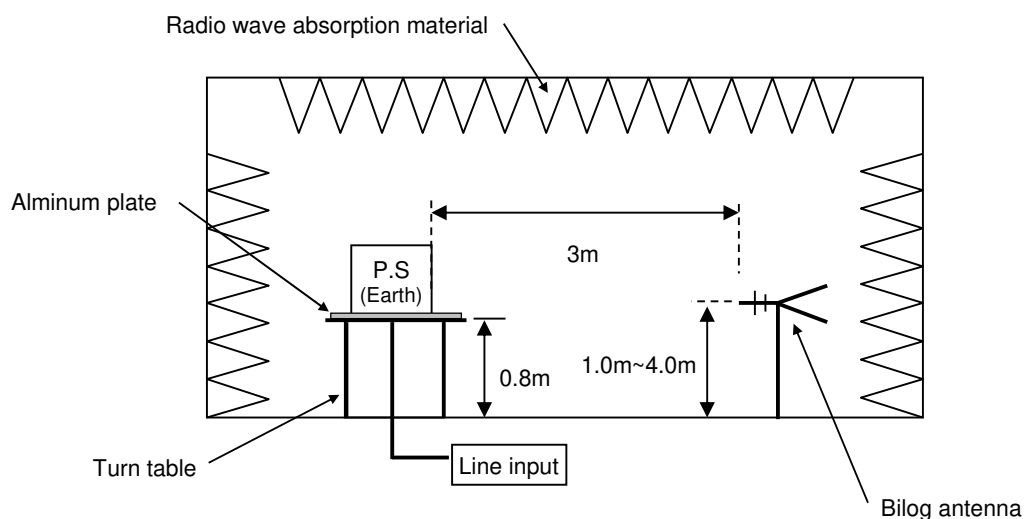


## Conditions

Test : EMI  
Model Name : FETA7000ST-48

## Pthotographs of Test Set-Up

### 1. LINE CONDUCTION

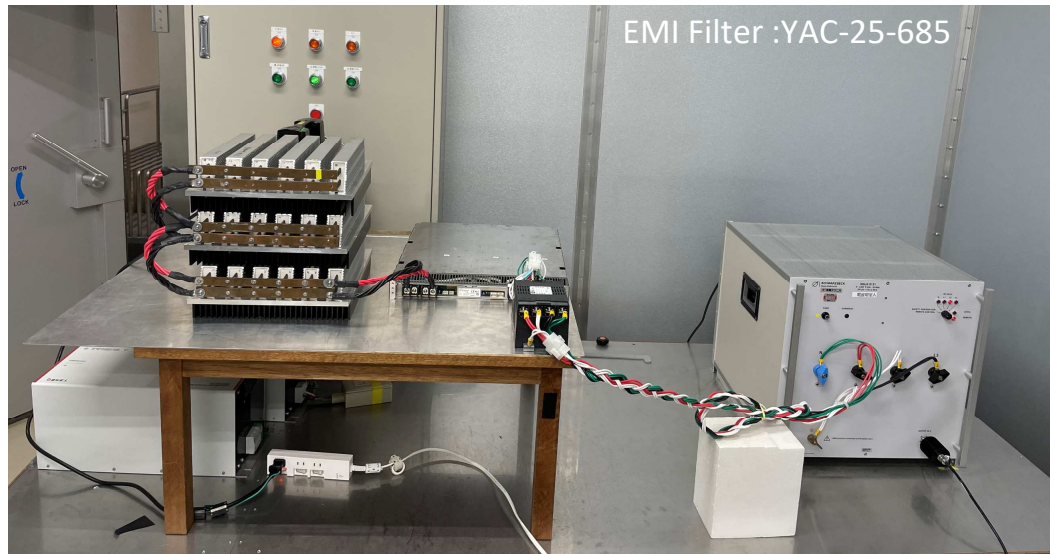

### 2. RADIATED EMISSION

