



DATA SHEET		Date	11-May-18
Model	GHA300F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

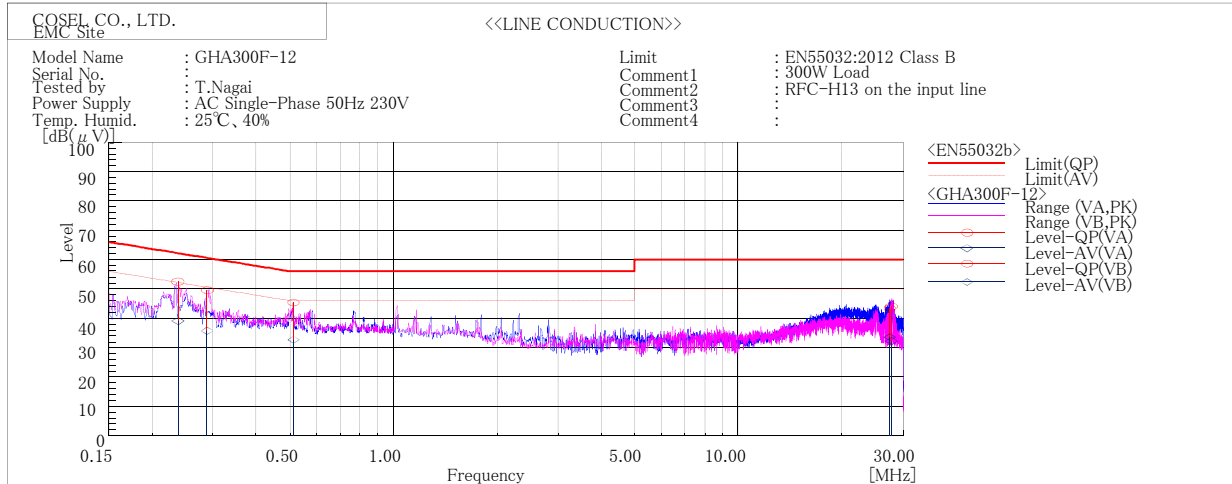


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.23729	VB	52.5	39.1	62.2	52.2	9.7	13.1	Pass	
0.28872	VB	49.5	35.8	60.6	50.6	11.1	14.8	Pass	
0.51287	VB	45.4	32.7	56	46	10.6	13.3	Pass	
27.46935	VA	43.4	33.6	60	50	16.6	16.4	Pass	
27.8128	VB	44	32.3	60	50	16	17.7	Pass	

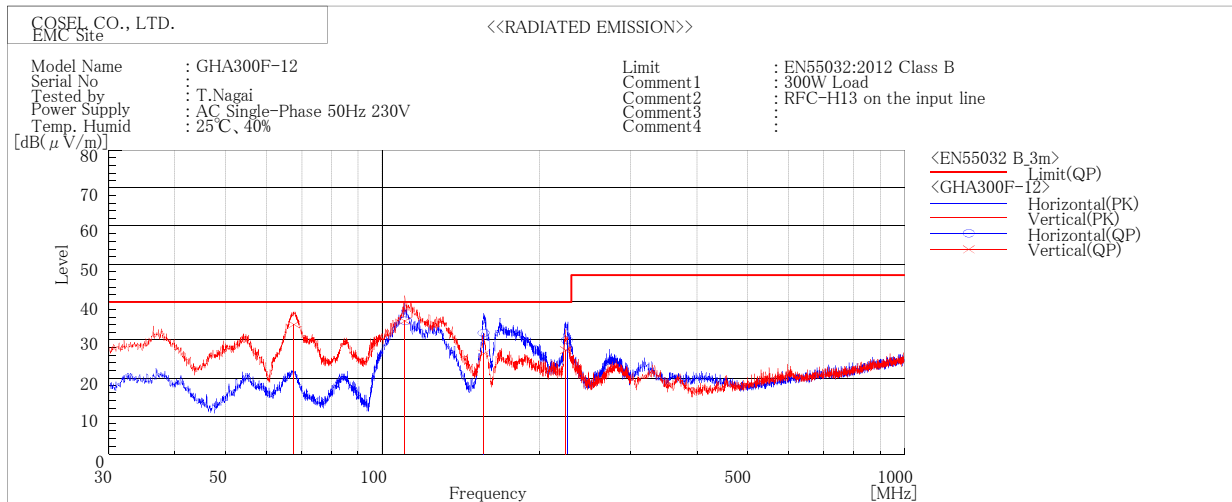

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
67.675	V	Stable	34.1	40.0	5.9	Pass	100	105	
110.625	H	Stable	35.1	40.0	4.9	Pass	152	179	
110.478	V	Stable	35.0	40.0	5.0	Pass	130	93	
156.249	H	Stable	31.9	40.0	8.1	Pass	150	164	
224.809	V	Stable	27.3	40.0	12.7	Pass	152	82	
225.499	H	Stable	30.0	40.0	10.0	Pass	138	125	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

## 1. Line conduction

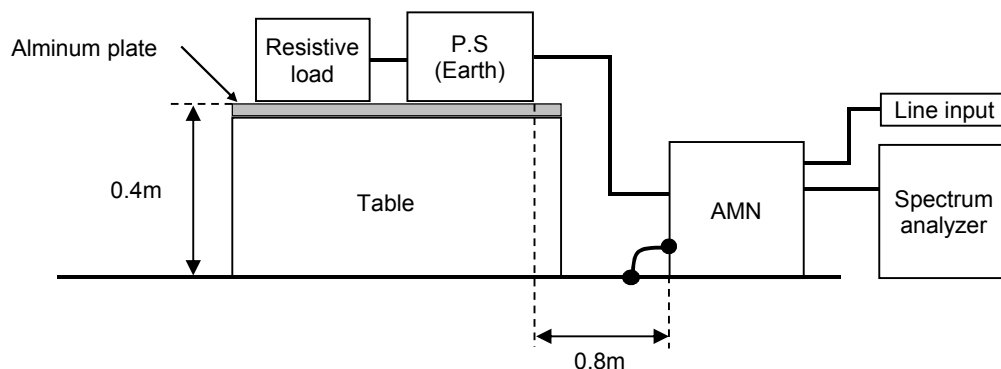

## 2. Radiated emission

