



DATA SHEET		Date	11-May-18
Model	GHA300F-12-SNF	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

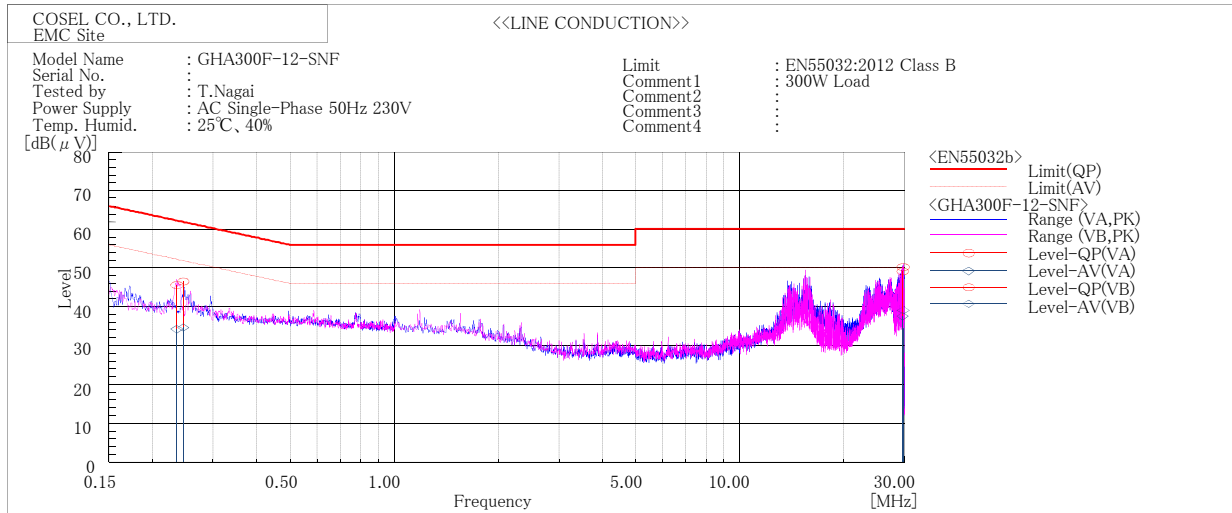

Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.23532	VB	45.6	34.2	62.3	52.3	16.7	18.1	Pass	
0.24567	VA	46.5	34.6	61.9	51.9	15.4	17.3	Pass	
29.62825	VA	49.2	37.5	60	50	10.8	12.5	Pass	
29.78255	VB	50.3	39.1	60	50	9.7	10.9	Pass	

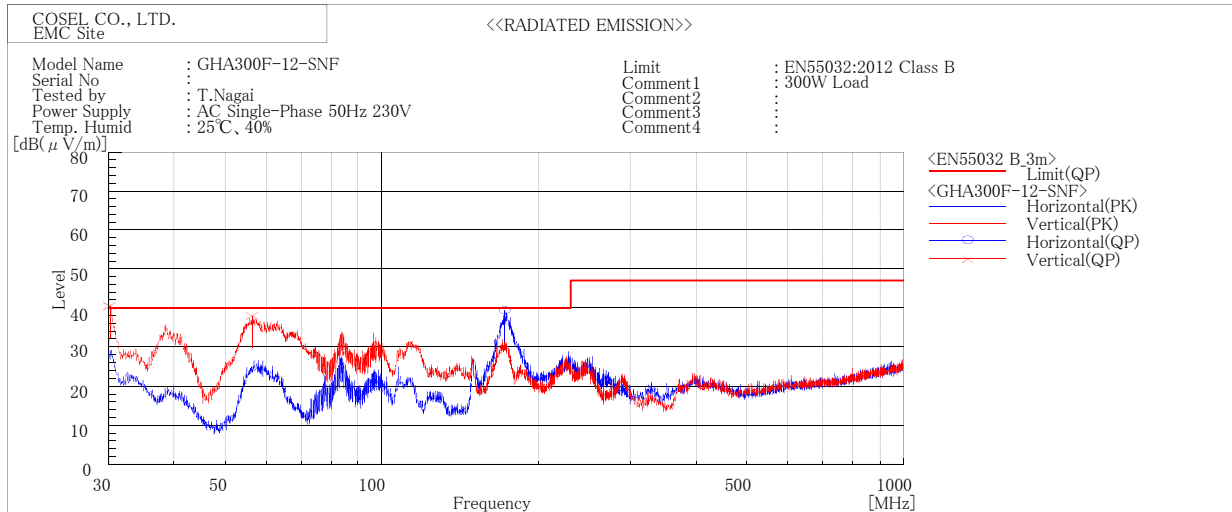


Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
30.057	V	Stable	36.9	40.0	3.1	Pass	100	343	
56.556	V	Stable	34.3	40.0	5.7	Pass	101	325	
172.100	H	Stable	34.7	40.0	5.3	Pass	136	244	

## DATA SHEET

		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

### 1. Line conduction

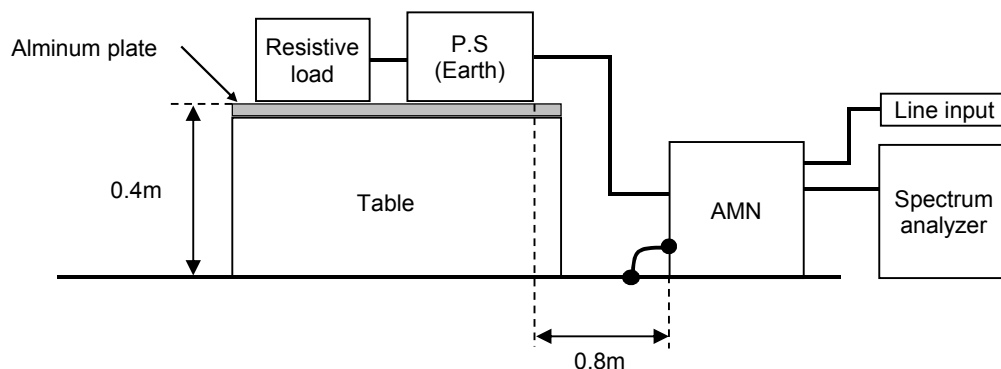

### 2. Radiated emission

