



DATA SHEET		Date	11-May-18
Model	GHA300F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

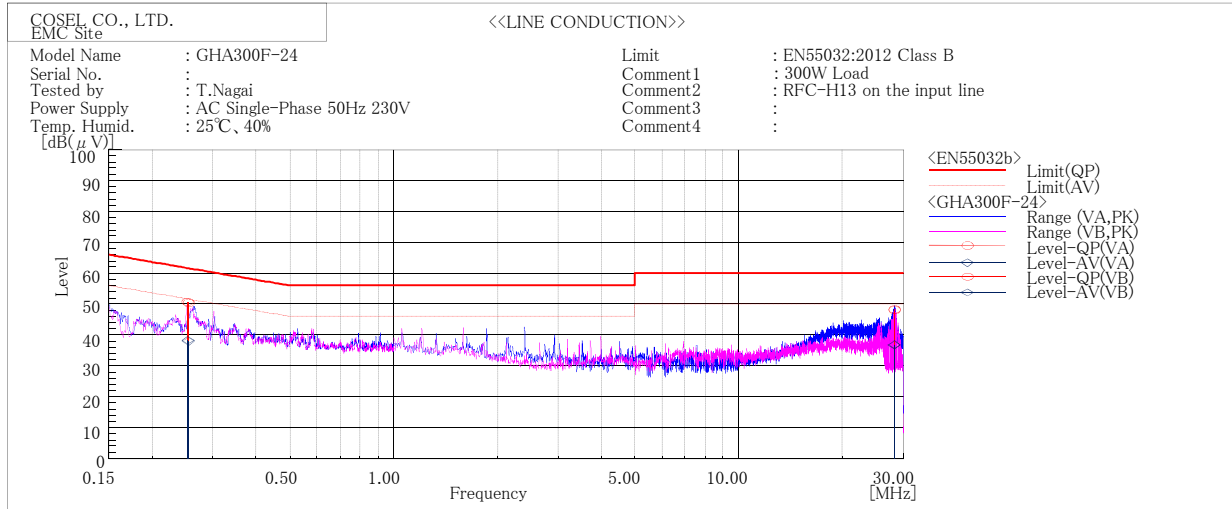


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.25354	VB	50.8	38.3	61.6	51.6	10.8	13.3	Pass	
0.25452	VA	50.4	37.9	61.6	51.6	11.2	13.7	Pass	
28.2704	VA	48.1	36.7	60	50	11.9	13.3	Pass	
28.34545	VA	48.3	36.9	60	50	11.7	13.1	Pass	

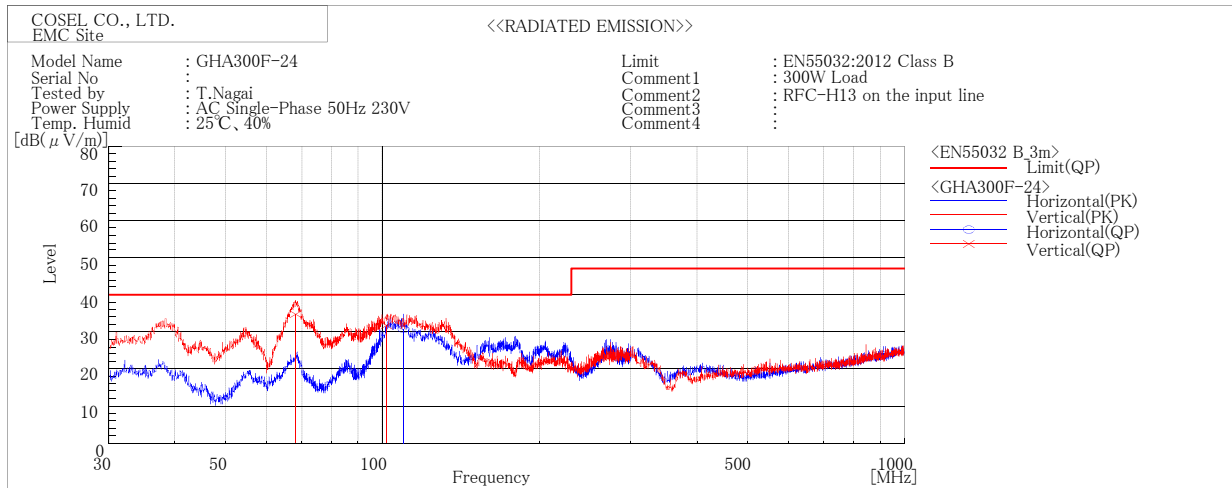

Frequency MHz	Polarization	Stability	Reading dB(μV)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
68.162	V	Stable	34.7	40.0	5.3	Pass	102	148	
101.761	V	Stable	31.8	40.0	8.2	Pass	105	274	
109.919	H	Stable	30.7	40.0	9.3	Pass	156	172	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

## 1. Line conduction

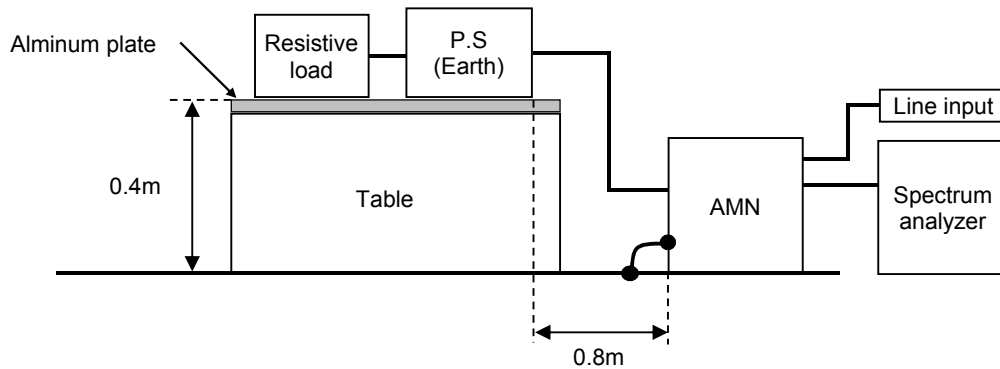

Radio wave absorption material

## 2. Radiated emission

