



DATA SHEET		Date	10-May-18
Model	GHA500F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

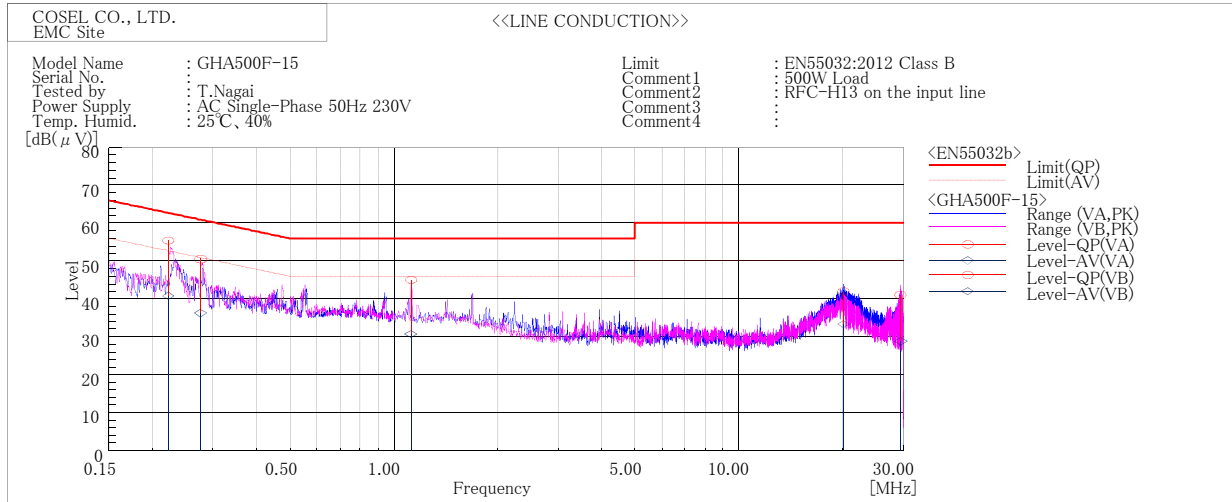


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.22217	VB	55.4	40.8	62.7	52.7	7.3	11.9	Pass	
0.27603	VB	50.5	36.2	60.9	50.9	10.4	14.7	Pass	
1.12231	VB	45.1	30.8	56	46	10.9	15.2	Pass	
20.14165	VA	42	33.3	60	50	18	16.7	Pass	
29.4863	VB	41	28.8	60	50	19	21.2	Pass	

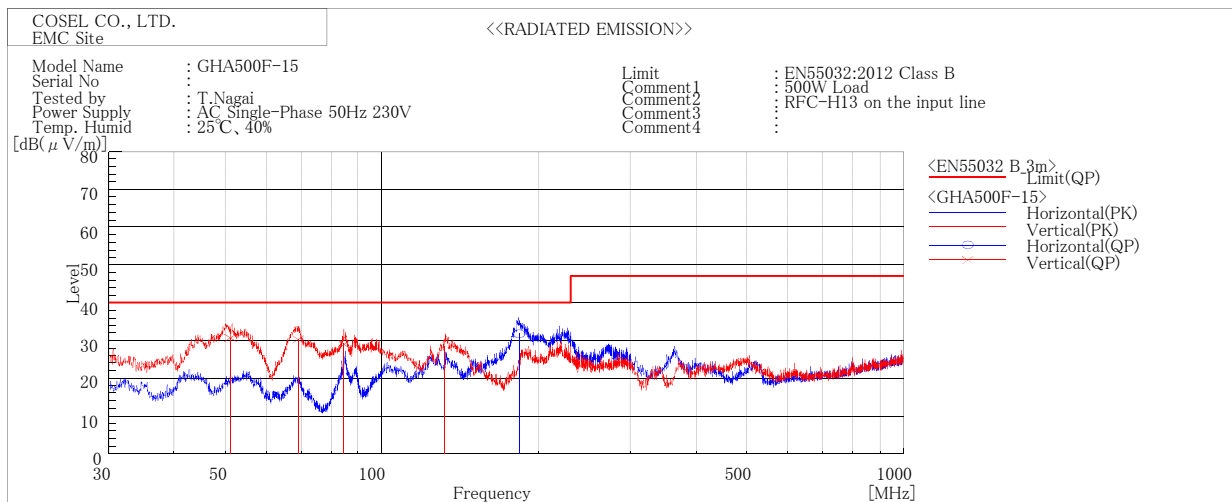

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
51.224	V	Stable	30.7	40.0	9.3	Pass	104	164	
69.106	V	Stable	30.3	40.0	9.7	Pass	103	96	
84.474	V	Stable	29.0	40.0	11.0	Pass	101	134	
131.821	V	Stable	28.5	40.0	11.5	Pass	101	107	
183.234	H	Stable	31.8	40.0	8.2	Pass	156	166	

DATA SHEET		Date	10-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

1. Line conduction

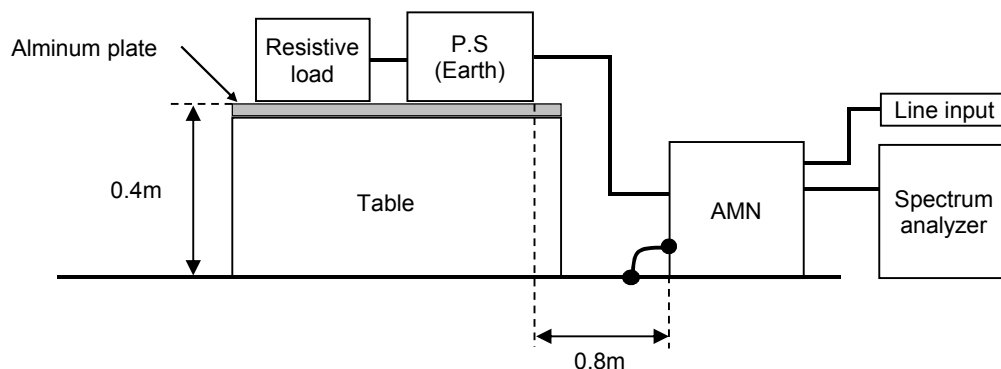

2. Radiated emission

