



DATA SHEET		Date	11-May-18
Model	GHA500F-30	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

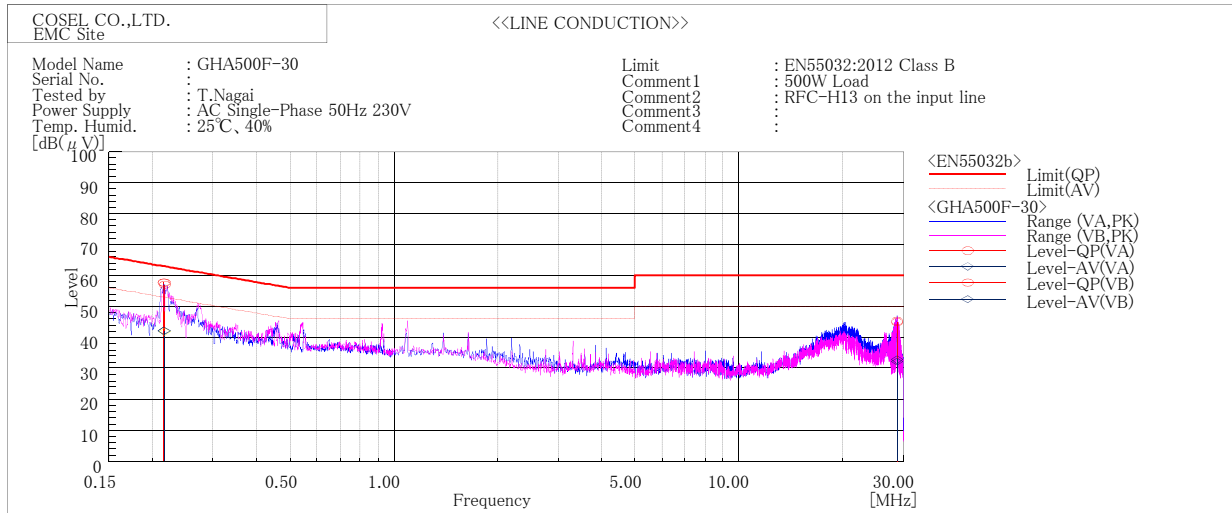


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.21628	VB	57.7	42.1	63	53	5.3	10.9	Pass	
0.21736	VA	57	41.8	62.9	52.9	5.9	11.1	Pass	
0.21598	VB	57.7	42	63	53	5.3	11	Pass	
28.74105	VB	45.3	32.2	60	50	14.7	17.8	Pass	
28.72405	VA	44.9	32.8	60	50	15.1	17.2	Pass	

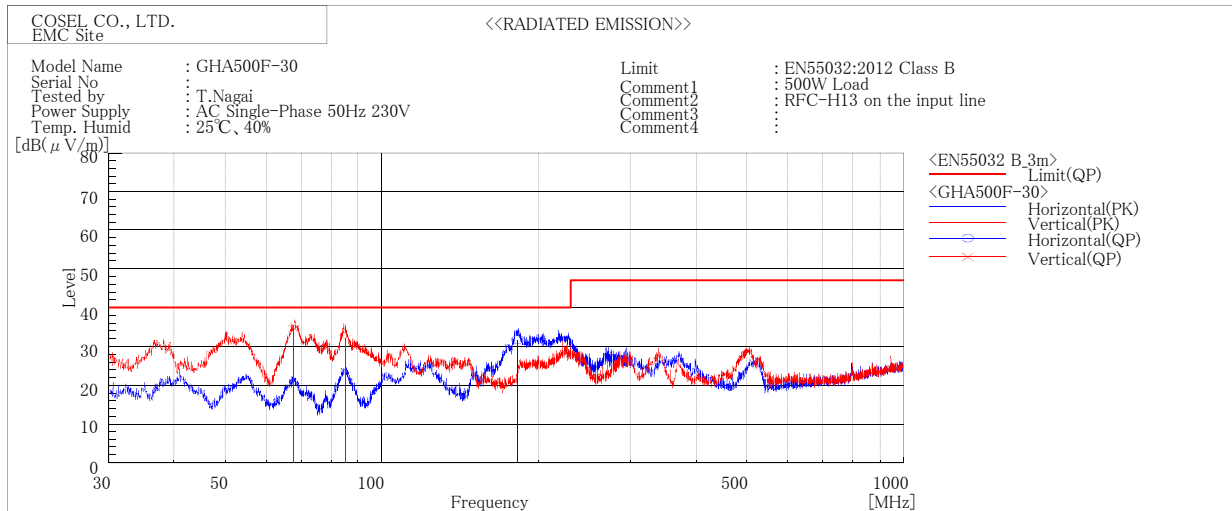

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
67.791	V	Stable	34.6	40.0	5.4	Pass	105	155	
84.873	V	Stable	32.0	40.0	8.0	Pass	103	165	
182.090	H	Stable	31.8	40.0	8.2	Pass	156	16	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

1. Line conduction

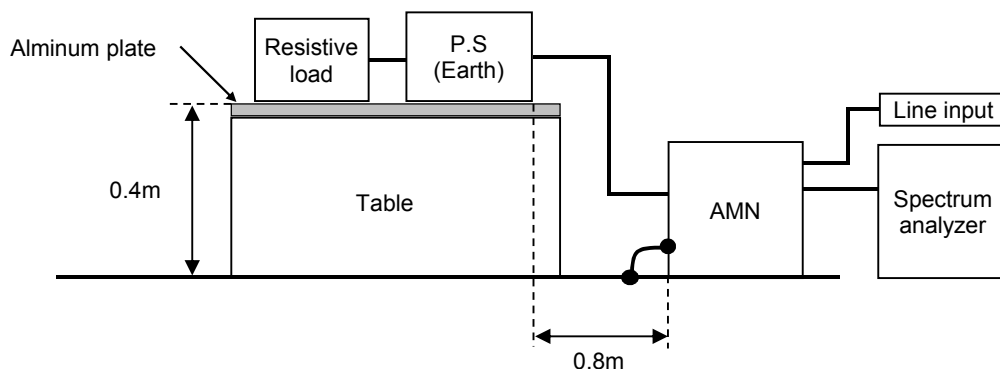

2. Radiated emission

