



DATA SHEET		Date	11-May-18
Model	GHA500F-30-SNF	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

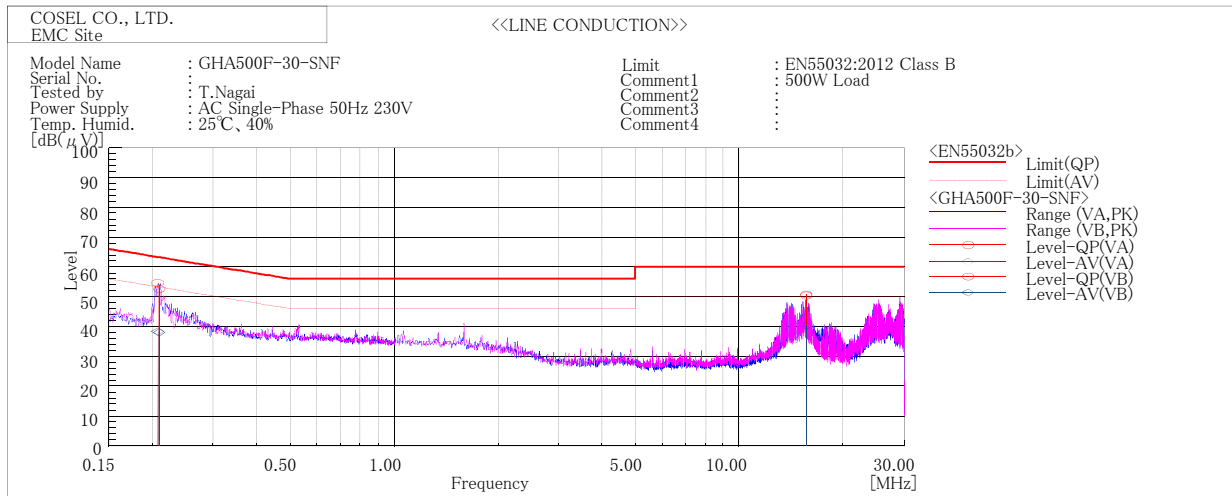

Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.20904	VB	52.6	38.1	63.2	53.2	10.6	15.1	Pass	
0.20703	VA	54.7	38.3	63.3	53.3	8.6	15	Pass	
15.68245	VA	50.4	40.3	60	50	9.6	9.7	Pass	
15.68185	VB	50.7	40.3	60	50	9.3	9.7	Pass	

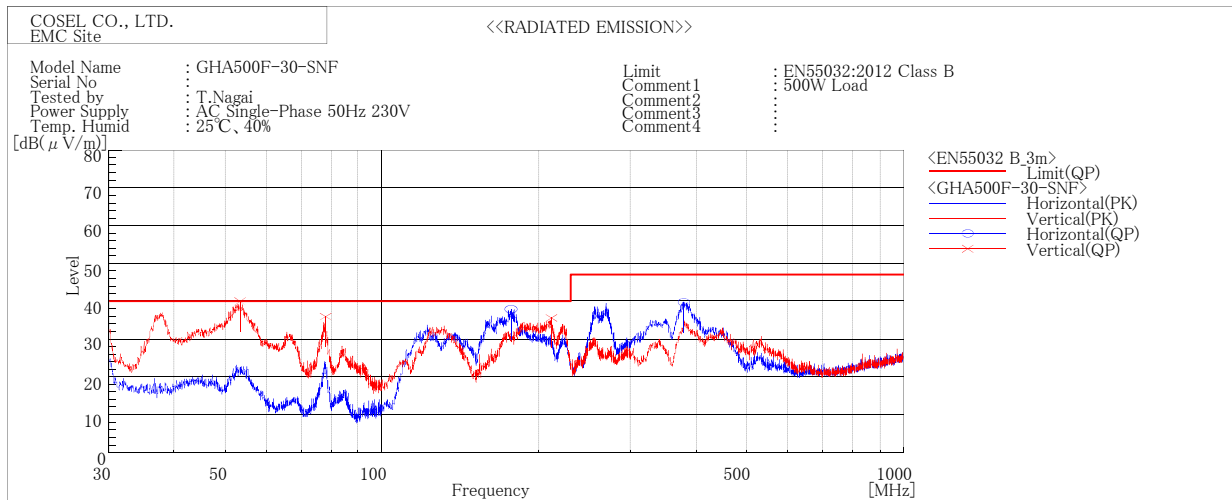


Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
53.500	V	Stable	36.0	40.0	4.0	Pass	107	312	
77.658	V	Stable	28.9	40.0	11.1	Pass	126	133	
177.408	H	Stable	33.3	40.0	6.7	Pass	157	11	
211.112	V	Stable	30.4	40.0	9.6	Pass	103	197	
381.232	H	Stable	37.0	47.0	10.0	Pass	101	306	

DATA SHEET

		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

1. Line conduction

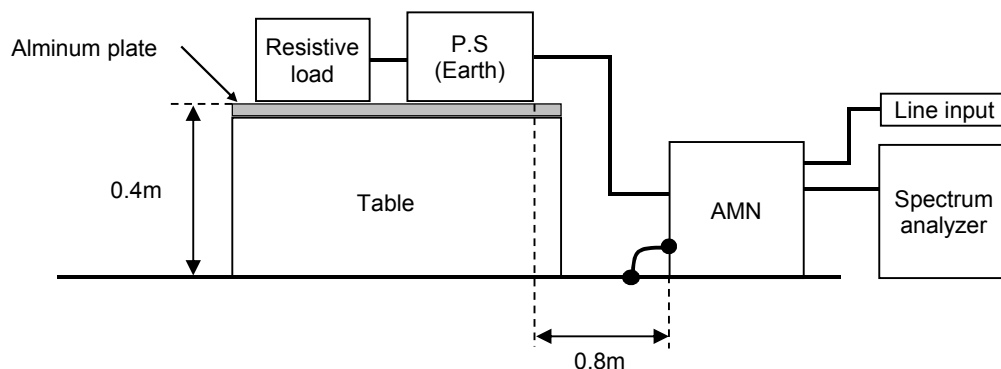

2. Radiated emission

