



DATA SHEET		Date	11-May-18
Model	GHA500F-48-SNF	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

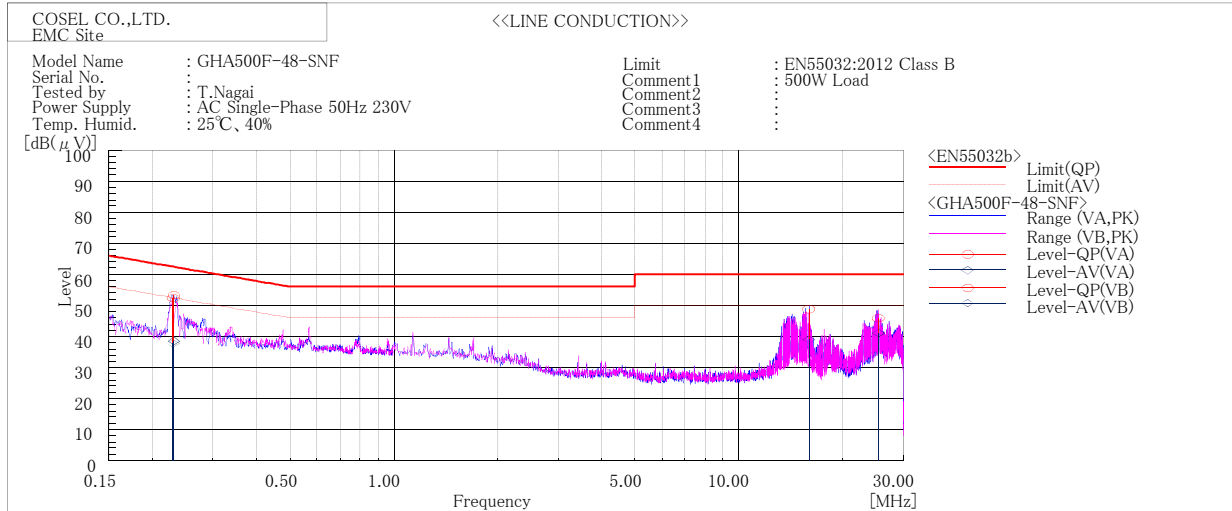


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.23002	VB	52.4	37.8	62.4	52.4	10	14.6	Pass	
0.23102	VA	53.3	38.5	62.4	52.4	9.1	13.9	Pass	
15.96665	VA	48.7	38.9	60	50	11.3	11.1	Pass	
25.3774	VB	45.8	41.1	60	50	14.2	8.9	Pass	

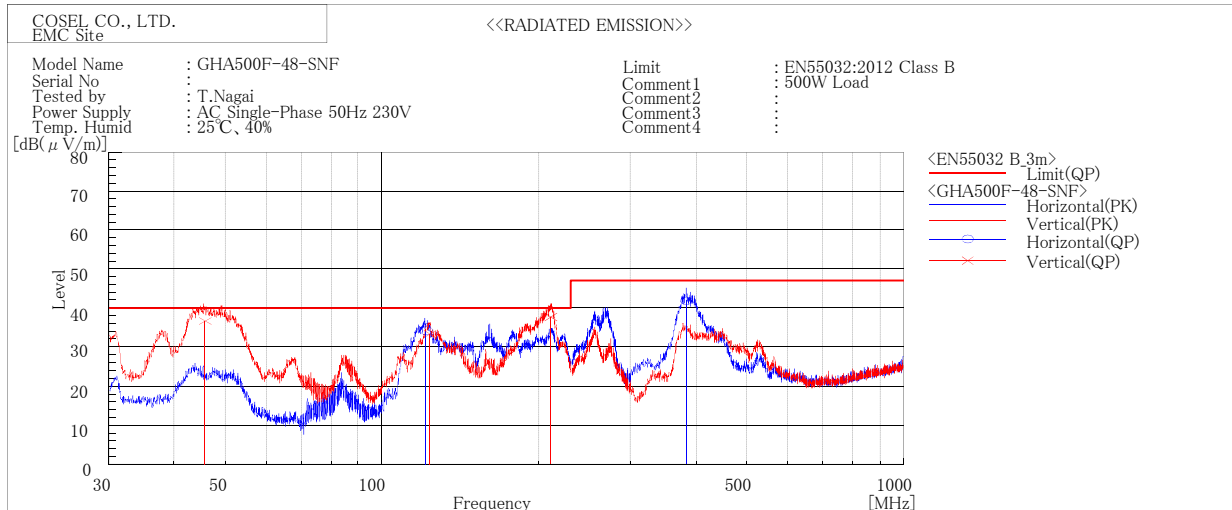

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
45.812	V	Stable	36.7	40.0	3.3	Pass	104	350	
121.752	H	Stable	34.2	40.0	5.8	Pass	146	16	
123.602	V	Stable	33.3	40.0	6.7	Pass	145	89	
210.809	V	Stable	37.7	40.0	2.3	Pass	103	123	
383.850	H	Stable	41.9	47.0	5.1	Pass	101	244	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

1. Line conduction

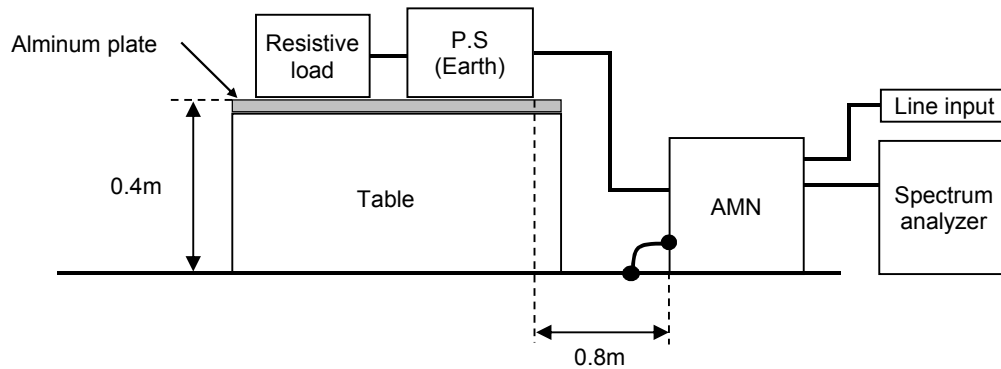

2. Radiated emission

