



DATA SHEET		Date	11-May-18
Model	GHA500F-56	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

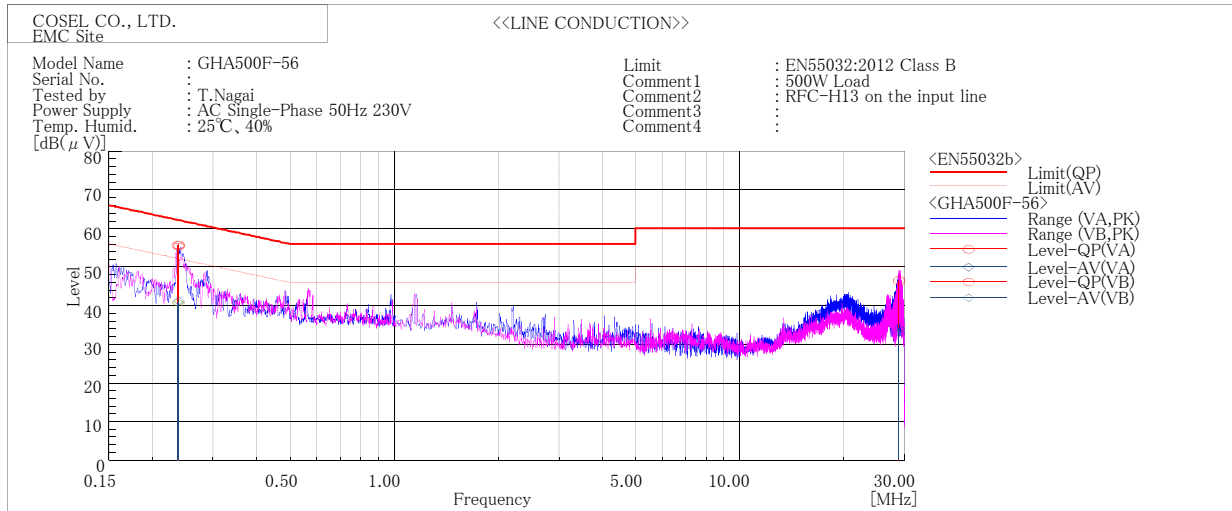


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.23718	VB	55.6	40.9	62.2	52.2	6.6	11.3	Pass	
0.23763	VA	55.3	40.6	62.2	52.2	6.9	11.6	Pass	
0.23783	VB	55.7	41.2	62.2	52.2	6.5	11	Pass	
28.9474	VB	46.2	33	60	50	13.8	17	Pass	
29.01385	VA	46.7	34.2	60	50	13.3	15.8	Pass	

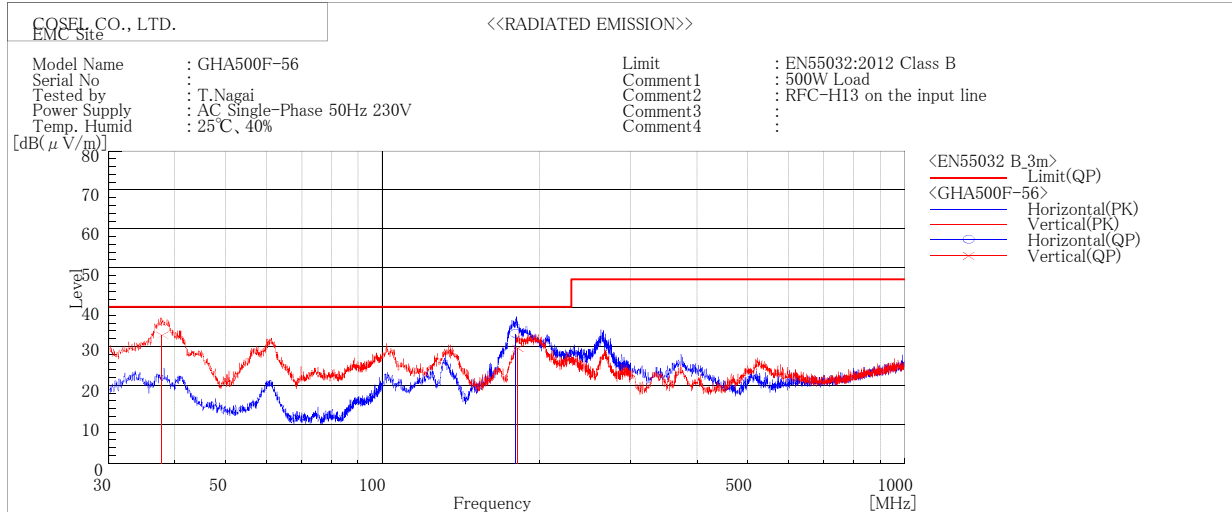

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
37.858	V	Stable	32.8	40.0	7.2	Pass	104	336	
180.200	H	Stable	33.2	40.0	6.8	Pass	140	174	
181.889	V	Stable	29.5	40.0	10.5	Pass	103	254	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

## 1. Line conduction

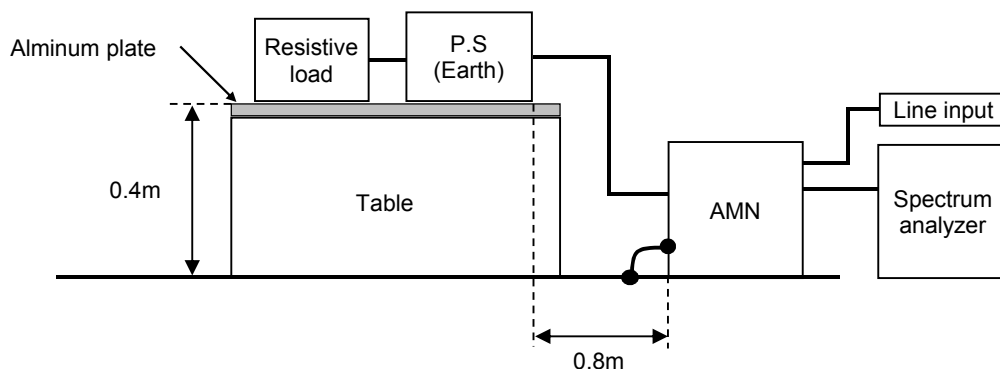

## 2. Radiated emission

