



DATA SHEET		Date	16-Dec-22
Model	GHA700F-24-J1	Temp.	24 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	30 %RH
		Tested by	K.Tatsusima

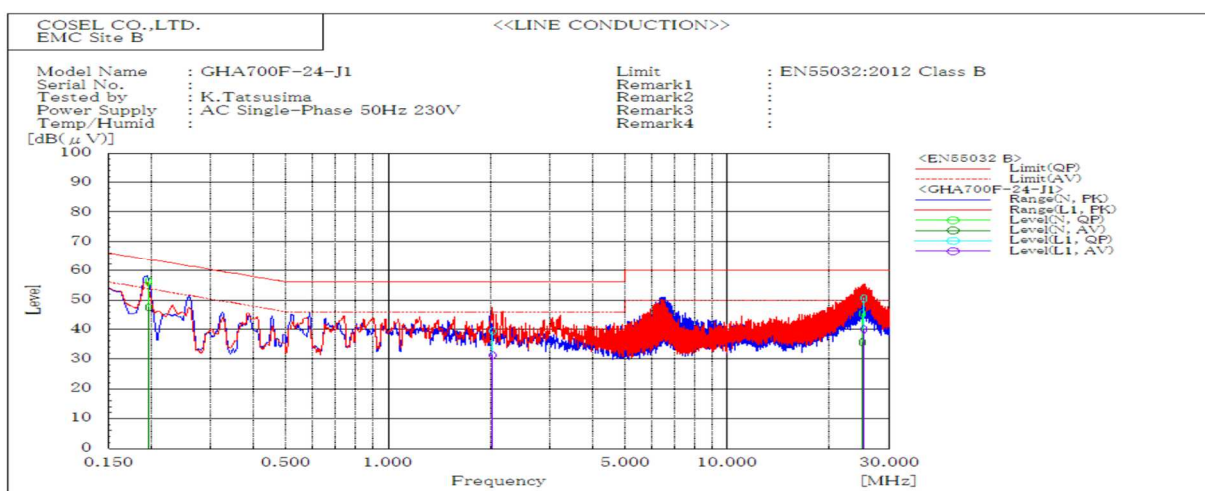


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
2.030	L1	39.5	31.6	56.0	46.0	16.5	14.4	Pass	
25.272	L1	50.5	40.2	60.0	50.0	9.5	9.8	Pass	
0.196	N	56.3	47.5	63.8	53.8	7.5	6.3	Pass	
25.017	N	45.5	35.8	60.0	50.0	14.5	14.2	Pass	

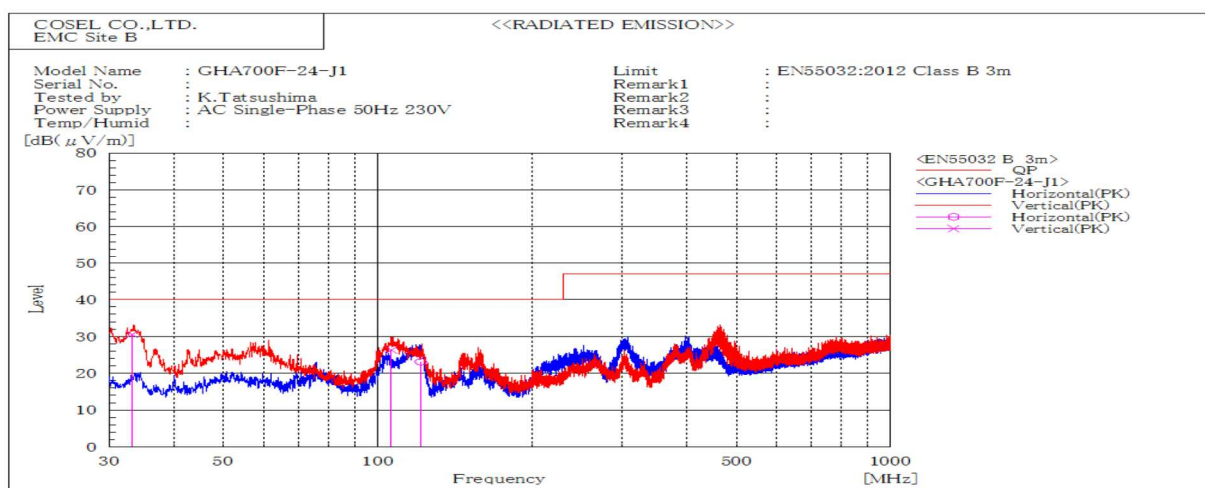


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
121.167	H	Stable	23.1	40.0	16.9	Pass	160.9	290.9	
33.116	V	Stable	30.5	40.0	9.5	Pass	100.0	18.4	
106.229	V	Stable	26.3	40.0	13.7	Pass	101.6	341.3	

DATA SHEET		Date	16-Dec-22
Model	Circuit used for measurement	Temp.	24 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	30 %RH
		Tested by	K.Tatsusima

### 1. Line conduction

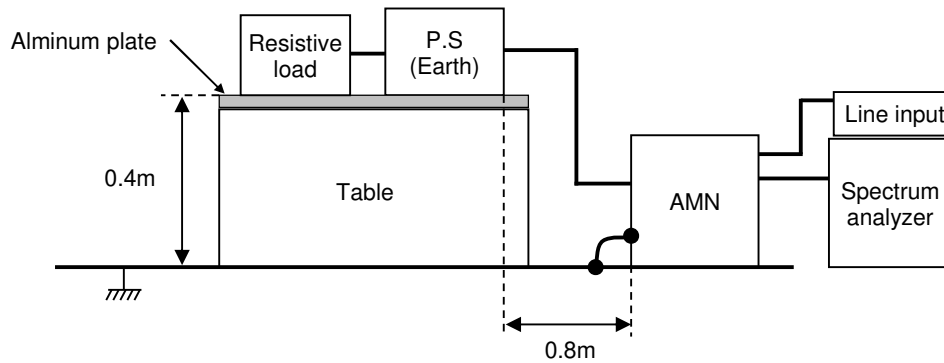

### 2. Radiated emission

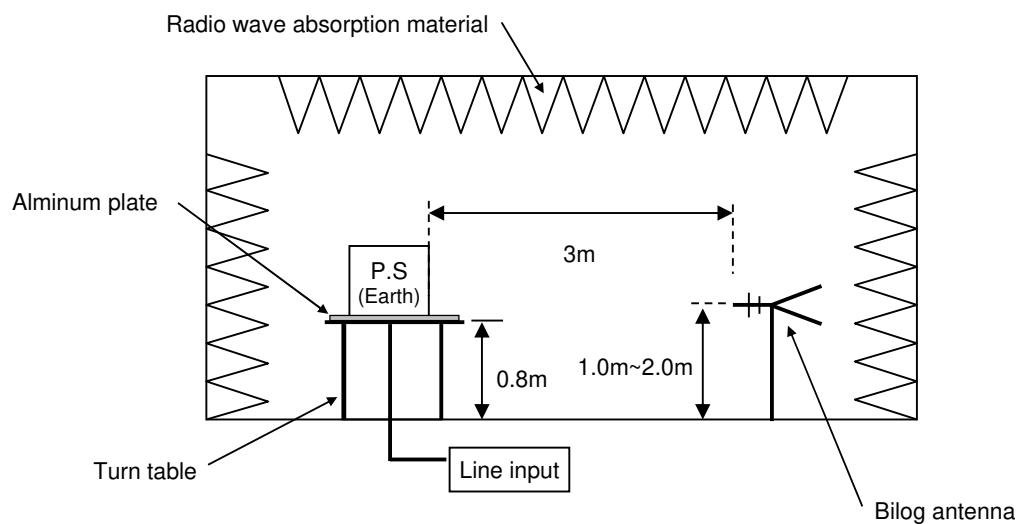

## Conditions

Test : EMI  
Model Name: GHA700F-24-J1

○Photographs of Test Set-Up

### 1.LINE CONDUCTION



### 2.RADIATED EMISSION

