



DATA SHEET		Date	27-Jan-23
Model	GHA700F-56-J1	Temp.	22 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	26 %RH
		Tested by	K.Ikehata

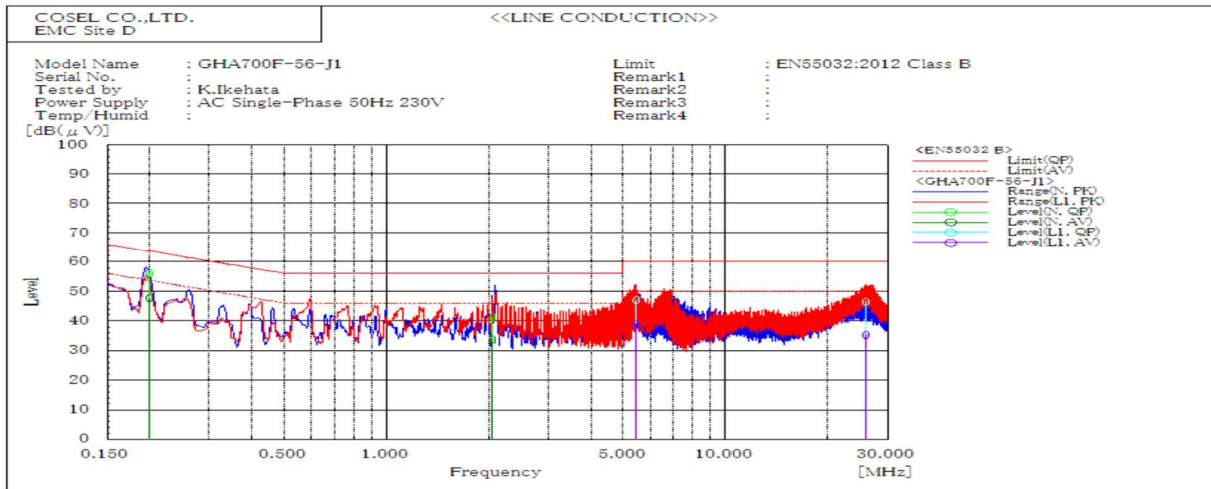


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
5.444	L1	47.0	39.1	60.0	50.0	13.0	10.9	Pass	
25.949	L1	46.5	35.4	60.0	50.0	13.5	14.6	Pass	
0.199	N	56.2	47.7	63.7	53.7	7.5	6.0	Pass	
2.057	N	41.4	33.6	56.0	46.0	14.6	12.4	Pass	

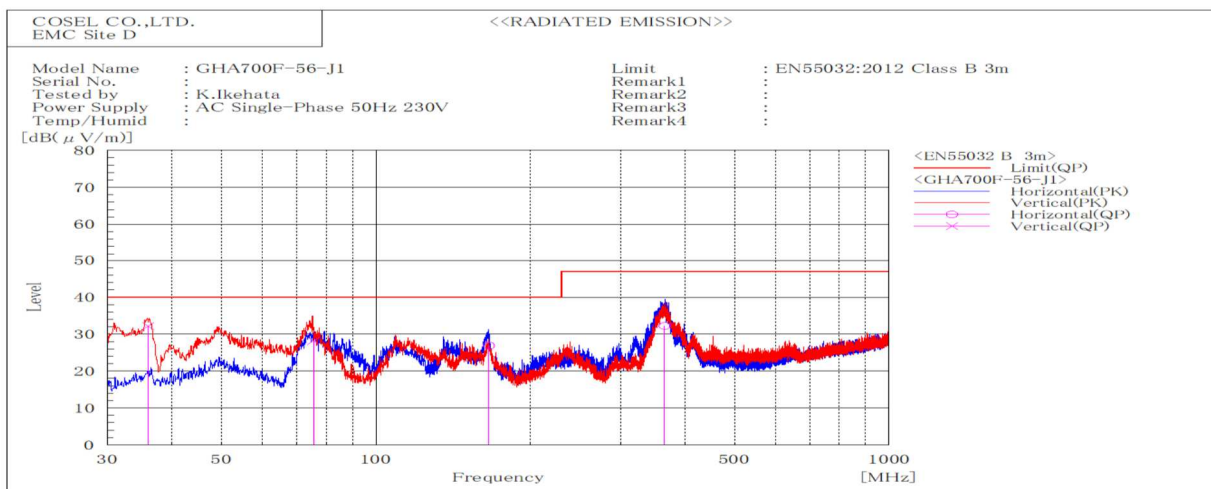


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
165.907	H	Stable	26.9	40.0	13.1	Pass	182.2	26.7	
365.491	H	Stable	32.2	47.0	14.8	Pass	100.2	348.2	
35.964	V	Stable	32.2	40.0	7.8	Pass	100.0	316.5	
75.578	V	Stable	28.2	40.0	11.8	Pass	100.2	5.5	

DATA SHEET		Date	27-Jan-23
Model	Circuit used for measurement	Temp.	22 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	26 %RH
		Tested by	K.Ikehata

1. Line conduction

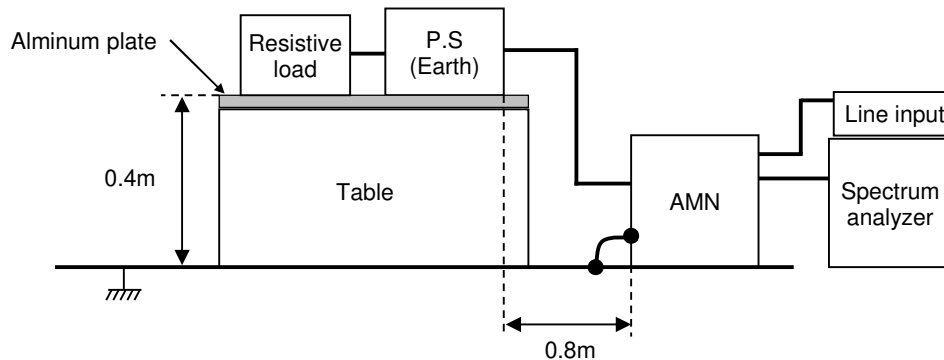

2. Radiated emission

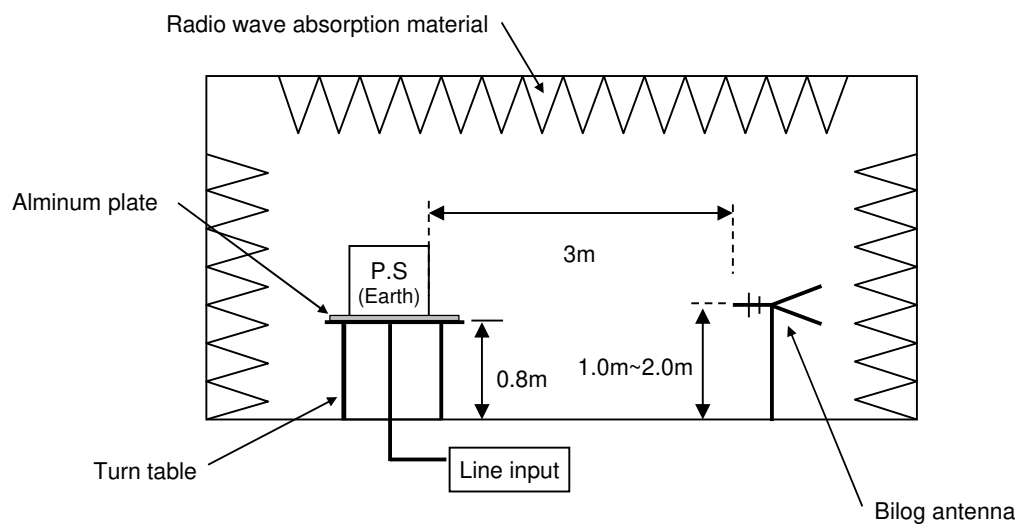

Conditions

Test : EMI
Model Name: GHA700F-56-J1

○Photographs of Test Set-Up

1.LINE CONDUCTION



2.RADIATED EMISSION

