



DATA SHEET		Date	08-May-18
Model	GMA300F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Tachibana

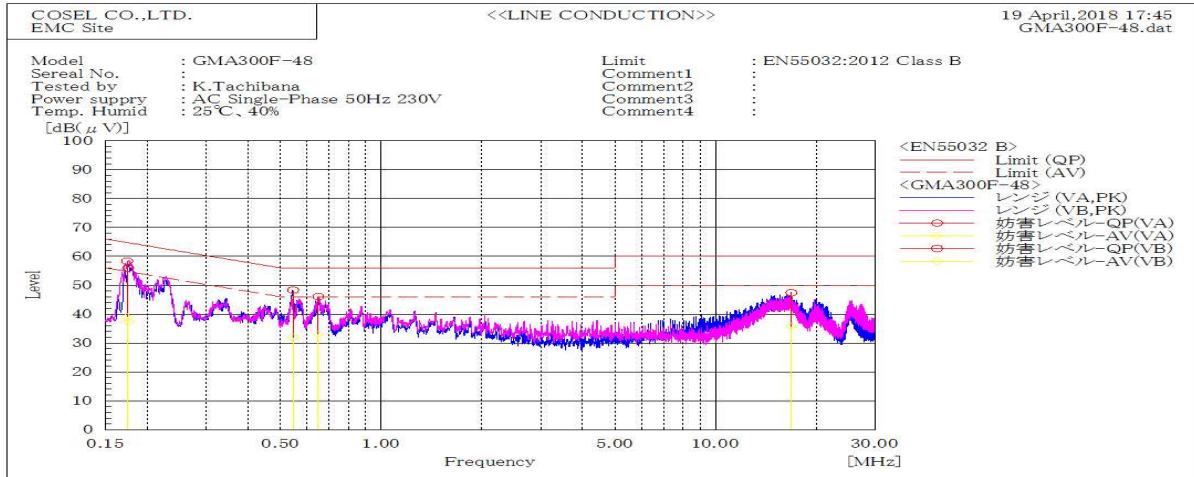


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.1751	VA	55.9	37.4	64.7	54.7	8.8	17.3	Pass	
0.17382	VB	58.4	39	64.8	54.8	6.4	15.8	Pass	
0.54565	VA	48.3	32	56	46	7.7	14	Pass	
0.64917	VA	46.1	33	56	46	9.9	13	Pass	
16.8837	VA	47.4	35.8	60	50	12.6	14.2	Pass	

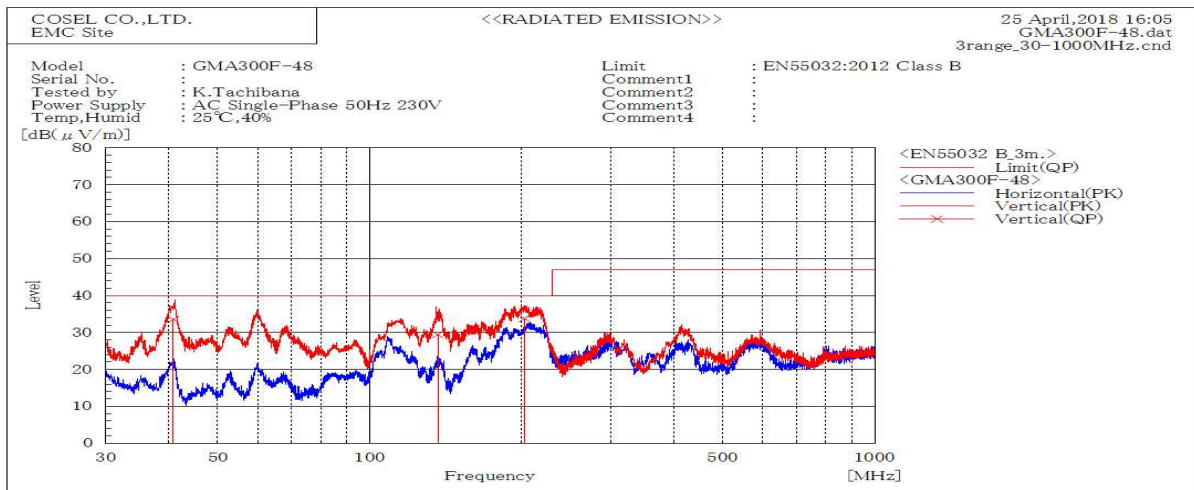


Frequency MHz	Polarization	Stability	Reading dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
40.868	V	Stable	33.5	40.0	6.5	Pass	135	20	
136.357	V	Stable	29.4	40.0	10.6	Pass	110	234	
202.549	V	Stable	33.7	40.0	6.3	Pass	104	256	

DATA SHEET		Date	08-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Tachibana

1. Line conduction

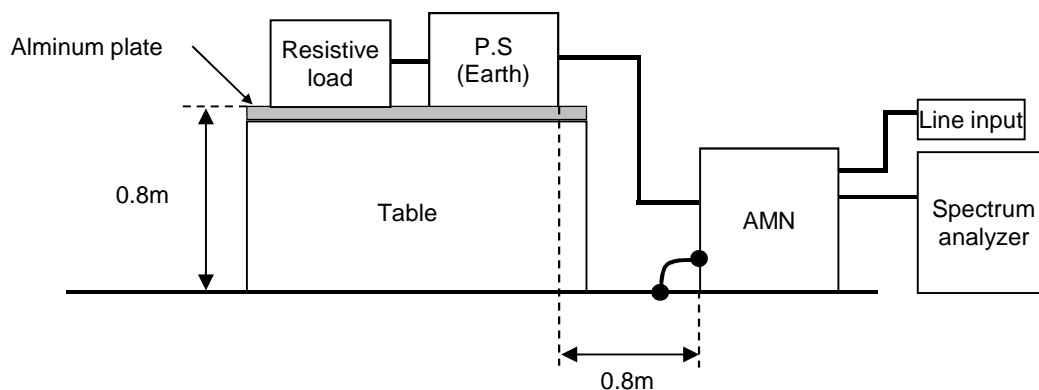

2. Radiated emission

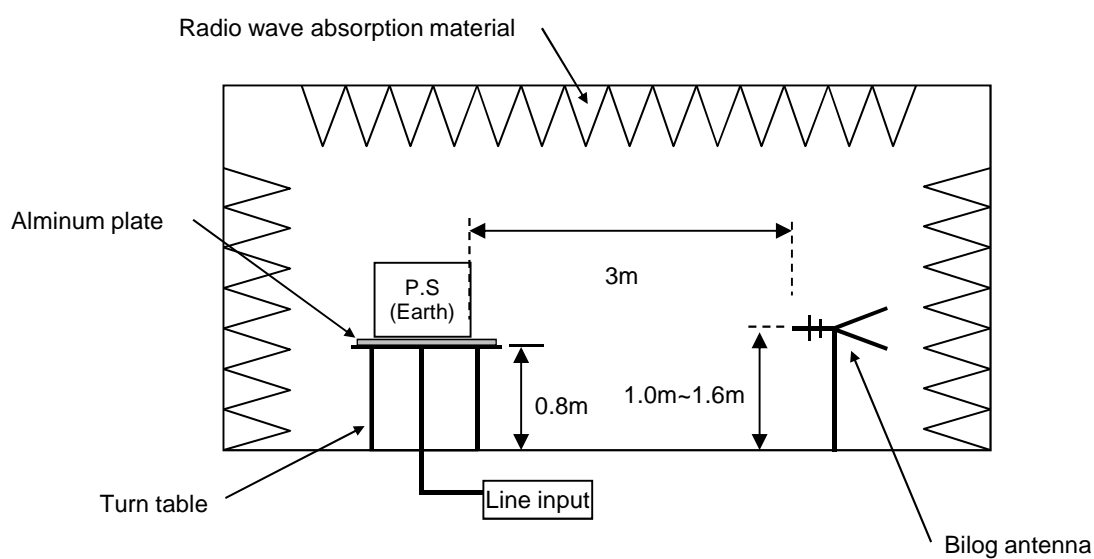

Conditions

Test : EMI
Model Name : GMA300F-48

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

