



DATA SHEET		Date	08-May-18
Model	GMA300F-56	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Tachibana

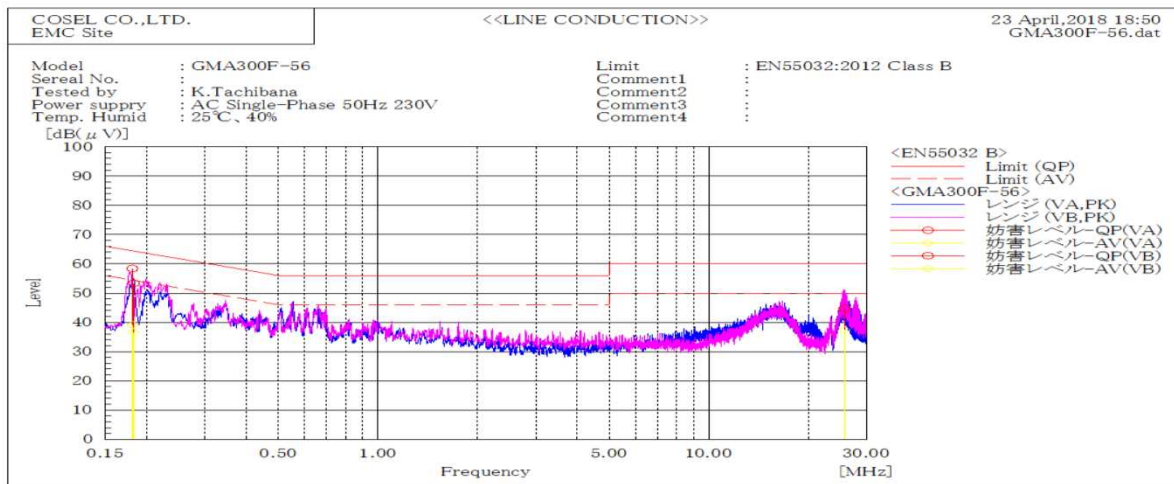


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.18097	VB	58.4	39.1	64.4	54.4	6.0	15.3	Pass	
0.18294	VA	53.3	36.6	64.4	54.4	11.1	17.8	Pass	
25.71795	VB	44.8	37.4	60.0	50.0	15.2	12.6	Pass	

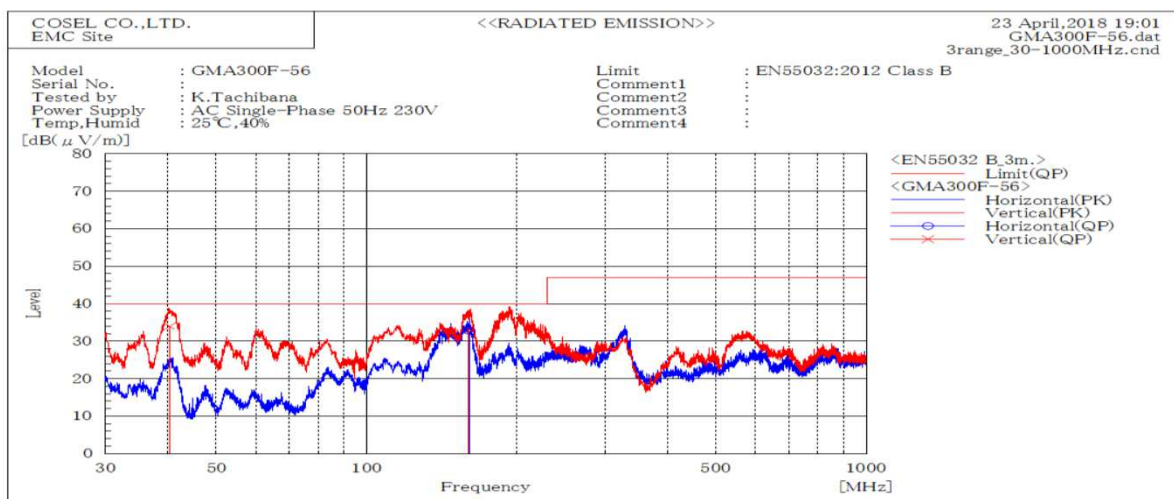


Frequency MHz	Polarization	Stability	Reading dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
40.365	V	Stable	34.0	40.0	6.0	Pass	104	346	
160.826	H	Stable	32.6	40.0	7.4	Pass	155	77	
160.234	V	Stable	33.1	40.0	6.9	Pass	118	134	

DATA SHEET		Date	08-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Tachibana

1. Line conduction

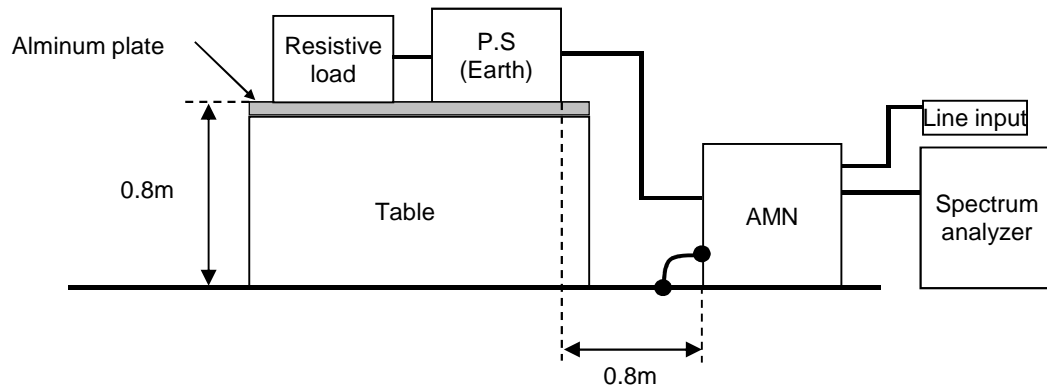

2. Radiated emission

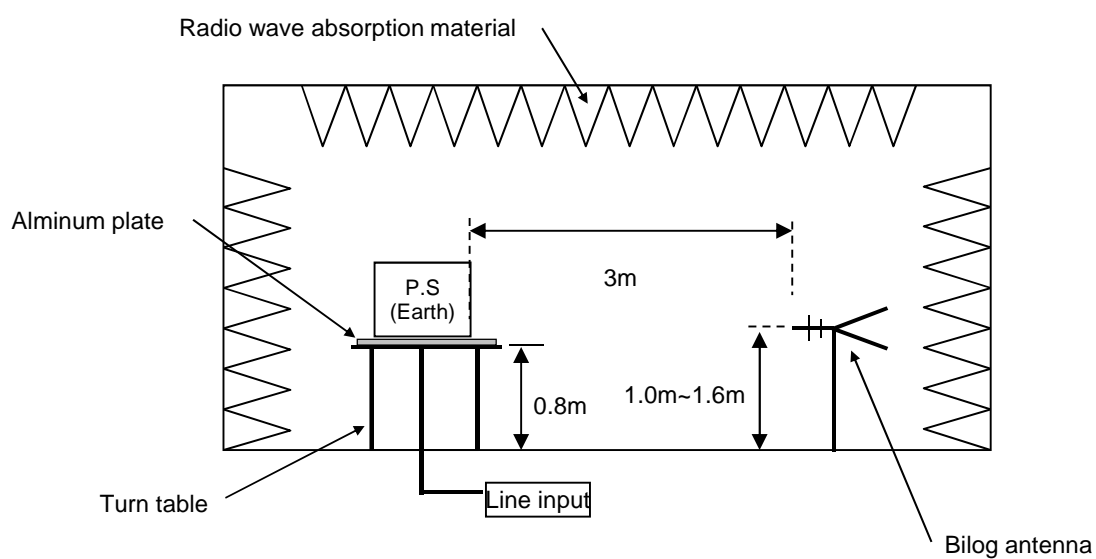


Conditions

Test : EMI
Model Name : GMA300F-56

Photographs of test set-up

1.LINE CONDUCTION

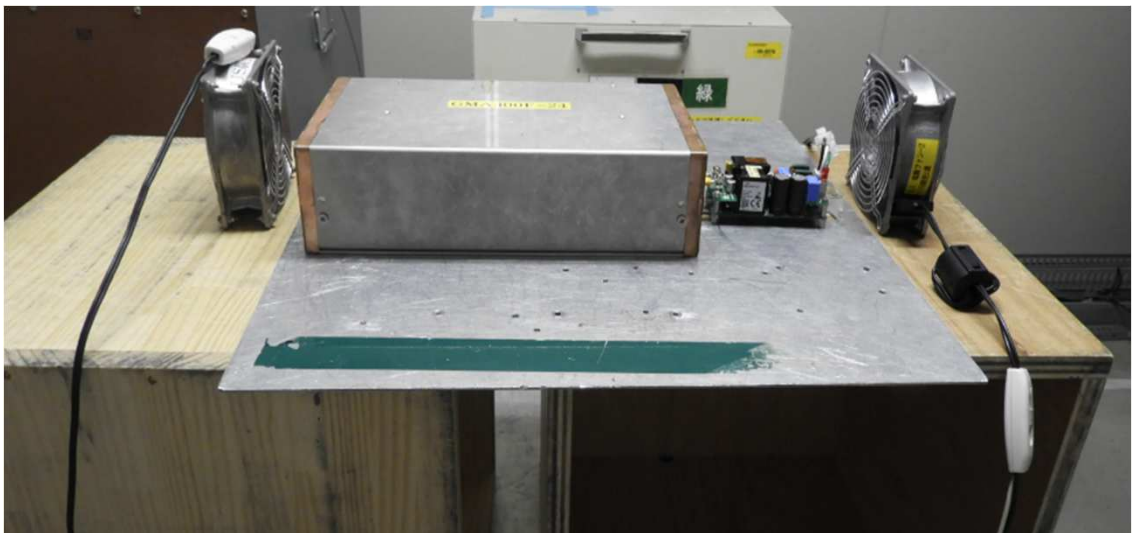

2.RADIATED EMISSION

