



DATA SHEET		Date	25-Feb-26
Model	HFA3500TF-200	Temp.	24 degreeC
Test	EMI	Humid.	45 %RH
	Line conduction & Radiated emission	Tested by	M.Takamune

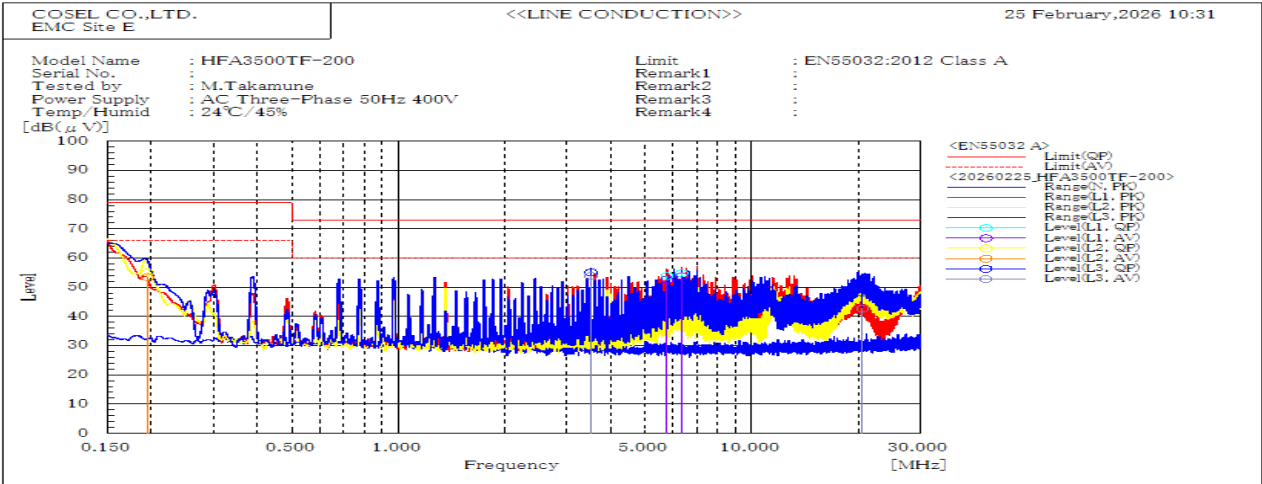


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.195	L2	55.1	53.5	79	66	23.9	12.5	Pass	
3.510	L3	55.1	53.9	73	60	17.9	6.1	Pass	
5.754	L1	53.9	52.7	73	60	19.1	7.3	Pass	
6.338	L1	54.8	53.8	73	60	18.2	6.2	Pass	
20.576	L3	48.2	42.8	73	60	24.8	17.2	Pass	

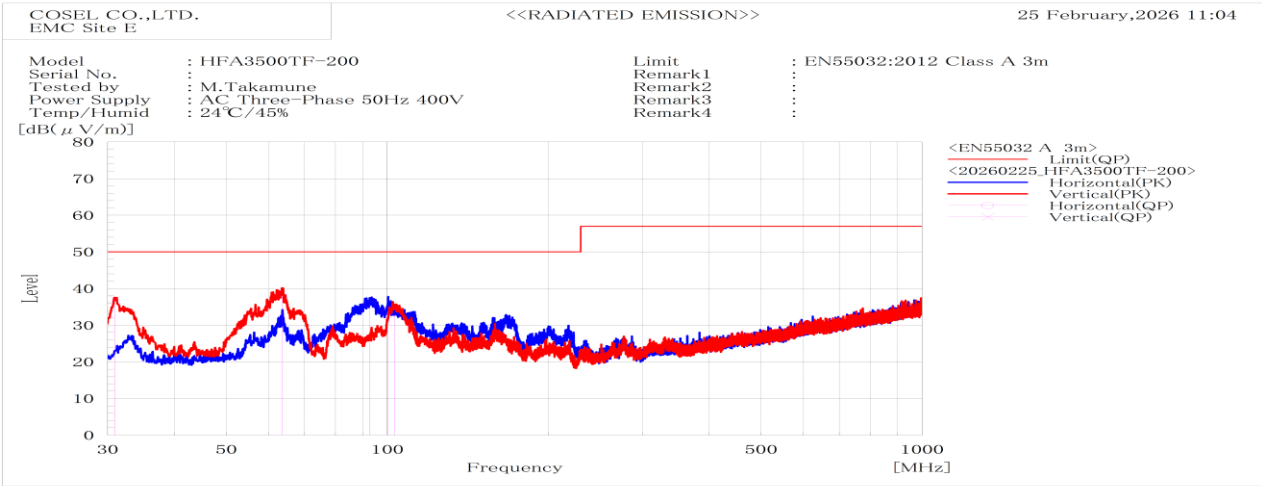


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV/m) QP	dB(uV/m) QP	dB QP				
30.951	V	Stable	37.1	50	12.9	Pass	100.2	210.3	
63.574	V	Stable	38.0	50	12.0	Pass	101.8	259.6	
92.774	H	Stable	35.7	50	14.3	Pass	194.4	280.6	
100.244	H	Stable	33.9	50	16.1	Pass	186.1	165.5	
103.282	V	Stable	32.8	50	17.2	Pass	124.5	78.6	

DATA SHEET		Date	25-Feb-26
Model	Circuit used for measurement	Temp.	24 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	M.Takamune

1. Line conduction

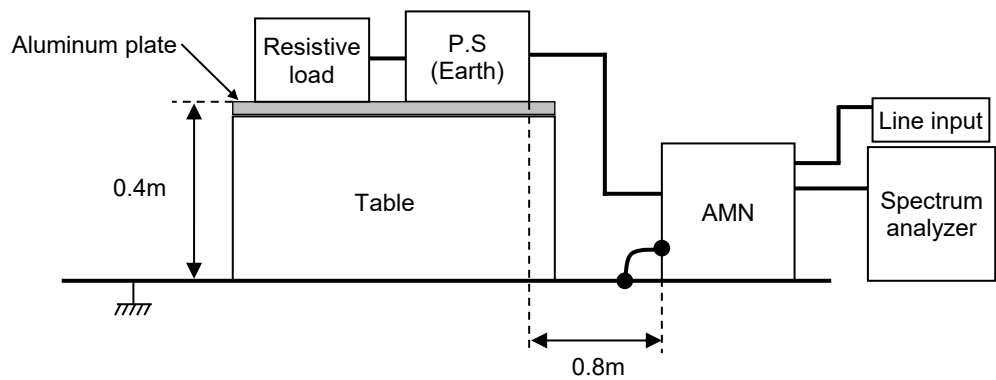

2. Radiated emission


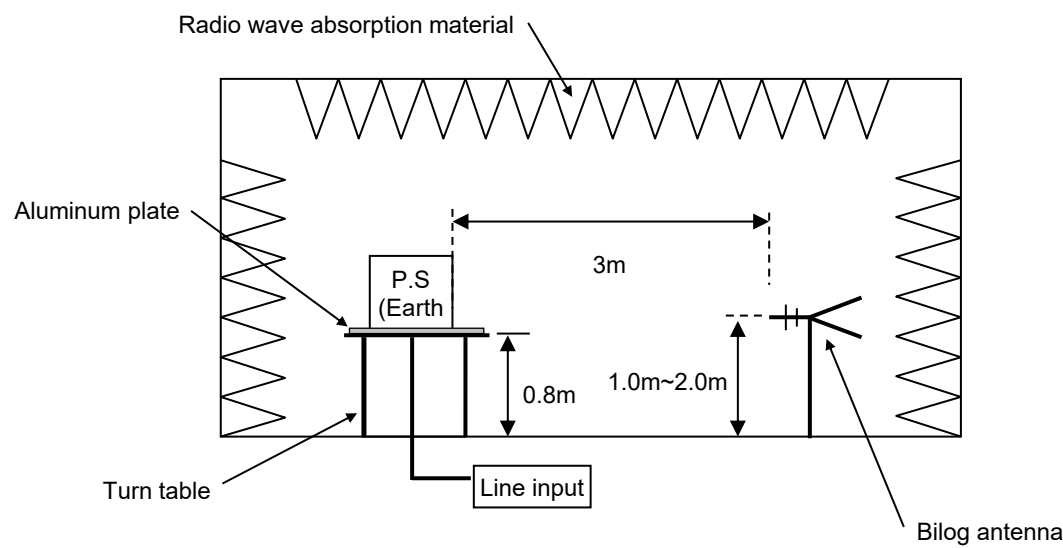


Conditions

Test : EMI
Model Nam: HFA3500TF-200

Photographs of Test Set-Up

1.LINE CONDUCTION

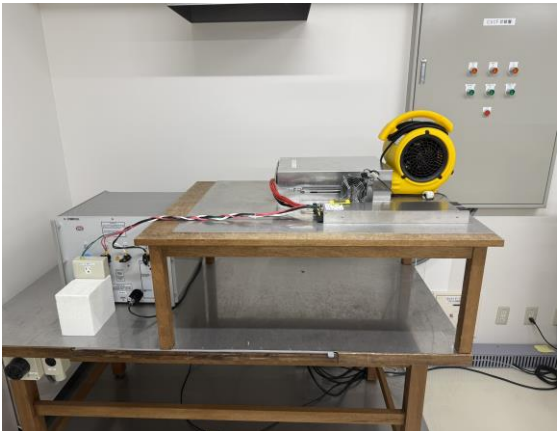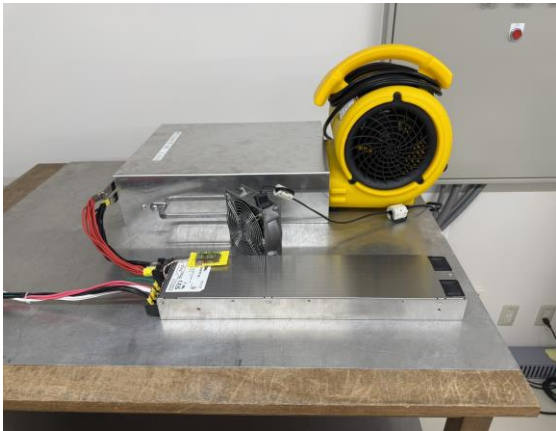

2.RADIATED EMISSION

