



DATA SHEET		Date	26-Feb-26
Model	HFA3500TF-300	Temp.	24 degreeC
Test	EMI	Humid.	45 %RH
	Line conduction & Radiated emission	Tested by	M.Takamune

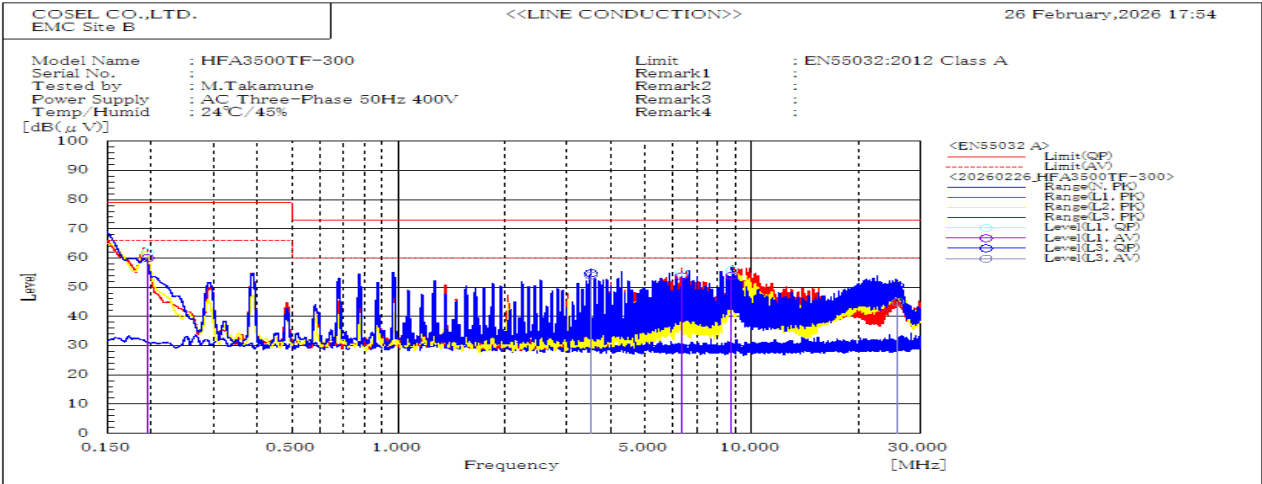


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.195	L1	62.0	60.0	79	66	17.0	6.0	Pass	
3.509	L3	54.8	54.0	73	60	18.2	6.0	Pass	
6.336	L1	54.9	53.8	73	60	18.1	6.2	Pass	
8.770	L1	55.9	53.9	73	60	17.1	6.1	Pass	
25.862	L3	50.6	45.0	73	60	22.4	15.0	Pass	

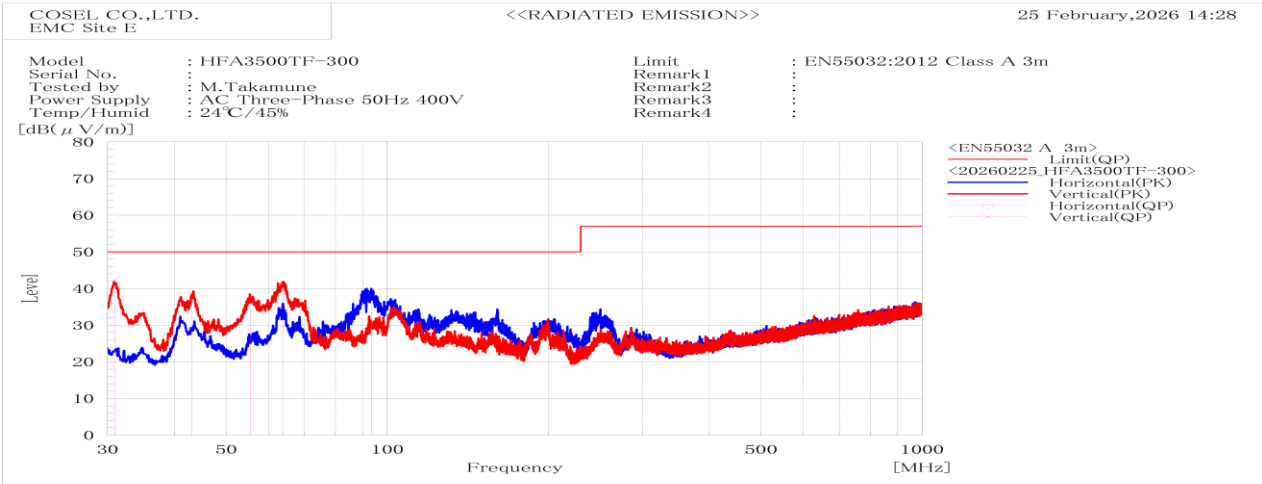


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
30.978	V	Stable	42.4	50	7.6	Pass	132.9	202.8	
43.107	V	Stable	36.3	50	13.7	Pass	100.4	238.0	
55.466	V	Stable	36.7	50	13.3	Pass	101.6	347.6	
63.742	V	Stable	39.8	50	10.2	Pass	100.2	249.1	
93.521	H	Stable	35.2	50	14.8	Pass	196.3	287.8	

DATA SHEET		Date	26-Feb-26
Model	Circuit used for measurement	Temp.	24 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	M.Takamune

1. Line conduction

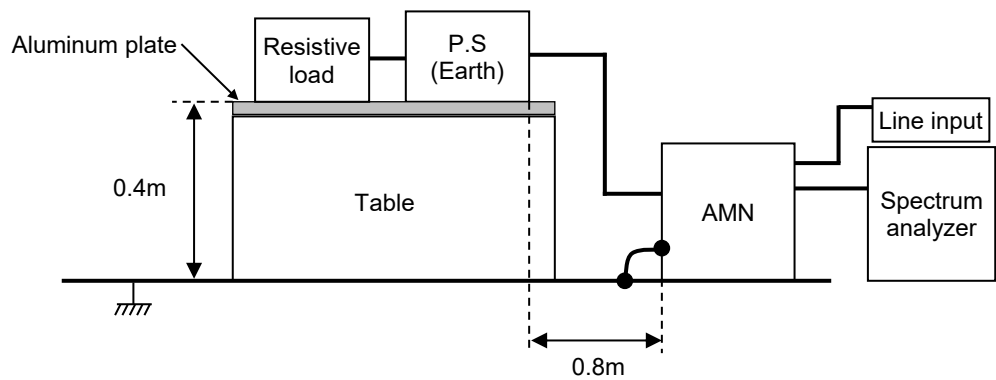

2. Radiated emission


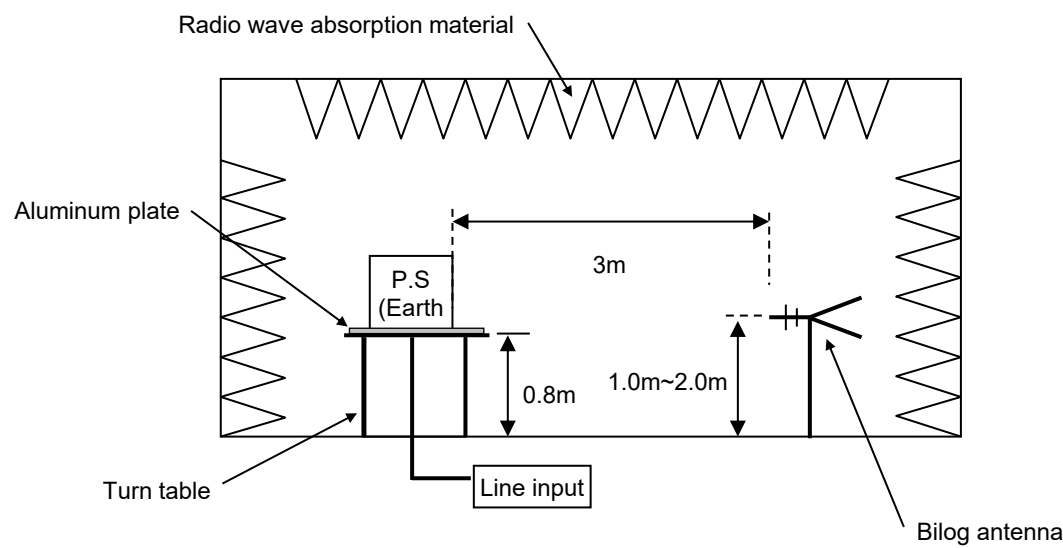


Conditions

Test : EMI
Model Nam: HFA3500TF-300

Photographs of Test Set-Up

1.LINE CONDUCTION

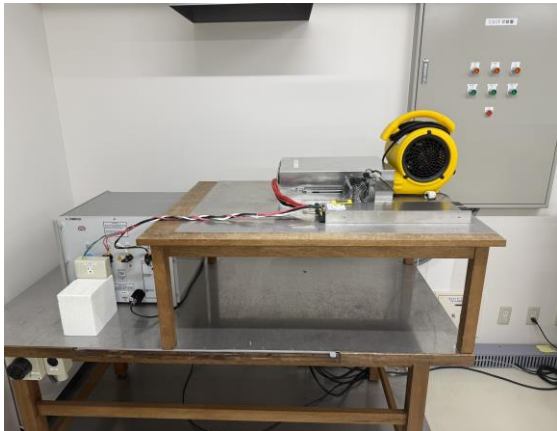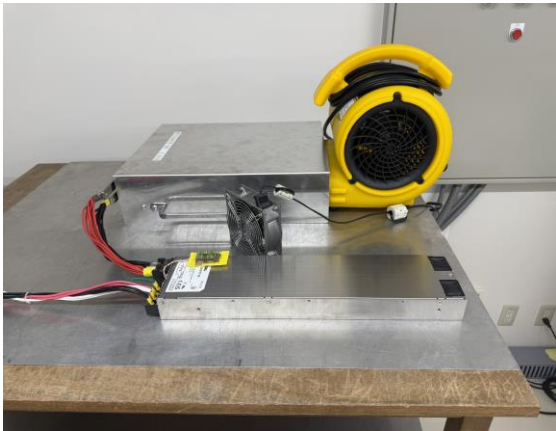

2.RADIATED EMISSION

