



DATA SHEET		Date	18-Apr-24
Model	HFA3500TF-65	Temp.	24 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	35 %RH
		Tested by	Y.Murai

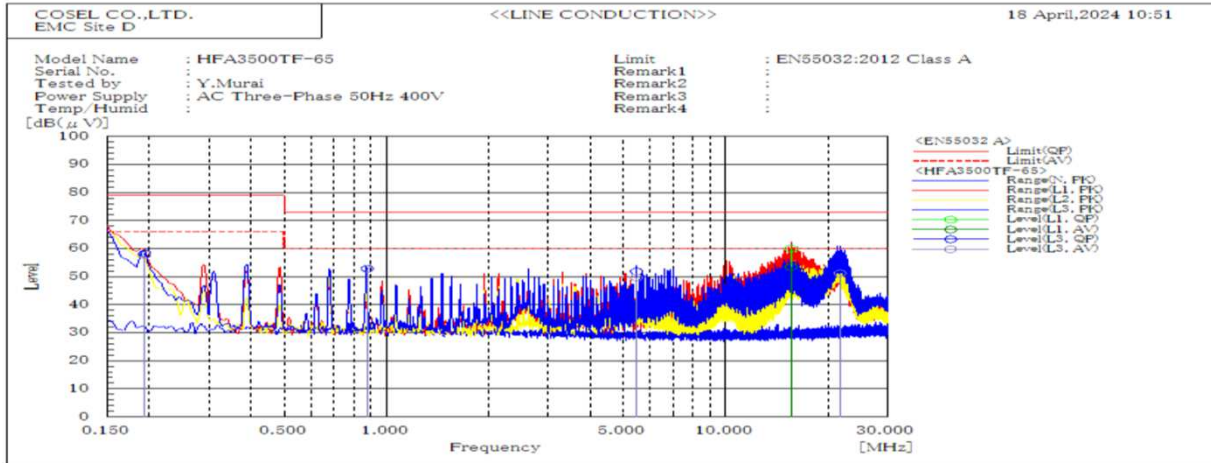


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.194	L3	58.3	57.7	79	66	20.7	8.3	Pass	
0.876	L3	52.9	52.7	73	60	20.1	7.3	Pass	
5.454	L3	51.9	49.6	73	60	21.1	10.4	Pass	
15.582	L1	60	53.5	73	60	13	6.5	Pass	
21.685	L3	57.6	51.2	73	60	15.4	8.8	Pass	

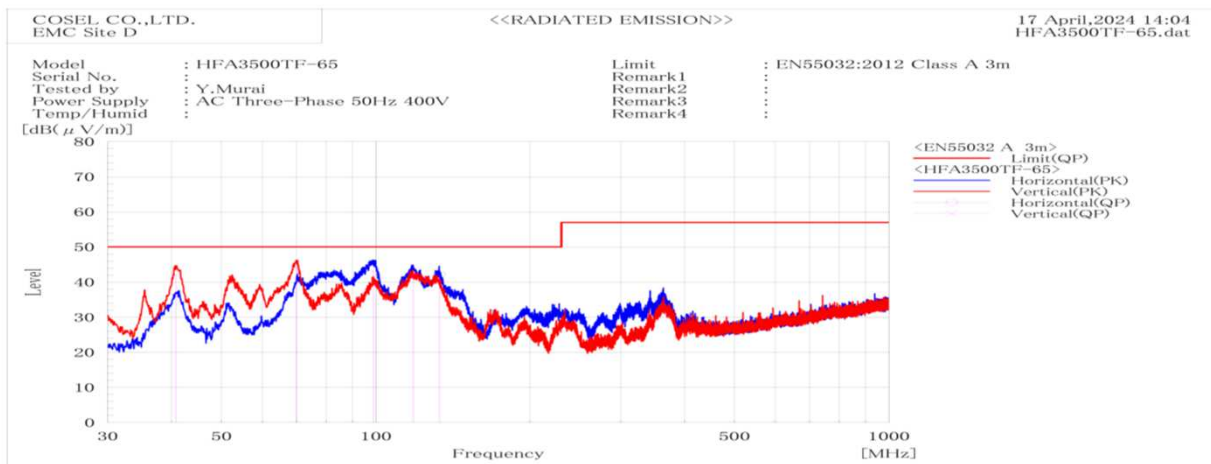


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
40.711	V	Stable	42.1	50	7.9	Pass	100.3	67.2		
70.103	V	Stable	44	50	6	Pass	101.2	13.1		
98.89	H	Stable	43.9	50	6.1	Pass	188.1	308.6		
118.231	H	Stable	42.2	50	7.8	Pass	164	18		
133.032	H	Stable	42.3	50	7.7	Pass	200	182.4		

DATA SHEET		Date	18-Apr-24
Model	Circuit used for measurement	Temp.	24 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	35 %RH
		Tested by	Y.Murai

### 1. Line conduction

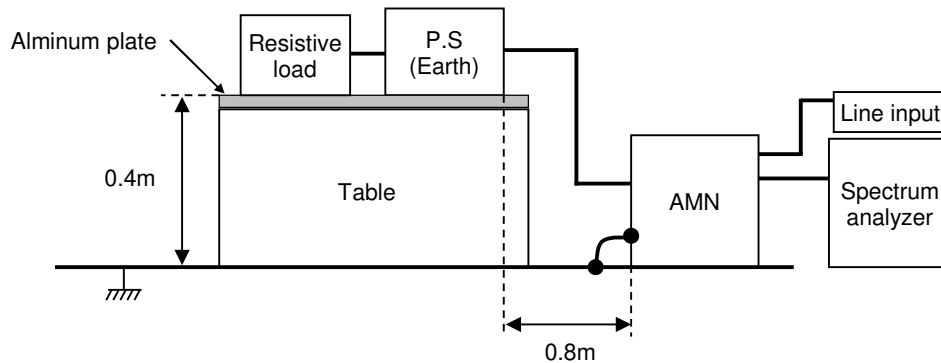

### 2. Radiated emission

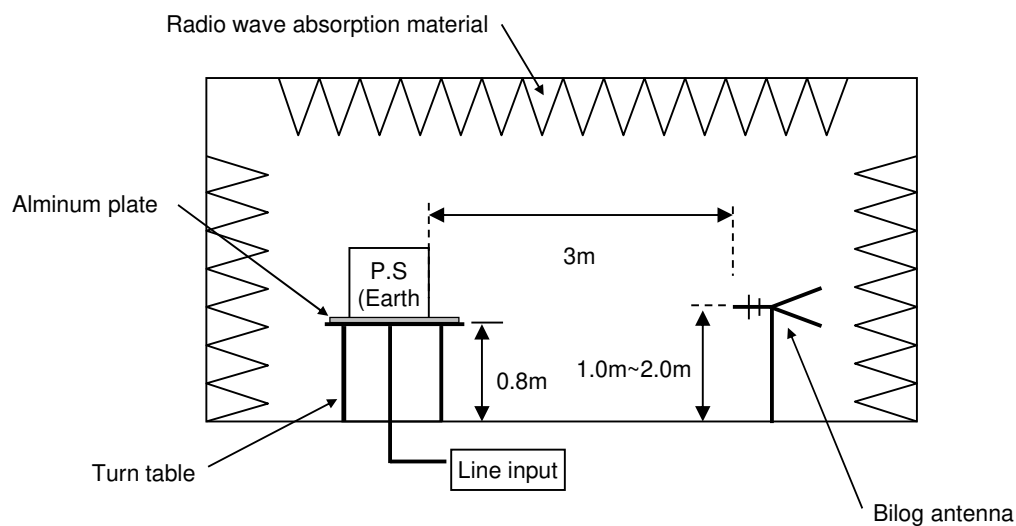


## Conditions

Test : EMI  
Model Nam : HFA3500TF-65

## Pthotographs of Test Set-Up

### 1.LINE CONDUCTION

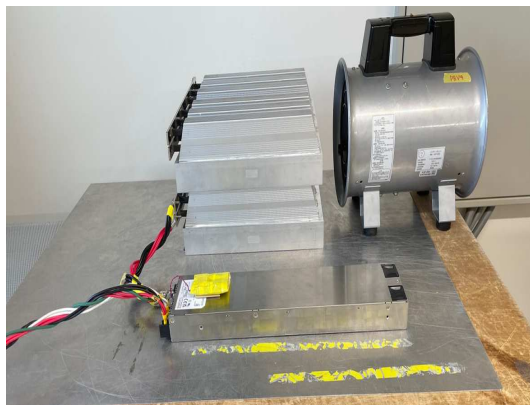

### 2.RADIATED EMISSION

