

TEST DATA OF JAC-30-103-H JAC-30-223-H JAC-30-683-H

Noise Filter

April. 22. 2014

Approved by : Kazunari Asano
Kazunari Asano Design Manager

Prepared by : Takeshi Kato
Takeshi Kato Design Engineer

COSEL CO.,LTD.



CONTENTS

1. Attenuation Characteristics	1
2. Leakage Current	3
3. Figure of Testing Circuitry	4

(Final Page 4)


COSEL

Model	JAC-30-103-H, JAC-30-223-H, JAC-30-683-H	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object			

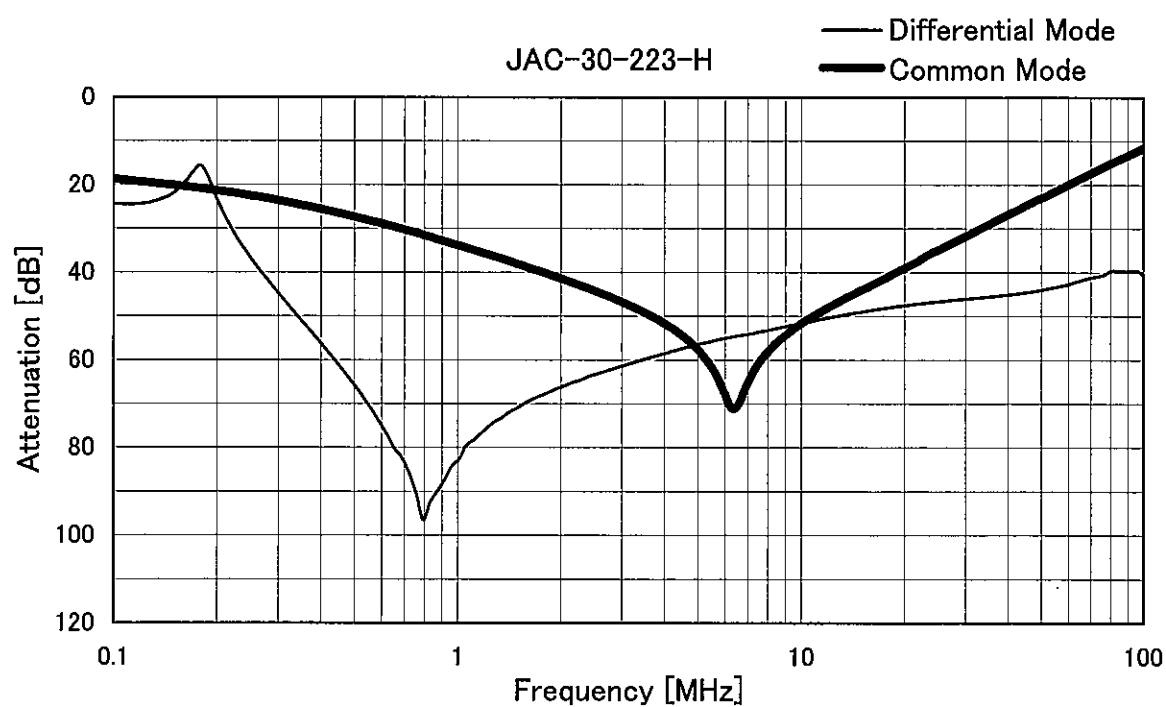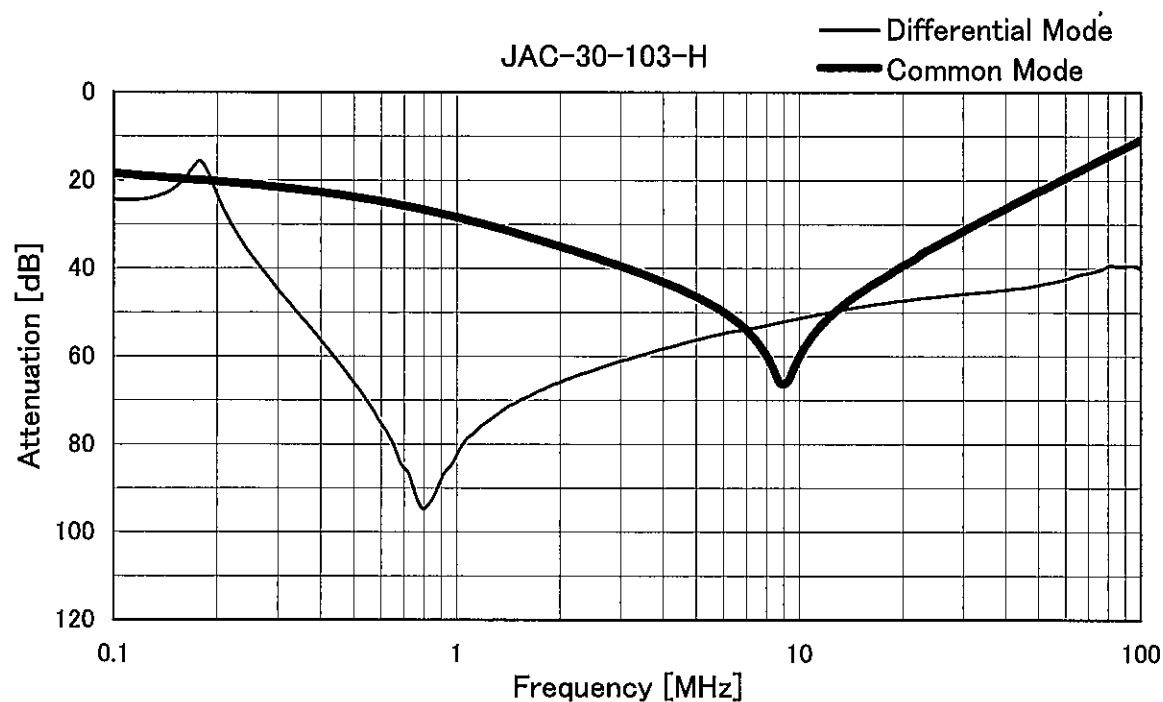

COSEL

Model	JAC-30-103-H,JAC-30-223-H,JAC-30-683-H	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object			

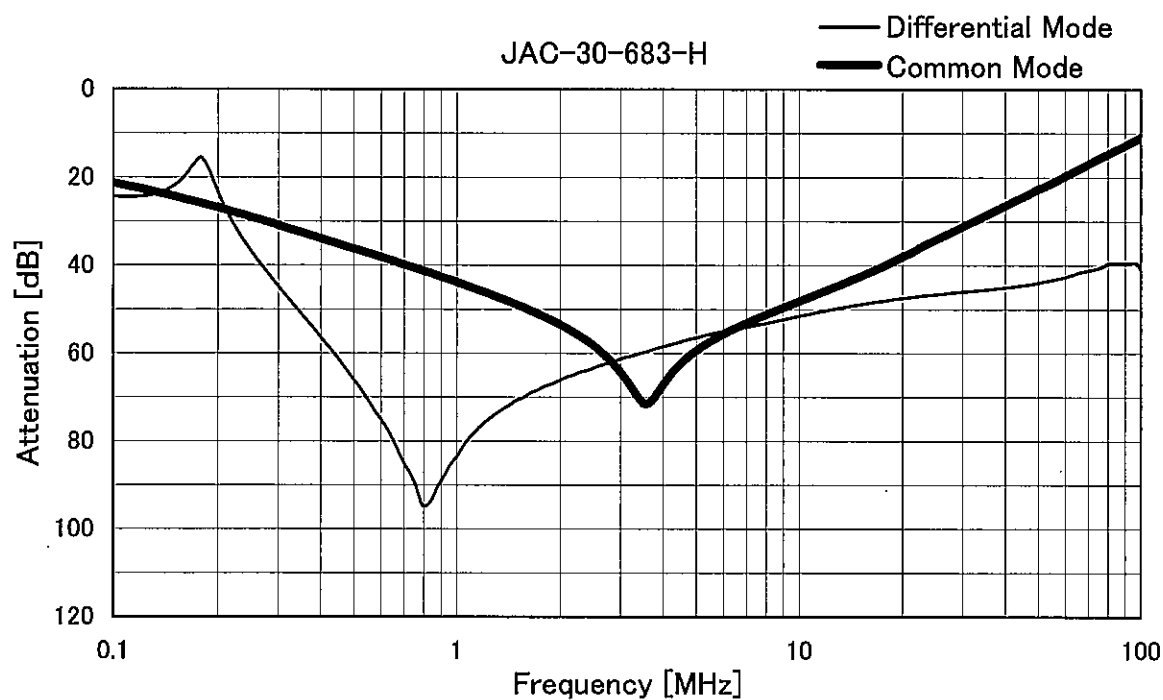

COSEL

Model		JAC-30-103-H,JAC-30-223-H,JAC-30-683-H	Temperature 25°C Testing Circuitry Figure B
Item		Leakage Current	
Object			

1.Results

[mA]

Model	Standards	Input Volt.					Note
		200 [V]	250 [V]	400 [V]	480 [V]	500 [V]	
JAC-30-103-H	UL1283	0.23	0.28	0.45	0.55	0.57	
JAC-30-223-H	UL1283	0.46	0.58	0.92	1.1	1.2	
JAC-30-683-H	UL1283	1.4	1.8	2.8	3.4	3.5	

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

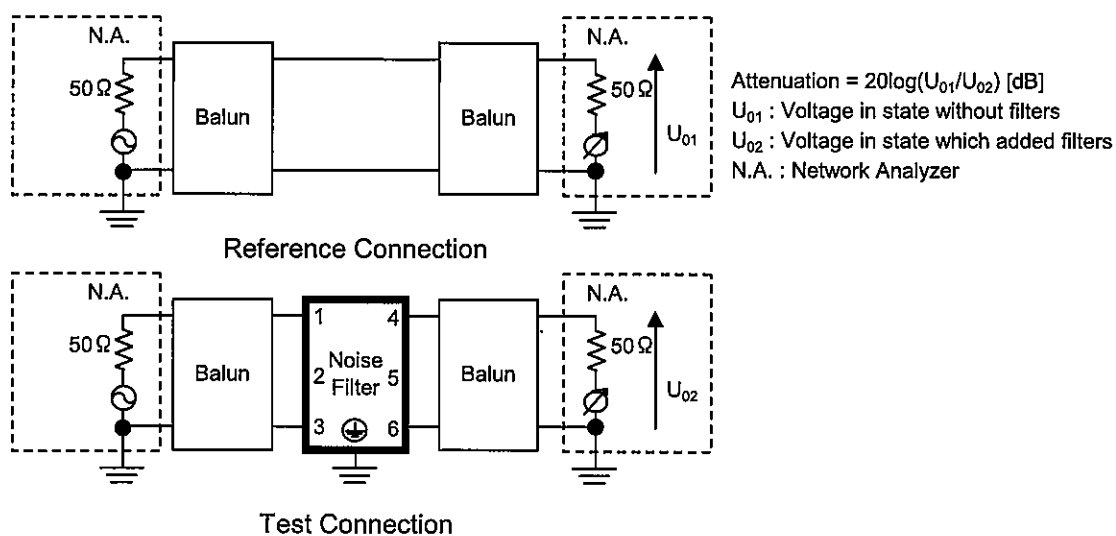


Figure A - 1 Differential mode attenuation measurement

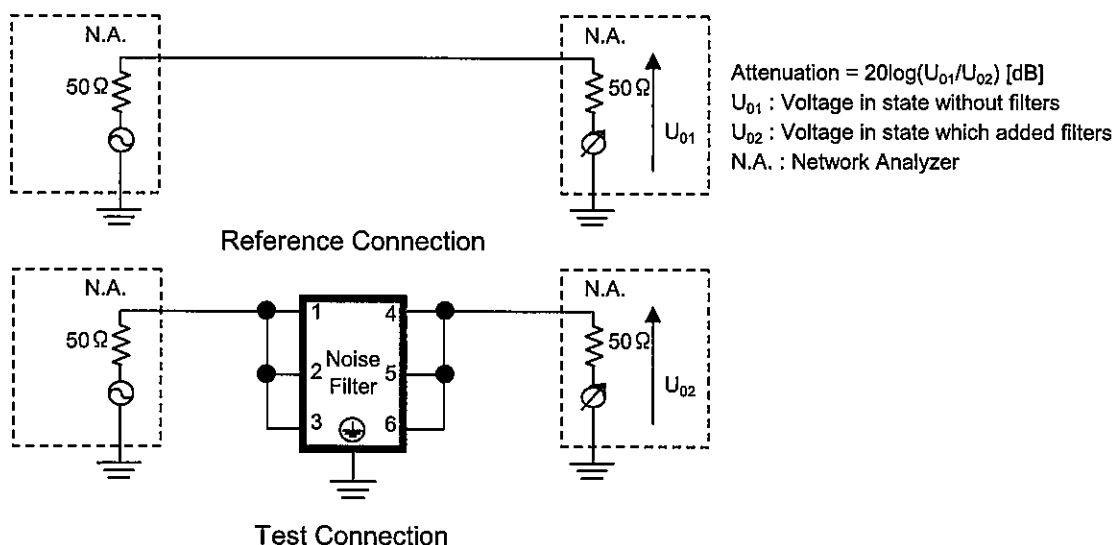


Figure A - 2 Common mode attenuation measurement

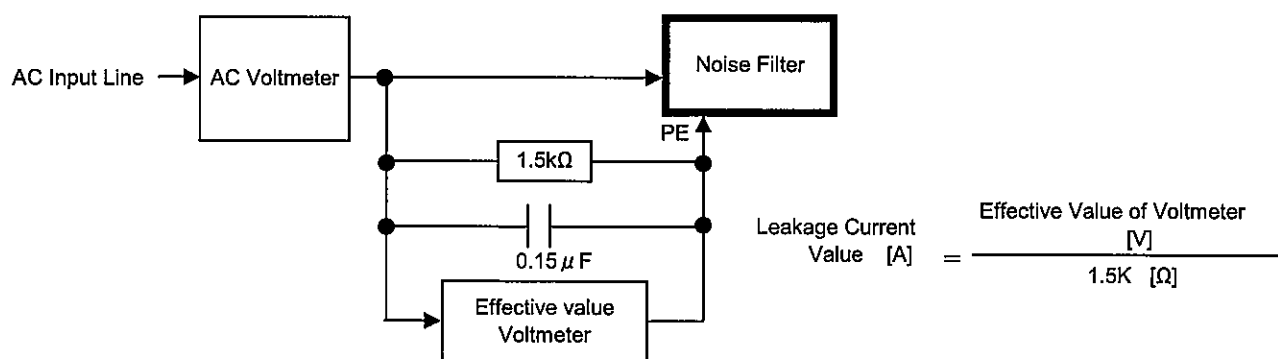


Figure B Leakage current measurement (UL1283)