


RADIATED EMISSION

Model Name :LDA100W-3
 Model No. :
 Serial No. :
 Points :2
 Detector :PEAK/QP
 Polarization :Hori.&Vert.
 Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz
 Temp. :25degC
 Humi. :44%
 Date :2001/5/16
 Test Equip. :R3132,ESPC
 Comment :

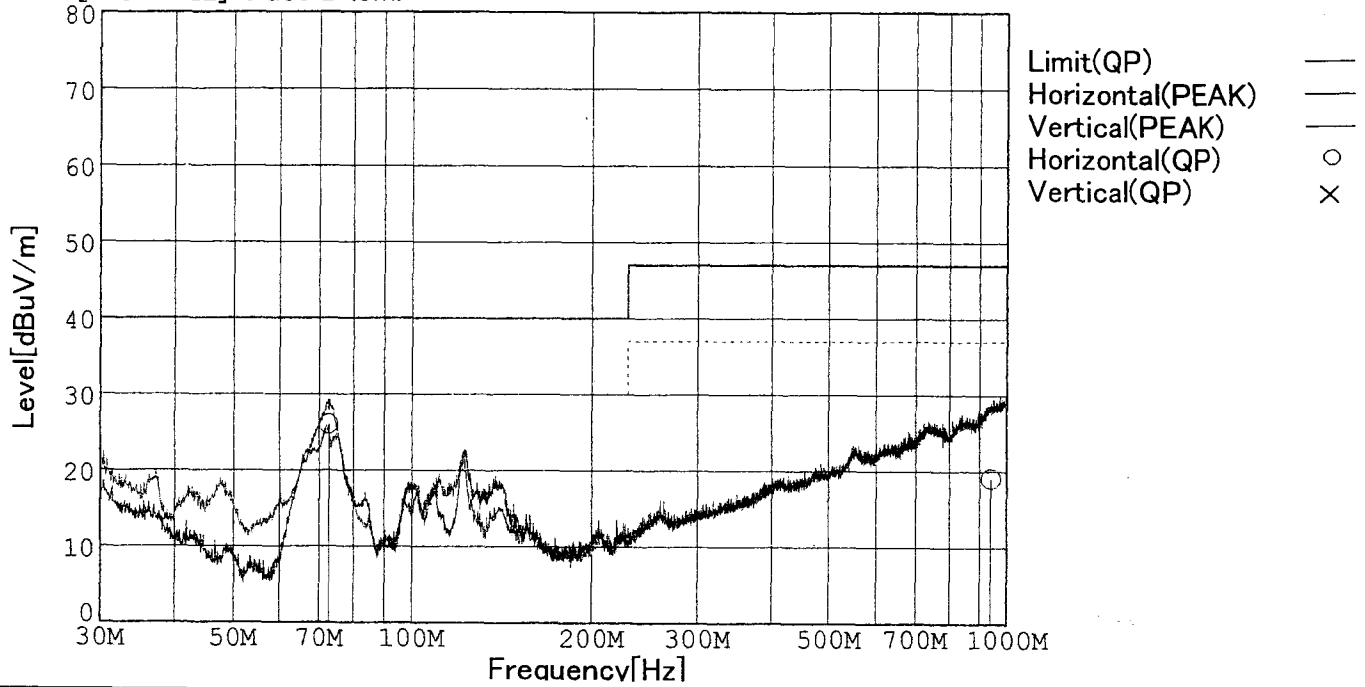


Frequency [MHz]	Meter Reading (QP) [dBuV]	Antena Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
72.742	51.8	5.9	-31.7	26.0	306	147	Hori.	40.0	14.0
939.688	23.4	25.0	-29.3	19.1	66	103	Hori.	47.0	27.9



LINE CONDUCTION

Model Name : LDA100W-3
 Model No. :
 Serial No. :
 Points : 4
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Limit1:[CISPR Pub22] Class B(QP)
 Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Humi. : 44%
 Date : 2001/5/16
 Test Equip. : R3132,ESPC
 Comment :

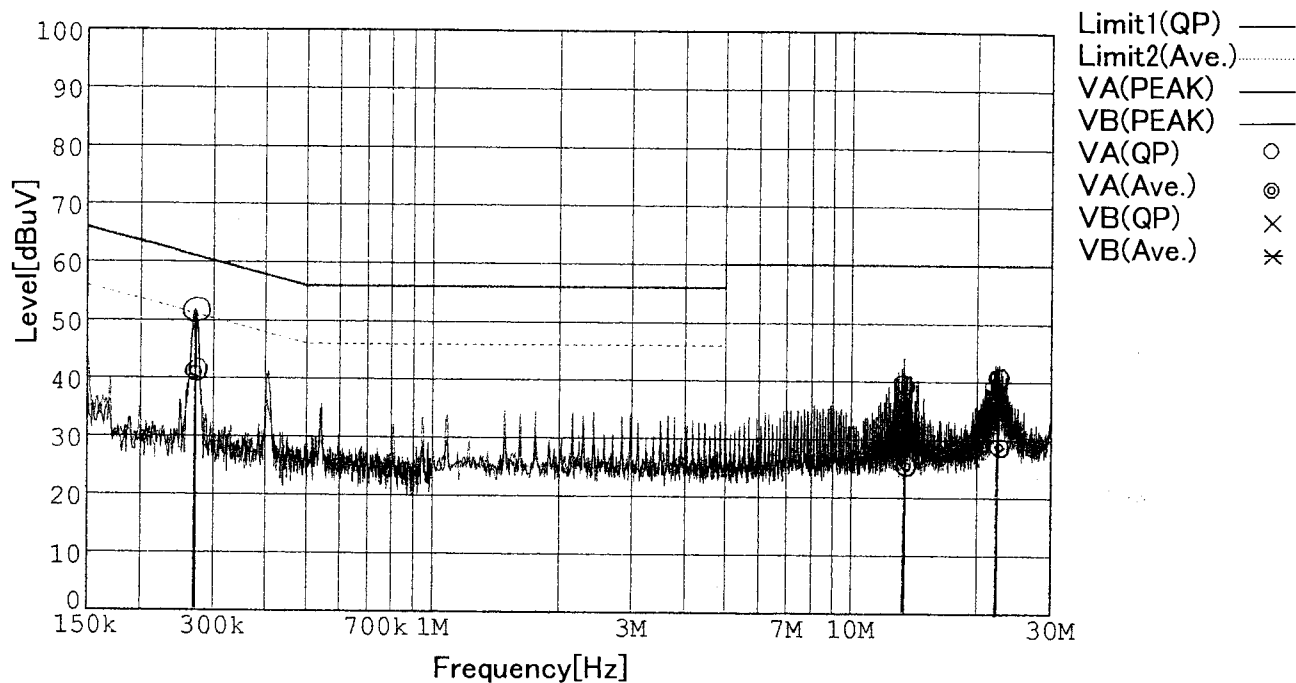

Frequency [MHz]	Meter Reading (Ave) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level (Ave) [dBuV]	Level (QP) [dBuV]	Line	Limit (Ave) [dBuV]	Limit (QP) [dBuV]	Margin (Ave) [dB]	Margin (QP) [dB]
0.2697	30.8	41.7	9.8	40.6	51.5	VA	51.1	61.1	10.5	9.6
13.3746	14.5	28.7	10.1	24.6	38.8	VA	50.0	60.0	25.4	21.2
22.6841	18.0	29.9	10.3	28.3	40.2	VA	50.0	60.0	21.7	19.8
0.2705	29.8	40.8	9.8	39.6	50.6	VB	51.1	61.1	11.5	10.5