


RADIATED EMISSION

Model Name :LDA100W-30
Model No. :
Serial No. :
Points :3
Detector :PEAK/QP
Polarization :Hori.&Vert.
Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz
Temp. :25degC
Humi. :44%
Date :2001/9/18 15:28
Test Equip. :R3132,ESPC
Comment :

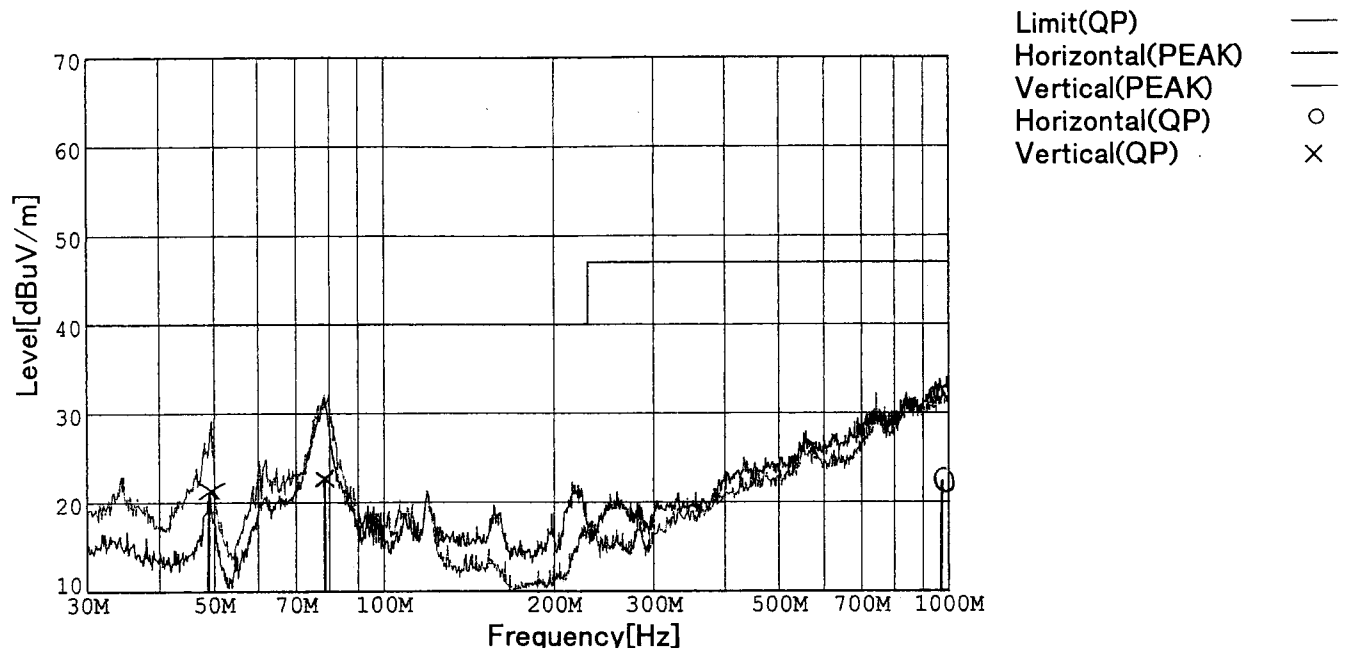


Frequency [MHz]	Meter Reading (QP) [dBuV]	Antena Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
986.457	21.3	25.0	-23.8	22.5	234	160	Hori.	47.0	24.5
48.931	37.5	7.6	-24.1	21.0	277	135	Vert.	40.0	19.0
77.941	40.7	6.3	-24.0	23.0	359	104	Vert.	40.0	17.0



LINE CONDUCTION

Model Name : LDA100W-30
 Model No. :
 Serial No. :
 Points : 4
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Limit1:[CISPR Pub22] Class B(QP)
 Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Humi. : 44%
 Date : 2001/9/17 17:18
 Test Equip. : R3132,ESPC
 Comment :

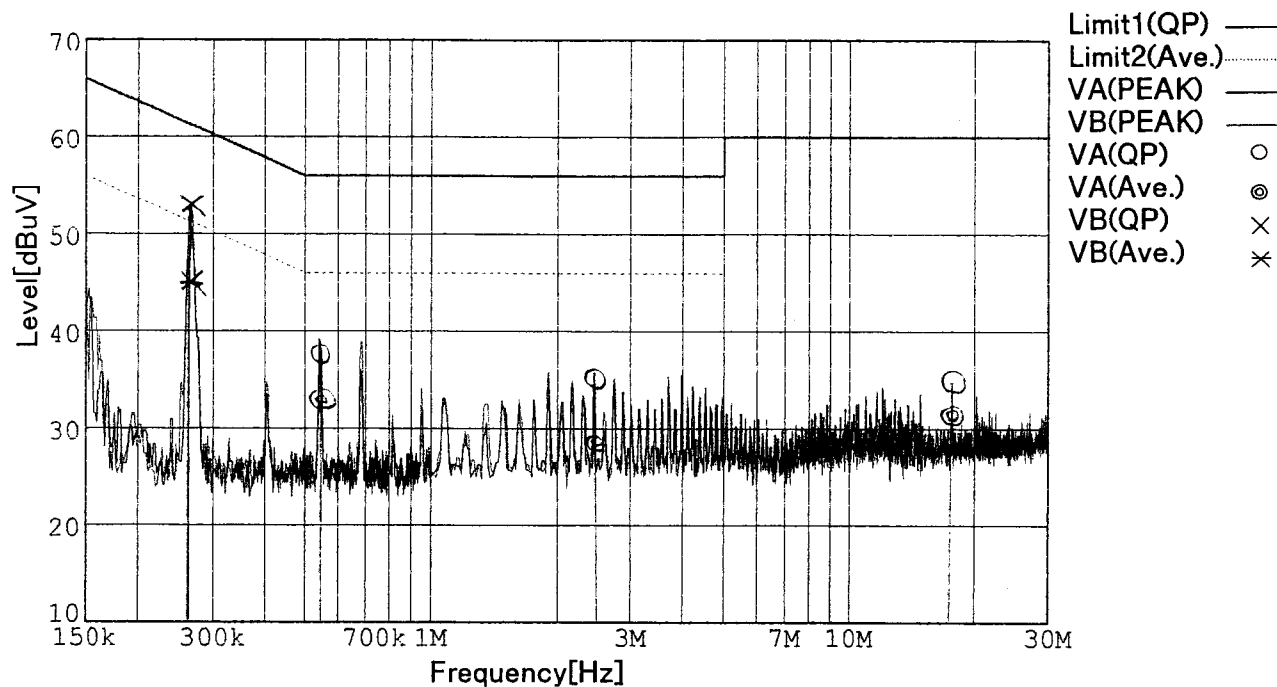

Frequency [MHz]	Meter Reading (QP) [dBuV]	Meter Reading (Ave.) [dBuV]	Factor [dB]	Level (QP) [dBuV]	Level (Ave.) [dBuV]	Line	Limit (QP) [dBuV]	Limit (Ave.) [dBuV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.5466	27.3	22.6	10.1	37.4	32.7	VA	56.0	46.0	18.6	13.3
2.4676	24.3	18.5	10.2	34.5	28.7	VA	56.0	46.0	21.5	17.3
17.6864	24.6	20.9	10.7	35.3	31.6	VA	60.0	50.0	24.7	18.4
0.2742	43.0	35.0	10.0	53.0	45.0	VB	61.0	51.0	8.0	6.0