


RADIATED EMISSION

Model Name :LDA100W-9
 Model No. :
 Serial No. :
 Points :1
 Detector :PEAK/QP
 Polarization :Hori.&Vert.
 Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz
 Temp. :25degC
 Humi. :44%
 Date :2001/7/25 17:42
 Test Equip. :R3132,ESPC
 Comment :

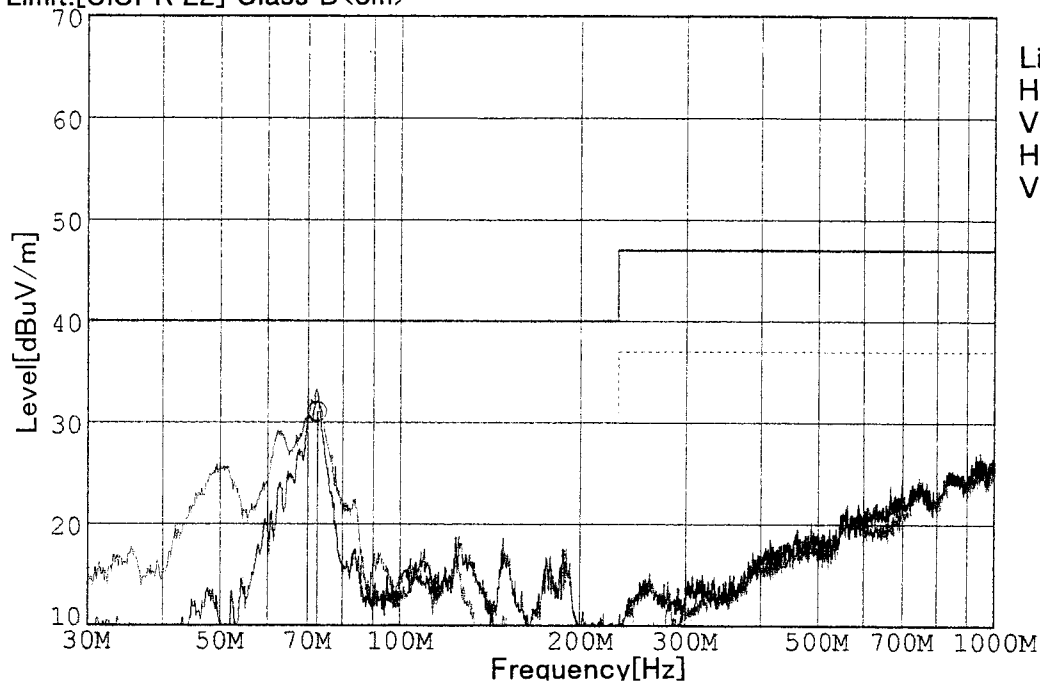

Frequency [MHz]	Meter Reading (QP) [dBuV]	Antena Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
72.388	50.4	5.5	-24.8	31.1	291	159	Hori.	40.0	8.9



LINE CONDUCTION

Model Name :LDA100W-9

Model No. :

Serial No. :

Points :2

Detector :PEAK/QP/Ave.

Line Mode :VA/VB

Limit1:[CISPR Pub22] Class B(QP)

Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply :230V(1 Phase) 50Hz


Temp. :25degC

Humi. :44%

Date :2001/7/25 15:09

Test Equip. :R3132,ESPC

Comment :

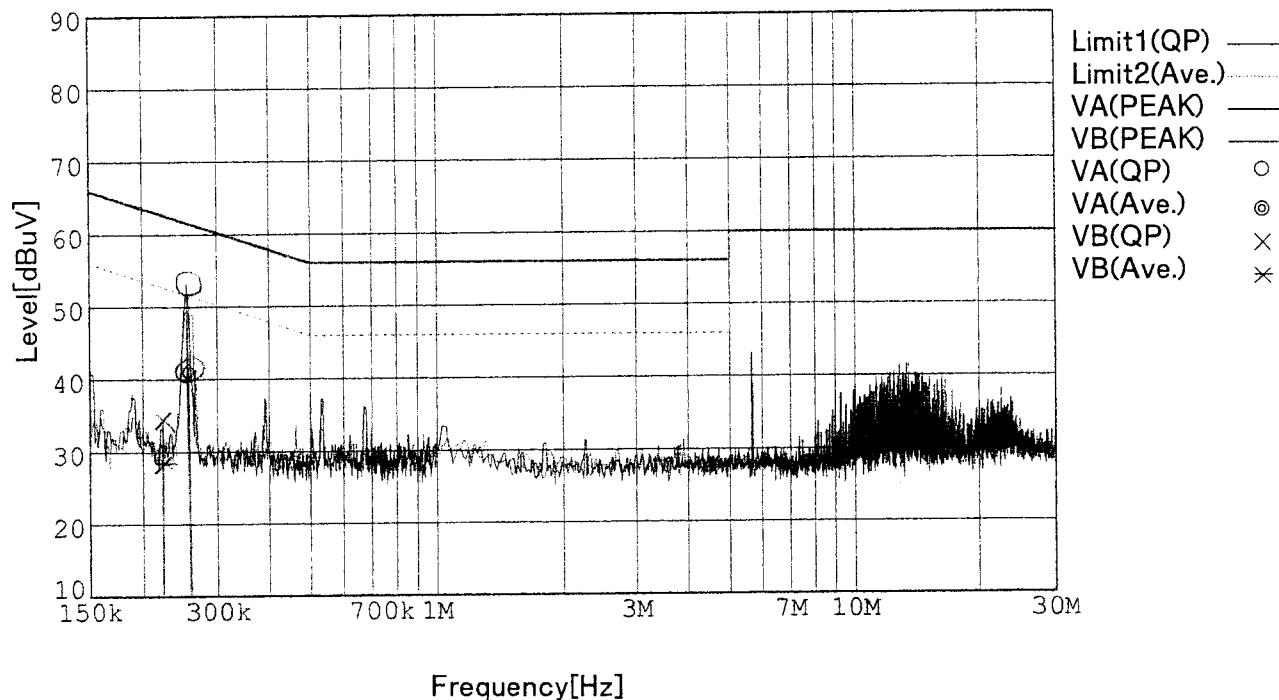

Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level (Ave.) [dBuV]	Level (QP) [dBuV]	Line	Limit (Ave.) [dBuV]	Limit (QP) [dBuV]	Margin (Ave.) [dB]	Margin (QP) [dB]
0.2707	31.0	42.5	10.0	41.0	52.5	VA	51.1	61.1	10.1	8.6
0.2559	17.3	22.8	10.0	27.3	32.8	VB	51.6	61.6	24.3	28.8