


RADIATED EMISSION

Model Name :LDA10F-3
 Model No. :
 Serial No. :
 Points :3
 Detector :PEAK/QP
 Polarization :Hori.&Vert.
 Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz
 Temp. :25degC
 Humi. :44%
 Date :2001/2/20
 Test Equip. :R3132,ESPC
 Comment :

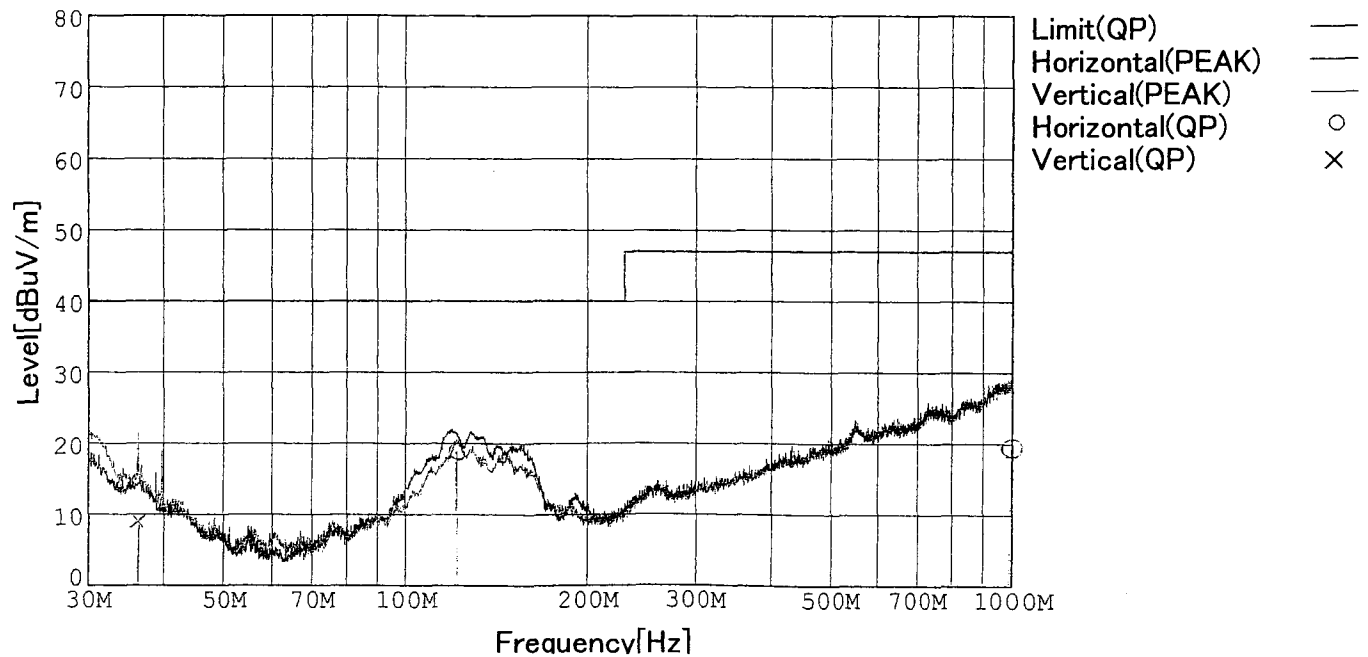


Frequency [MHz]	Meter Reading (QP) [dBuV]	Antena Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
117.070	39.1	10.9	-31.5	18.5	113	144	Hori.	40.0	21.5
996.199	23.2	25.3	-29.2	19.3	37	135	Hori.	47.0	27.7
36.332	26.4	15.0	-32.0	9.4	52	130	Vert.	40.0	30.6



LINE CONDUCTION

Model Name : LDA10F-3
 Model No. :
 Serial No. :
 Points : 3
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Limit1:[CISPR Pub22] Class B(QP)
 Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Humi. : 44%
 Date : 2001/2/20
 Test Equip. : R3132,ESPC
 Comment :

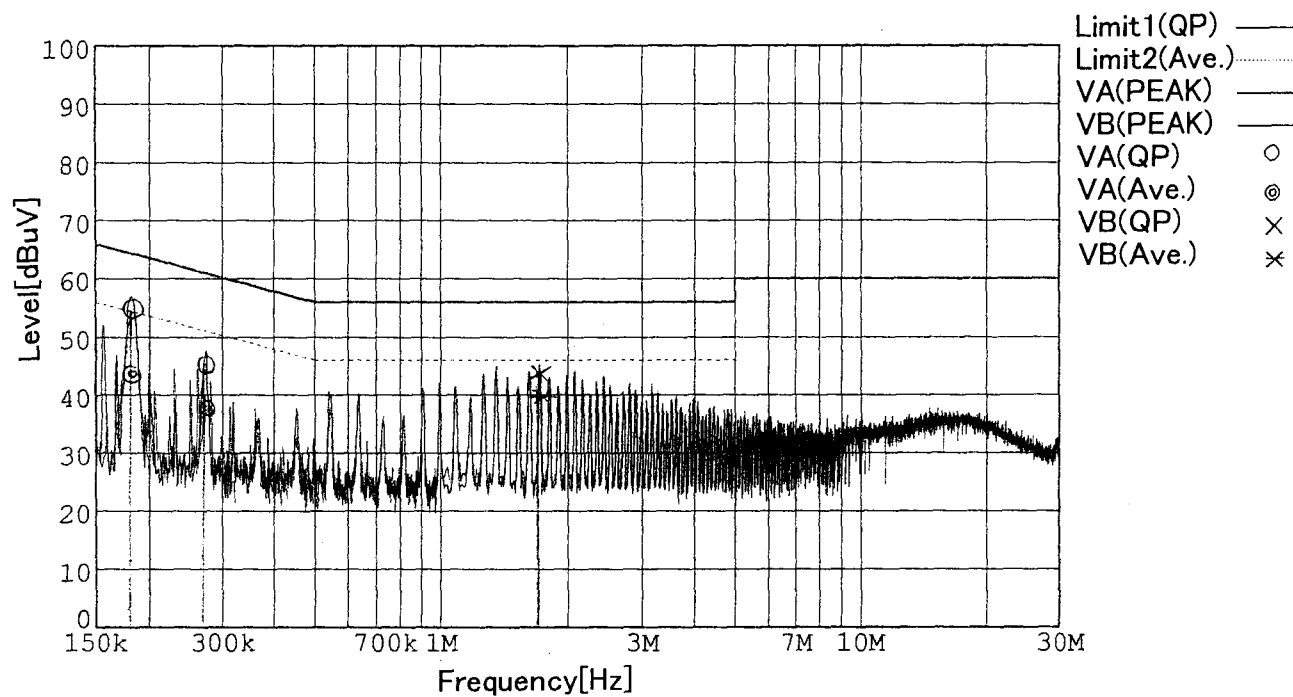

Frequency [MHz]	Meter Reading (QP) [dBuV]	Meter Reading (Ave.) [dBuV]	Factor [dB]	Level (QP) [dBuV]	Level (Ave.) [dBuV]	Line	Limit (QP) [dBuV]	Limit (Ave.) [dBuV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.1798	45.1	33.3	9.8	54.9	43.1	VA	64.5	54.5	9.6	11.4
0.2723	35.6	28.0	9.8	45.4	37.8	VA	61.1	51.1	15.7	13.3
1.7126	33.6	29.8	9.9	43.5	39.7	VB	56.0	46.0	12.5	6.3